




SPRAYSTRIKER™

DISINFECTION SPRAYER



MADE IN FINLAND

500-2000 liter • For pickups and light trucks • GPS-Speedcontrol • All-season sprayer

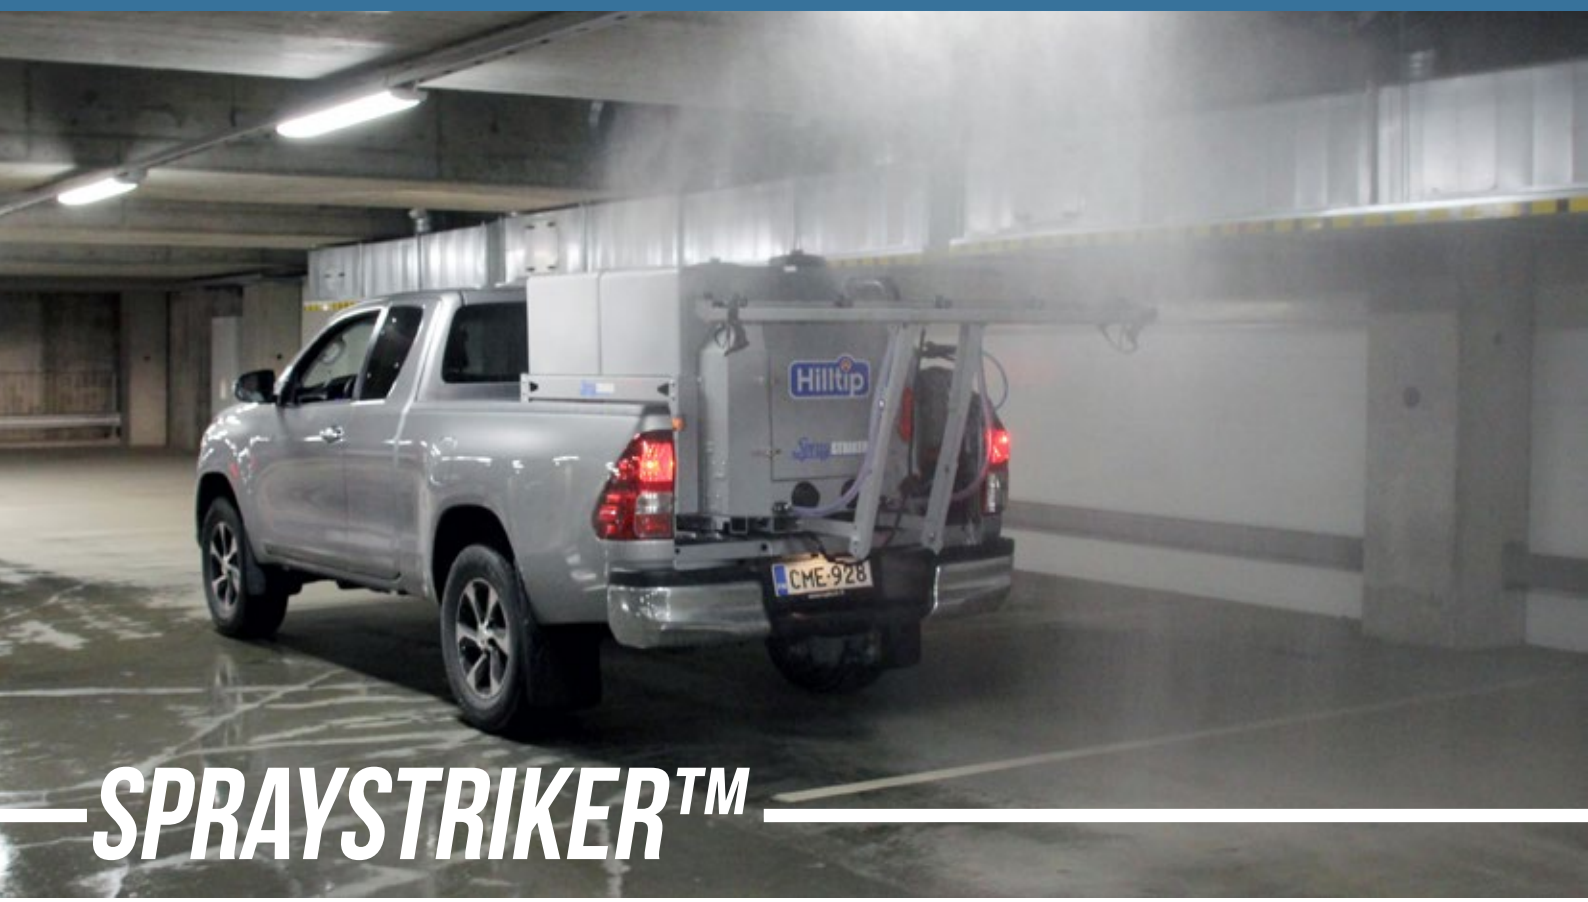

SPRAYSTRIKER™

SPRAYER APPLICATIONS

The Hilltip SprayStriker™ sprayer is designed for disinfection of city centers, shopping malls, bus and train stations etc. as well as hard to reach areas with our hose reel option. The sprayer is available with a special telescopic disinfection spraybar that is spraying from the height of 2 m, to have the maximum spray exposure.

When disinfecting, it is not only the disinfectant that is important, but also how you spread it. The well-designed nozzles on the spraybar produces small droplets of less than 140 microns. The small droplets or mist cover the entire surface and the disinfectant is sufficient for a larger area. Hilltip has a long experience of liquid sprayers.

STANDARD CONTROLLER

The color screen controller lets you customize your spraying session according to your current situation. Automatic GPS-speedcontrol (optionally via Canbus vehicle speed) adjusts the liquid flow (ml/m^2) according to your vehicle speed, while manual mode lets you insert a fixed flow. The controller additionally collects and saves essential data to an USB memory, allowing you to generate simple reports. The controller also makes it easy to turn on functions, like beacon and work light, from inside the cabin.

SPRAYER DESIGN

The liquid sprayer is designed for maximum liquid tank capacity and for use on variety of vehicles, trucks and machines worldwide. The durable and light poly tanks are supported by a powder coated stainless-steel frame construction. The liquid pumps and CPU-unit is protected inside an easy-to-reach stainless-steel housing. The electric 12V SprayStriker™ is easy to use and quiet so it can be used in residential areas.

GPS-speedcontrol as standard function





Optional hose reel for hard-to-reach areas



SprayStriker™ 1000 liter

SPRAYER FUNCTIONS

- ✓ 12 V Twin pumps.
- ✓ 10 ml/m² at max speed 12 km/h.
- ✓ 2" camlock inlet for filling sprayer.
- ✓ Nozzles with droplets less than 140 microns.
- ✓ GPS-speedcontrol adjusts the liquid flow (ml/m²) according to your vehicle speed.
- ✓ Controller lets you operate the sprayer and its functions from inside the cabin.
- ✓ 2 m spraybar with double spray nozzles (7 + 7).
- ✓ Nozzles on the end of the boom, for extended spray width.



Double spray nozzles

OPTIONAL FEATURES

- + 12 m hose reel for spraying sidewalks and other hard-to-reach areas.
- + Beacon warning-light
- + Adjustable leg stands
- + Electric solenoids on end-nozzles

OPTIONAL HTRACK™ SYSTEM

Track and manage all of your sprayers online on your computer, tablet or smartphone. The program shows treatment route on map, and spraying details like speed, GPS location, material used etc. With HTrack™ you can keep track of your expenses and get performance evidence for clients. The spraying data can be summarized and generated as PDF reports.



The optional HTrack™ program transfers spreading data via mobile network



SPRAYER SPECIFICATIONS

MODEL	500 LITER	1000 LITER	1500 LITER	2000 LITER
Height	1050 mm	1050 mm	1050 mm	1050 mm
Width	1060 mm	1060 mm	1060 mm	1060 mm
Length	1000 mm	1600 mm	2250 mm	2850 mm
Tank volume	500 l	1000 l	1500 l	2000 l
Spray width (max)	5 m	5 m	5 m	5 m
Spray volume*	5-36 l/min	5-36 l/min	5-36 l/min	5-36 l/min
Weight	180 kg	230 kg	280 kg	350 kg

* Depending on nozzle size @ 4 bar



HillTip Oy Ab
Pukkisaarentie 6
FIN-68600 Pietarsaari
Finland

+358 (0) 505983026
+358 (0) 503659415

www.hilltip.com
info@hilltip.com



Specifications and other details are subject to change without notice.