

SPECIFICATIONS

HW140

Tier 4 Final Engine

Net Power

SAE J1349 / 149 HP
(111 kW) at 2,150 rpm

Bucket Range

0.23 m³ - 0.71 m³
0.30 yd³ - 0.93 yd³

Standard Bucket

0.58 m³ (0.76 yd³)

Operating Weight

13,880 kg (30,600 lb)

ENGINE			
Maker / Model	Cummins QSB 6.7		
Type	Water-cooled, 4-cycle diesel, 6-cylinder in-line, Direct injection, Turbocharged, Charge air cooled, Low emission		
Rated flywheel horse power	SAE	J1995 (gross)	157 HP (117 kW) at 2,150 rpm
		J1349 (net)	149 HP (111 kW) at 2,150 rpm
Max. torque	68.5 kgf.m (496 lbf.ft) at 1,500 rpm		
Bore x stroke	107 x 124 mm (4.21" x 4.88")		
Piston displacement	6,700 cc (409 in ³)		
Batteries	2 x 12 V x 100 Ah		
Starting motor	24 V - 4.8 kW		
Alternator	24 V - 95 Amp		

HYDRAULIC SYSTEM

MAIN PUMP	
Type	Two variable displacement piston pumps
Max. flow	2 X 172 l/min (45.4 gpm)
Sub-pump for pilot circuit (Gear Pump)	32.31 l/min (8.5 gpm)

CROSS-SENSING AND FUEL-SAVING PUMP SYSTEM

HYDRAULIC MOTORS	
Travel	Bent - axis pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement circuits	400 kgf/cm ² (5,690 psi)
Travel	380 kgf/cm ² (5,400 psi)
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,400 psi)
Swing circuit	285 kgf/cm ² (4,050 psi)
Pilot circuit	40 kgf/cm ² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS	
No. of cylinder bore X stroke	Boom: 2-105 x 1075 mm (4.1" x 42.3")
	Arm: 1-115 x 1138 mm (4.5" x 46.8")
	Bucket: 1-100 x 850 mm (3.9" x 33.1")
	Blade: 2-100 x 236 mm (3.9" x 9.3")
	Outrigger: 2-110 x 446 mm (4.9" x 18.7")
	2-PCS boom: 2-105 x 975mm (4.1" x 38.4")
	Adjust (boom): 1-145 x 613mm (5.7" x 24.1")

DRIVES & BRAKES

4-wheel hydrostatic drive. Constant mesh, helical gear transmission provides 2 forward and reverse travel speeds.

Max. drawbar pull	7,800 kgf (17,200 lbf)
Travel speed	1st 6.2 mph 2nd 24.2 mph
Gradeability	35° (70 %)

Service Brake :

- Independent dual brake, front and rear axle full hydraulic power brake.
- Spring released and hydraulic applied wet type multiple disc brake.

Parking Brake :

- Spring applied and hydraulic released wet disc brake type in transmission.

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatiguelless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
---------------	--



OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 4,600 mm (15' 11") mono boom, 2,100 mm (6' 11") arm, SAE heaped 0.58 m³ (0.76 yd³) backhoe bucket, lubricant, coolant, full fuel tank, hydraulic tank and the standard equipment.

OPERATING WEIGHT	
Rear dozer blade	13,880 (30,600)
Rear outrigger	14,280 (31,480)
Front outrigger and rear blade	14,880 (32,800)
Front blade and rear outrigger	14,880 (32,800)
Four outrigger	14,630 (32,250)

SWING SYSTEM

Swing motor	Fixed displacement axial pistons motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake (option)	Multi wet disc
Swing speed	11.6 rpm

SERVICE REFILL CAPACITIES

	liter	US gal
Re-filling		
Fuel tank	270	71.3
Engine coolant	19.5	5.2
Engine oil	23.7	6.3
Swing device	3.5 (2.5)	0.92 (0.7)
Axle	front 13.8	3.6
	rear 16.1	4.3
Transmission	2.5	0.7
Hydraulic system (including tank)	210	55.5
Hydraulic tank	120	31.7
DEF / AdBlue® Tank	27	7.1

UNDERCARRIAGE


Reinforced box-section frame is all-welded, low-stress.

Dozer blade and outriggers are available. A pin-on design.

Dozer blade	A very useful addition for leveling and back filling or clean-up work.
Outrigger	Indicated for max. operation stability when digging and lifting. Can be mounted on the front/or the rear.

SPECIFICATIONS HW140

Tier 4 Final Engine

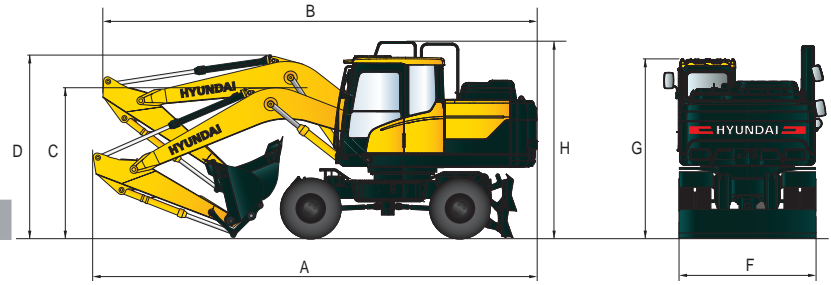

HW140 DIMENSIONS

Unit: mm (ft-in)


4.6 m (15' 1") mono boom, 1.9 m (6' 3"), 2.1 m (6' 11"), 2.5 m (8' 2"), 3.0 m (9' 10"), arm, front outrigger and rear dozer blade

Boom length	4,600 (15' 1") Mono			
Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
A Overall length of shipping position	7,760 (25' 6")	7,820 (25' 8")	7,770 (25' 6")	7,830 (25' 8")
B Overall length of traveling position	7,750 (25' 5")	7,760 (25' 6")	7,690 (25' 3")	7,710 (25' 4")
C Height of attachment (shipping position)	2,760 (9' 1")	2,860 (9' 5")	2,810 (9' 3")	3,100 (10' 2")
D Height of attachment (traveling position)	3,500 (11' 6")	3,500 (11' 6")	3,620 (11' 11")	3,600 (11' 10")
F Overall width	2,500 (8' 2")	2,500 (8' 2")	2,500 (8' 2")	2,500 (8' 2")
G Height of cabin	3,140 (10' 4")	3,140 (10' 4")	3,140 (10' 4")	3,140 (10' 4")
H Overall height of guardrail	3,390 (11' 1")	3,390 (11' 1")	3,390 (11' 1")	3,390 (11' 1")

HW140 WORKING RANGE

Unit : mm (ft-in)

Boom length	4,600 (15' 1") Mono			
Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
A Max. digging reach	7,750 (25' 5")	7,920 (26' 0")	8,320 (27' 4")	8,780 (28' 10")
A' Max. digging reach on ground	7,530 (24' 8")	7,700 (25' 3")	8,120 (26' 8")	8,590 (28' 2")
B Max. digging depth	4,650 (15' 3")	4,850 (15' 11")	5,250 (17' 3")	5,750 (18' 10")
B' Max. digging depth (8' level)	4,390 (14' 5")	4,600 (15' 1")	5,040 (16' 6")	5,570 (18' 3")
C Max. vertical wall digging depth	4,350 (14' 3")	4,460 (14' 8")	5,030 (16' 6")	5,550 (18' 3")
D Max. digging height	8,400 (27' 7")	8,470 (27' 9")	8,790 (28' 10")	9,070 (29' 9")
E Max. dumping height	5,960 (19' 7")	6,040 (19' 10")	6,350 (20' 10")	6,620 (21' 9")
F Min. swing radius	2,620 (8' 7")	2,670 (8' 10")	2,650 (8' 8")	2,670 (8' 9")

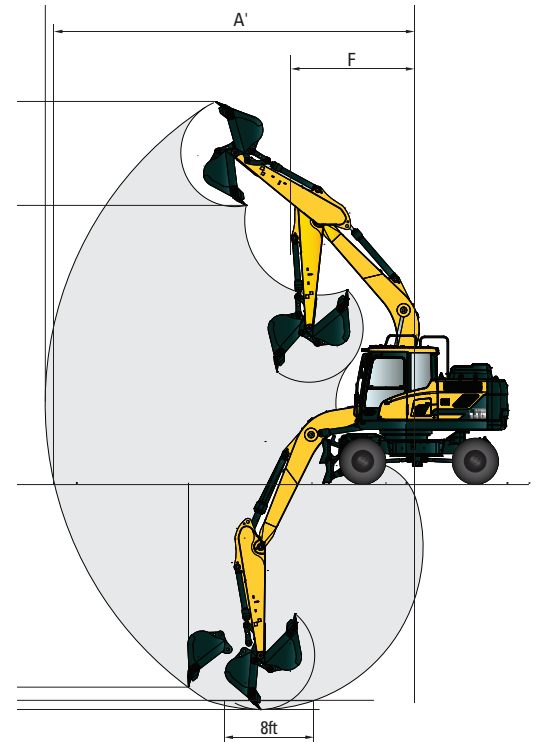

DIGGING FORCE

Arm	Length	mm (ft.in)	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")	[Power Boost]
	Bucket digging force	Weight	kg (lb)	560 (1,230)	580 (1,280)	610 (1,340)	
SAE			kN	87.3 [94.8]	87.3 [94.8]	87.3 [94.8]	
		kgf	8,900 [9,660]	8,900 [9,660]	8,900 [9,660]	8,900 [9,660]	
		lbf	19,620 [21,300]	19,620 [21,300]	19,620 [21,300]	19,620 [21,300]	
		ISO	kN	102 [110.8]	102 [110.8]	102 [110.8]	
kgf			10,400 [11,290]	10,400 [11,290]	10,400 [11,290]	10,400 [11,290]	
Arm crowd force	SAE	lbf	22,930 [24,890]	22,930 [24,890]	22,930 [24,890]	22,930 [24,890]	
		kN	76.5 [83.1]	73.6 [79.9]	62.8 [68.2]	55.9 [60.7]	
	ISO	kgf	7,800 [8,470]	7,500 [8,140]	6,400 [6,950]	5,700 [6,190]	
		lbf	17,200 [18,670]	16,530 [17,950]	14,110 [15,320]	12,570 [13,640]	
		kN	80.4 [87.3]	77.5 [84.1]	65.7 [71.4]	57.9 [62.8]	
		kgf	8,200 [8,900]	7,900 [8,580]	6,700 [7,270]	5,900 [6,410]	
lbf	18,080 [19,630]	17,420 [18,910]	14,770 [16,040]	13,010 [14,120]			

Note: Arm weight includes bucket cylinder, linkage, and pin

SPECIFICATIONS HW140

Tier 4 Final Engine

BUCKETS

All buckets are welded with high-strength steel.



SAE heaped
m³ (yd³)

0.23 (0.30)



0.40 (0.52)
0.46 (0.60)



0.52 (0.68)
0.58 (0.76)




0.65 (0.85)



0.71 (0.93)



0.45 (0.59)



0.55 (0.72)

Capacity m ³ (yd ³)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft.in)						
					4.6 (15' 1") Boom				4.9 (16' 1") 2-Piece Boom		
SAE heaped	CECE heaped	Without side cutters	With side cutters		1.9 (6' 3") Arm	2.1 (6' 11") Arm	2.5 (8' 2") Arm	3.0 (9' 10") Arm	1.9 (6' 3") Arm	2.1 (6' 11") Arm	2.5 (8' 2") Arm
0.23 (0.30)	0.20 (0.26)	520 (20.5)	620 (24.4)	335 (740)	●	●	●	●	●	●	●
0.40 (0.52)	0.35 (0.46)	750 (29.5)	850 (33.5)	410 (900)	●	●	●	●	●	●	●
0.46 (0.60)	0.40 (0.52)	840 (33.1)	940 (37.0)	435 (960)	●	●	●	■	●	●	■
0.52 (0.68)	0.45 (0.59)	915 (36.0)	1,015 (40.0)	460 (1,010)	●	●	■	▲	●	■	■
0.58 (0.76)	0.50 (0.65)	1,000 (39.4)	1,100 (43.3)	480 (1,060)	●	■	■	▲	■	▲	▲
0.65 (0.85)	0.55 (0.72)	1,105 (43.5)	1,205 (47.4)	500 (1,100)	■	▲	▲	-	▲	▲	-
0.71 (0.93)	0.60 (0.78)	1,190 (46.9)	1,290 (50.8)	540 (1,190)	▲	▲	-	-	▲	-	-
■ 0.45 (0.59)	0.40 (0.52)	1,520 (59.8)	-	410 (900)	●	●	■	-	■	■	▲
● 0.55 (0.72)	0.45 (0.59)	1,800 (70.9)	-	585 (1,290)	■	▲	▲	-	■	▲	▲

- Ditching bucket
- Slope finishing bucket

- : Applicable for materials with density of 2,000 kgf/m³ (3,370 lbf/yd³) or less
- : Applicable for materials with density of 1,600 kgf/m³ (2,700 lbf/yd³) or less
- ▲ : Applicable for materials with density of 1,100 kgf/m³ (1,850 lbf/yd³) or less

Lifting Capacity

Boom: 4,600 mm (15')
Arm: 2,100 mm (6'8")
Bucket: 0.70 m³ (0.92 yd³) SAE heaped
CWT 2,200 kg (4,850 lb)

Capacities based on North American Standard Configuration in accordance with ISO condition 2 standard.



Rating over front



Rating over side or 360 degree

Lift-point height m (ft)		Lift-point radius								At max. reach		m (ft)
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
6.0 m (20 ft)	kg					*3,870	*3,870			*3,400	*3,400	5.17 (17.0)
	lb					*8,530	*8,530			*7,500	*7,500	
4.5 m (15 ft)	kg					*4,230	*4,230	*3,740	3,710	*3,200	*3,200	6.10 (20.0)
	lb					*9,330	*9,330	*8,250	8,180	*7,050	*7,050	
3.0 m (10 ft)	kg					*5,200	*5,200	*4,340	3,650	*3,240	3,170	6.57 (21.5)
	lb					*11,460	*11,460	*9,570	8,050	*7,140	6,990	
1.5 m (5 ft)	kg					*6,220	5,480	*4,750	3,560	*3,480	3,050	6.66 (21.8)
	lb					*13,710	12,080	*10,470	7,850	*7,670	6,720	
Ground Line	kg			*6,800	*6,800	*6,740	5,350	*4,970	3,500	*4,030	3,200	6.40 (21.0)
	lb			*14,990	*14,990	*14,860	11,790	*10,960	7,720	*8,880	7,050	
-1.5 m (-5 ft)	kg	*6,280	*6,280	*9,720	*9,720	*6,560	5,330			*4,860	3,740	5.74 (18.8)
	lb	*13,850	*13,850	*21,430	*21,430	*14,460	11,750			*10,710	8,250	
-3.0 m (-10 ft)	kg			*7,820	*7,820	*5,030	*5,030			*5,020	*5,020	4.50 (14.8)
	lb			*17,240	*17,240	*11,090	*11,090			*11,070	*11,070	

NOTES:

- Lifting capacities are based on ISO 10567.
- Lifting capacities for the HX series do not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The lift-point is the bucket pivot mounting pin on the arm (without bucket mass).
- (*) indicates load limited by hydraulic capacity.

SPECIFICATIONS HW140

Tier 4 Final Engine

ENGINE	STD	OPT
Cummins QSB 6.7 engine	•	
HYDRAULIC SYSTEM	STD	OPT
Intelligent Power Control (IPC)		
3-power mode, 2-work mode, user mode	•	
Variable Power Control	•	
Pump Flow Control	•	
Attachment Mode Flow Control		•
Engine Auto Idle	•	
Engine Auto Shutdown Control		•
Electronic Fan Control	•	
CAB & INTERIOR	STD	OPT
ISO Standard cabin		
Rise-up type windshield wiper	•	
Radio / USB player	•	
Handsfree mobile phone system with USB	•	
12 volt power outlet (24V DC to 12V DC converter)	•	
Electric horn	•	
All-weather steel cab with 360° visibility	•	
Safety glass windows	•	
Sliding fold-in front window	•	
Sliding side window (LH)	•	
Lockable door	•	
Hot & cool box	•	
Storage compartment and Ashtray	•	
Transparent cabin roof-cover	•	
Sun visor	•	
Door and cab locks, one key	•	
Mechanical suspension seat with heater	•	
Pilot-operated slidable joystick	•	
Console box height adjust system	•	
Cabin lights		•
Cabin front window rain guard		•
Cabin roof-steel cover		•
Automatic climate control		
Air conditioner & heater	•	
Defroster	•	
Starting Aid (air grid heater) for cold weather	•	
Centralized monitoring		
8" LCD display	•	
Engine speed or trip meter/Accel.	•	
Engine coolant temperature gauge	•	
Max power	•	
Low speed/high speed	•	
Auto idle	•	
Overload	•	
Check Engine	•	
Air cleaner clogging	•	
Indicators	•	
Lowercase gauges	•	
Fuel level gauge	•	
Hydraulic oil temperature gauge	•	
Fuel warmer	•	
Warnings	•	
Communication error	•	
Low battery	•	
Clock	•	

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information.
The machine may vary according to International standards.

* The photos may include attachments and optional equipment that are not available in your area.

CAB & INTERIOR	STD	OPT
Seat		
Adjustable air suspension seat with heater	•	
Cabin FOPS/FOG		
FOPS (Falling Object Protective Structures) ISO 3449 Level 2		•
FOG (Falling Object Guard)		•
Cabin ROPS		
ROPS (Roll Over Protective Structures)	•	
SAFETY	STD	OPT
Battery master switch	•	
Rearview camera		•
AAVM (Advanced Around View Monitoring)		•
Four front working lights (2 boom mounted, 2 front frame mounted)	•	
Travel alarm	•	
Rear work lamp		•
Beacon lamp		•
Automatic swing brake	•	
Boom holding system	•	
Arm holding system	•	
Safety lock valve for boom cylinder with overload warning device		•
Safety lock valve for arm cylinder		•
Swing lock system		•
Four outside rearview mirror	•	
OTHER	STD	OPT
Booms		
4.6 m, 15' 1" Mono	•	
4.9 m, 16' 1" 2-Piece		•
4.1 m, 13' 5"		•
Arms		
1.9 m, 6' 3"		•
2.1 m, 6' 11"	•	
2.5 m, 8' 2"		•
3.0 m, 9' 11"		•
Removable clean-out dust net for cooler	•	
Removable reservoir tank	•	
Fuel pre-filter	•	
Fuel warmer	single	
	dual	•
Self-diagnostics system	•	
Hi-mate Remote Management System	Mobile	•
	Satellite	•
Batteries (2 x 12V x 100 AH)	•	
Fuel filler pump (35 l/min)		•
Single-acting piping kit (breaker, etc.)		•
Double-acting piping kit (clamshell, etc.)		•
Rotating piping kit		•
Quick coupler piping		•
Quick coupler		•
Accumulator for lowering work equipment	•	
Pattern change valve (2 patterns)		•
Fine swing control system		•
Tool kit		•
Auto cruiser system	•	
Travel pedal (2way)		•
UNDERCARRIAGE	STD	OPT
Rear-dozer blade	•	
Front outrigger and rear blade		•
Front and rear outrigger		•
Front blade and rear outrigger		•
Tires-dual (10.00-20-14PR tube)	•	
Tires-dual (10.00-20 solid)		•
Fenders (mudguards)		•

* Materials and specifications are subject to change without advance notice.
* All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT



www.hceamericas.com

6100 Atlantic Blvd., Norcross, GA 30071

TEL (678) 823 7777 FAX (678) 823 7778