

# WOODS BATWING® CUTTERS



We not only build the toughest Batwing®,  
we build the only Batwing®

**WOODS**

# WOODS

## Batwing® Cutters

### Table of Contents

<b>BW12</b> .....	<b>4</b>
<b>BW10.50 / BW15.50</b> .....	<b>5</b>
<b>BW10.60 / BW15.60</b> .....	<b>6-7</b>
<b>BW10.70 / BW15.70</b> .....	<b>6-7</b>
<b>BEST BATWING EVER</b> .....	<b>8-9</b>
<b>BW240X / BW240XHD</b> .....	<b>10</b>
<b>BW1620X / BW2400X</b> .....	<b>11</b>

CONTENTS



Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

### Woods

**GENUINE PARTS**

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

#### Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at [woodsequipment.com](http://woodsequipment.com) or call 800-319-6637.



# WOODS

800-319-6637 | [woodsequipment.com](http://woodsequipment.com)







*Rotary Cutters*

**OVER 50 YEARS AGO, WOODS®  
INTRODUCED THE ORIGINAL  
FLEXWING ROTARY CUTTER,  
THE BATWING®. IT INSTANTLY  
BECAME A HOUSEHOLD NAME  
FOR FLEXWING CUTTERS. WHY?  
BECAUSE YOU NEEDED A RUGGED  
PIECE OF EQUIPMENT THAT  
COULD TACKLE THE TOUGHEST  
RURAL MOWING JOBS... AND  
THE BATWING DELIVERED.**

**BW15.50**  
Shown with standard  
chain shielding



## Batwing® Cutters

12-FOOT SERIES



**BW12**  
Shown with standard chain shielding

SPECIFICATIONS	
MODEL	BW12
Tractor PTO HP	35 - 75
Cutting Height	2" - 12"
Cut Capacity (inches)	1.5"
Cutting Width (inches)	144"
Blade Tip Speed	14,300 fpm center / 14,900 fpm wing
Weight	2450 lbs
Tongue Weight	750 lbs
Center Deck / Wing Deck	12 gauge
Side Skirt Thickness	7 gauge
Side Skirt Depth	11"
Transport Width	96"
Stump Jumper	oval
Flex	90° up / 22° down
Driveline Rating	CAT 4 CV main CAT 3 wing
Splitter Gearbox Rating	160 hp
Wings Gearbox Rating	75 hp
Output Shaft Size	1.57" dia.
Gearbox Warranty	6 years

### TRACTOR PTO HP RANGE: MINIMUM 35 HP

#### Model

**BW12** | 12-foot Dual-wing Cutter for compact/utility tractors

Requiring a minimum of 35 hp, the BW12 gives you Woods quality and performance in a sleek, round-front design and our industry-leading sloped deck.

- Total weight 2,450 lbs with 750 lb tongue weight, ideal for use on lower horsepower compact and utility tractors.
- Twelve gauge, high-strength steel and smooth, sloped deck provide durability for long life.
- Fully baffled deck, ensures better distribution of cut material, and the performance you expect.
- Six-year gearbox warranty including seals, for confidence in your purchase decision.
- Standard chain shielding for added safety and peace of mind.
- Retail financing available to qualified buyers.

**NOTE:** All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that standard chain shielding be used for extra protection.



## TRACTOR PTO HP RANGE: 45 - 200 HP

### Model

**BW10.50/BW15.50** | 15-foot flex-wing rotary cutter

The BW15.50 is ideal for cutting tall grasses and saplings up to 2 1/2 inches in diameter.



Here are just a few features exclusive to Woods that rotary cutter users like you told us were important in our 15-foot series.

- New patent-pending driveline lift assistance system makes it easy to hook up. Standard on all models.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greasable Quick-Change blade pins are easy to remove.



**Designed with input from users like you, the BW15.50, BW15.60, BW15.70, and their one-winged models, set a new industry standard for durability, reliability, performance and ease. We think you'll agree that it's the best Batwing ever.**

SPECIFICATIONS	
MODEL	BW10.50* / BW15.50
Tractor PTO HP	45-200
Cutting Height	2" - 15"
Cut Capacity (inches)	2.5" dia
Cutting Width (inches)	126" / 180"
Blade Tip Speed	15,000 fpm at 540 rpm 16,000 fpm at 1000 rpm
Weight	4,040 lbs / 4,340 lbs
Tongue Weight	1,200 lbs
Center Deck / Wing Deck	10 gauge
Side Skirt Thickness	1/4"
Side Skirt Depth	13"
Transport Width	96"
Stump Jumper	round
Flex	90° up / 22° down
Driveline Rating	CAT 6 CV main CAT 4 wing
Splitter Gearbox Rating	210 hp
Wings Gearbox Rating	200 hp
Output Shaft Size	2" dia
Gearbox Warranty	6 years
Options	<ul style="list-style-type: none"> <li>▪ double row chain shielding</li> <li>▪ dual wheels</li> <li>▪ LED lights</li> </ul>

\*Single-wing

**BW15.50**  
Shown with standard  
chain shielding



# WOODS

12-FOOT SERIES



## TRACTOR PTO HP RANGE: 55 - 275 HP

### Models

**BW10.60/BW15.60** | 15-foot flex-wing rotary cutter

The BW15.60 easily powers through tall brush and trees up to 4 inches in diameter.

## TRACTOR PTO HP RANGE: 65 - 300 HP

### Models

**BW10.70/BW15.70** | 15-foot flex-wing rotary cutter

The rugged BW15.70 can tame the harshest conditions – heavy brush and trees up to 4.5 inches in diameter. Ideal for professional and contract cutting.

### 1 | Sloped Deck

Smooth and sloped seven-gauge steel decks shed water and debris; deck design and baffling helps recut material, ensuring a finer shred and more even distribution

### 2 | Gearboxes

Massive, heavy-duty gearboxes with 3-inch output shaft deliver more cutting power and performance with a six-year limited warranty



### **BW15.60**

Shown with standard chain shielding

## The new customer-designed 15-foot Batwing

SPECIFICATIONS		
MODEL	BW10.60* / BW15.60	BW10.70* / BW15.70
Tractor PTO HP	55-275	65-300
Cutting Height	2" - 15"	
Cutting Capacity (inches)	4" dia	4.5" dia
Cutting Width (inches)	126" - 180"	
Blade Tip Speed	15,700 fpm at 540 rpm 16,000 fpm at 1000 rpm	
Weight	4,400 lbs / 4,600 lbs	5,290 lbs / 5,500 lbs
Tongue Weight	1,350 lbs	1,490 lbs
Center Deck / Wing Deck	7 gauge	1/4"
Side Skirt Thickness	1/4"	
Side Skirt Depth	13"	
Transport Width	96"	
Stump Jumper	round	
Flex	90° up / 22° down	
Driveline Rating	CAT 6 CV main CAT 4 wing	CAT 6 CV main CAT 5 wing
Splitter Gearbox Rating	275 hp	
Wings Gearbox Rating	225 hp	
Output Shaft Size	3" dia	
Gearbox Warranty	6 years	
Options	<ul style="list-style-type: none"> <li>▪ double row chain shielding</li> <li>▪ dual wheels</li> <li>▪ LED lights</li> <li>▪ shredding kit</li> <li>▪ deck ring</li> <li>▪ spring axle</li> <li>▪ full walking tandem axles</li> </ul>	

\*Single-wing

- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greaseable Quick-Change blade pins are easy to remove.

### Plus,

- Beefy, heavy-duty skid shoes prevent gouging and protect the deck.
- Strategically placed, welded baffles cut and distribute debris evenly.
- Center and wing decks feature high-strength 7 gauge steel (.60) or .26 inch thick steel (.70) for added durability.
- The side skirt is 13 inches deep and made of .25 inch thick steel for greater material capacity and the strength to manage it.
- For added toughness in extreme conditions, the .60 and .70 models have a 3-inch gearbox output shaft and optional deck ring.
- Other options include LED lights, double row chain shielding, dual wheels, and for the .60 and .70 models, a shredding kit for added versatility.

### 3 | Driveline

New patent-pending driveline lift assistance system makes it easy to hook up

### 4 | Skid Shoes

Bolt-on, heavy-duty skid shoes with an "approachable" leading edge reduce soil damage when turning

### BW15.70

Shown with standard chain shielding



**\*NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

# WOODS

## Batwing® Cutters

# THE BEST BATWING® YOU EVER DESIGNED.

BEST BATWING EVER




You told us what you wanted in a rotary cutter and we delivered. It's more reliable, more durable, easier to use, easier to maintain and built to perform better. A variety of Woods-exclusive features make it outstanding in its field.

“ I WANT A QUICK AND EASY TRACTOR HOOK-UP ”

Steve McCullough, Watseka, Illinois  
Third Generation Family-owned Dealership and  
Batwing® Designer

### EASY-TO-USE

- ① New patent-pending driveline lift assistance system makes it easy to hook up - and is standard on all models.



“ I WANT A MACHINE THAT WILL LAST ”

### DURABILITY

- ① Steel Tube Frame Absorbs Shock
- ② Integrated Chain Shielding Prevents Damage
- ③ Heavy-Duty Skid Shoes



## RELIABILITY

- 1 New, advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty - which includes the seals.

“ I WANT TO CUT MORE AND MAINTAIN LESS ”

Ben Faivre, Polo, Illinois  
Farmer and Batwing® Designer




## EASY MAINTENANCE

- 1 Industry Leading Smooth, Sloped Deck
- 2 Raised Components and Protected Hoses
- 3 Hinged, Easy-open Metal Shields
- 4 Easy-to-reach Grease Fittings
- 5 Greasable Quick-Change Blade Pins

“ I WANT TO GET RID OF DEBRIS COLLECTING ON THE DECK ”

Shawn Schaaf, Rock City, Illinois  
Rock Run Township Highway Commissioner  
and Batwing® Designer



“ KEEP THE GREAT CUT QUALITY AND HELP ME MOW CLOSER TO TREES AND POLES ”

## PERFORMANCE


- 1 Rounded Wings
- 2 Curved Leading Edge
- 3 Optional Shredding Kit Adds Two Blades
- 4 Calculated Positioning of Welded Baffles



# Batwing® Cutters

## 1 | Greasable Pivot Pins

Greasable pivot points are located on turnbuckle and axle arms to increase durability and reduce wear

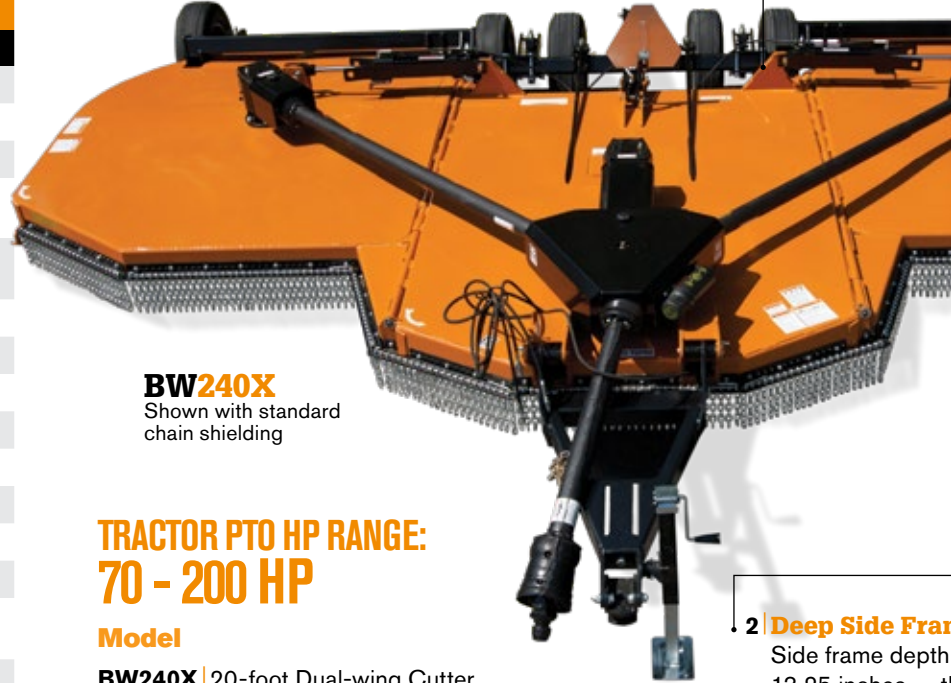

**BW240X**  
Shown with standard chain shielding

## TRACTOR PTO HP RANGE: 70 - 200 HP

### Model

**BW240X** | 20-foot Dual-wing Cutter

- Main driveline: Cat 6 CV
- Cuts brush up to 2 inches in diameter
- Walking tandem axle available

## 2 | Deep Side Frame

Side frame depth 13.25 inches — the deepest in the industry



## TRACTOR PTO HP RANGE: 70 - 300 HP

### Model

**BW240XHD** | 20-foot Dual-wing Cutter

- Maintain driveline: Cat 6 CV
- Cuts brush up to 3 inches in diameter
- Side frame depth of 13.25 inches — the deepest in the industry
- Optional shredding kit

SPECIFICATIONS		20-FOOT BATWING	
MODEL	BW240X	BW240XHD	
Tractor PTO HP	70-200 hp	70-300 hp	
Cutting Height	2" - 15"		
Cut Capacity (inches)	2"	3"	
Cutting Width (inches)	240"		
Blade Tip Speed	15,450 fpm at 540 rpm 16,300 fpm at 1000 rpm		
Weight	6,510 lbs	6,600 lbs	
Tongue Weight	1,950 lbs	1,980 lbs	
Center Deck / Wing Deck	10 gauge		
Side Skirt Thickness	1/4"		
Side Skirt Depth	13.25"		
Transport Width	123"		
Stump Jumper	Round		
Flex	90° up / 22° down		
Driveline Rating	CAT 6 CV main CAT 4 wing		
Splitter Gearbox Rating	250 hp		
Wings Gearbox Rating	120 hp	205 hp	
Output Shaft Size	2"	2.38"	
Gearbox Warranty	6 years		
Options	<ul style="list-style-type: none"> <li>▪ double row chain shielding</li> <li>▪ dual wheels</li> <li>▪ LED lights</li> <li>▪ full walking tandem axles</li> </ul>	<ul style="list-style-type: none"> <li>▪ double row chain shielding</li> <li>▪ dual wheels</li> <li>▪ LED lights</li> <li>▪ full walking tandem axles</li> <li>▪ shredding kit</li> </ul>	



## TRACTOR PTO HP RANGE: 70 - 300 HP

### Models

**BW1620X** | 13.5-foot Single-wing Cutter (162-inch cutting swath)

**BW2400X** | 20-foot Dual-wing Cutter (240-inch cutting swath)

- Main driveline: Cat 6 CV
- Deck plate has two layers of .135" plate
- Cuts brush up to 4 inches in diameter
- Side frame depth of 12.5 inches
- Optional dual tires available for wings
- Optional shredder kit or optional
- Optional blade ring
- Six-year gearbox limited warranty



### 3 | Quick-change Blade System

Woods' exclusive Quick-Change blade system allows for easy changing of blades from the top of the deck

SPECIFICATIONS		20-FOOT BATWING	
MODEL	BW1620X*	BW2400X	
Tractor PTO HP	70-300 hp		
Cutting Height	2" - 15"		
Cut Capacity (inches)	4"		
Cutting Width	162"	240"	
Blade Tip Speed	15,450 fpm at 540 rpm 16,300 fpm at 1000 rpm	15,450 fpm at 540 rpm 16,650 fpm at 1000 rpm	
Weight	8,500 lbs	7,740 lbs	
Tongue Weight	2,250 lbs	2,320 lbs	
Center Deck / Wing Deck	10 gauge double		
Side Skirt Thickness	1/4"		
Side Skirt Depth	13.25"	12.50"	
Transport Width	123"	100" / 123"	
Stump Jumper	Round		
Flex	90° up / 22° down		
Driveline Rating	CAT 6 CV main CAT 5 wing		
Splitter Gearbox Rating	250 hp		
Wing Gearbox Rating	210 hp		
Output Shaft Size	2.38"		
Gearbox Warranty	6 years		
Options	<ul style="list-style-type: none"> <li>▪ double row chain shielding</li> <li>▪ dual wheels</li> <li>▪ LED lights</li> <li>▪ full walking tandem axles</li> <li>▪ shredding kit</li> <li>▪ deck rings</li> </ul>	<ul style="list-style-type: none"> <li>▪ double row chain shielding</li> <li>▪ dual wheels</li> <li>▪ LED lights</li> <li>▪ full walking tandem axles</li> <li>▪ shredding kit</li> <li>▪ deck rings</li> </ul>	

\*Single-wing

### BW240XHD

Shown with standard chain shielding



**Features a double deck, built extra heavy to handle a host of rugged applications.**

**NOTE:** All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that chain shielding be used for extra protection.

**POWER TEAM** **Got ideas?**  
Join our customer panel at [woodsequipment.com/power](http://woodsequipment.com/power).  
**You have the power...**

**WOODS®** | A Blount International Brand  
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 [woodsequipment.com](http://woodsequipment.com)



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2018 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

