



MAX SERIES

- #1 Selling Tractor in the World
- 98% Customer Loyalty Rating
- 7-year Limited Powertrain Warranty



DEMING PRIZE
2003



JAPAN QUALITY MEDAL
2007

Mahindra
Tractors

VERSATILITY - Max Series

Industry-redefining eco-friendly Tier IV sub-compact and mid-compact models. The backbone of all Max series tractors is a full-length tractor frame that will allow users to install a backhoe at any time. The Max series have a wide range of attachments and implements, including a driver-over mowing deck, snow blowers, blades, brooms and feature the highest capacity loaders in the market.

Key Features:

- Max Versatility – Choose up to 15 implements to handle any task
- Max Maneuverability – Best in class turning radius to get work done in tight spaces
- Max Comfort – Easy turn seat for Tractor – Loader – Backhoe operation, easy on and off with an open platform.


Ideal For:

- Specialty / Hobby Farming
- Rural Lifestyle
- Equine

- Max Stability – Bigger tires, better traction, stability and safety for all jobs
- Max Lift Capacity – Lift more, carry more, pull more and get more done
- Max Engine Performance – 28% lower RPM results in smooth, quiet operation and less fuel consumption
- 7-year limited powertrain warranty*

- Home
- Grounds Maintenance / Municipal

*See Mahindra warranty and your dealer for details

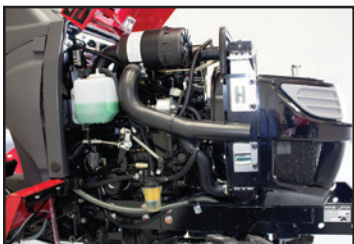

Engine - right side view



Dash panel



Mower

- Easy access to engine and maintenance items
- Lower rated engine rpm, means longer life, less noise, and better fuel efficiency
- Powerful and reliable Mitsubishi engine

- Clear view, easy-to-read instrument panel
- Brilliant backlighting
- Colorful warning lights that quickly inform the operator when service is required

- Drive over deck for easy installation and removal
- Excellent cutting quality
- Available mulch kit

EXCEPTIONAL PERFORMANCE. GREAT VALUE.



Engine - 3 cylinders, four-cycle, indirect-injection, water-cooled diesel

Transmission - HST - 2 ranges (MAX 24) or constant mesh and synchro mesh on F/R shuttle (both available on MAX 26XL)

Hydraulics - Open center, full-lift with position control

Operating Weight - 1,693 to 2,857 lbs. (varies by model) - sturdy, well-built, steel mid-compact chassis

Horsepower - 24.4 - 25.6 (depending on model)

Tires - Ag, industrial or turf

Loader - Lift up to 1,400 lbs. at 82.7" high with the MAX 26L front loader

Warranty - 7-year limited powertrain (See Mahindra warranty and your dealer for details)



Max 26XL Shuttle

Max 24 HST



AVAILABLE IMPLEMENTS


Mahindra offers a huge selection of implements to help you accomplish whatever task you wish to tackle and provide a complete Mahindra experience.

- Wide array of implements (186 variations)
- Competitive financing terms
- Standard-, Medium-, and Heavy-Duty implements to meet your needs
- Implements feature rugged construction with heavy-duty components
- 5-year rotary cutter gearbox limited warranty
- SNOW BLOWERS and SNOW REMOVAL equipment to meet cold-weather needs
- BEST VALUE in the market today



TRACTOR ATTACHMENTS

| TRACTOR | MAX 24 HST | MAX 26XL SHUTTLE | MAX 26XL HST | MAX 26XL HST Cab |
|---|------------|------------------|--------------|------------------|
| LOADER | MAX 24L | | MAX 26L | |
| Maximum Lift Height | 75" | | 82.7" | |
| Clearance with Attachment Dumped | 60" | | 67.3" | |
| Reach at Maximum Height | 23" | | 29" | |
| Maximum Dump Angle | 38° | | 32° | |
| Attachment Rollback Angle | 20° | | 24° | |
| Digging Depth Below Grade | 4" | | 2.6" | |
| Lift Capacity to Full Height @ Pivot Pins | 900 | | 1402 | |
| Breakout Force @ Pivot Pins | 2000 | | 2690 | |
| Rated Flow (Tractor System) | 4.6 gpm | | 4.6 gpm | |
| Attachment Width | 50" | | 48" | |
| Attachment Rated Capacity | 7 cu. ft. | | 7 cu. ft. | |
| Cycle Times @ rpm | 2500 | | 2600 | |
| Raise Boom (seconds) | 3.7 | | 3.3 | |
| Lower Boom (seconds) | 2.6 | | 2.4 | |
| Dump Attachment (seconds) | 3.4 | | 2.2 | |
| Retract Attachment (seconds) | 2.9 | | 2.6 | |
| Transport Weight (lbs.) | 545 | | 627.2 | |
| BACKHOE MODEL | | 26B | | N/A |
| TRANSPORT | | | | |
| Transport Height (maximum) | | 71" | | N/A |
| Transport Overhang | | 39" | | N/A |
| OPERATIONAL | | | | |
| Maximum Digging Depth | | 80" | | N/A |
| Digging Depth (2 Ft.) Flat Bottom | | 78.5" | | N/A |
| Overall Operating Height - Fully Raised | | 104.8" | | N/A |
| Loading Height (bucket at 60°) | | 65" | | N/A |
| Loading Reach (bucket at 60°) | | 40" | | N/A |
| Reach From Swing Post | | 102" | | N/A |
| Bucket Rotation | | 180° | | N/A |
| Swing Arc | | 150° | | N/A |
| Stabilizer Spread Operating Position | | 74" | | N/A |
| Stabilizer Down Below Grade | | 6" | | N/A |
| System Relief Valve Setting (psi) | | 2000 | | N/A |
| Digging Force - Bucket (lbs.) | | 2270 | | N/A |
| Digging Force - Dipper (lbs.) | | 1248 | | N/A |
| Transport Weight (lbs.) | | 710 | | N/A |



| TRACTOR | MAX 24 HST | MAX 26XL SHUTTLE | MAX 26XL HST | MAX 26XL HST Cab |
|--|--|--|----------------|------------------|
| ENGINE | | | | |
| Type | Four-stroke, indirect-injection water-cooled diesel | | | |
| Cylinders | 3 | | | |
| Engine HP (kW) @ rpm (EPA Certification) | 24.4 (18.2) @ 2500 (T4) | 25.6 (19.1) @ 2600 | | |
| Compression Ratio | 22:1 | | | |
| Displacement cubic inch ³ (cc) | 80.4 (1318) | | | |
| Fuel Tank Capacity | 6.1 gallons | | | |
| ELECTRICAL | | | | |
| Battery Capacity | 12 volt, 45 amp hours | | | |
| Alternator | 12 volt, 50 amp hours | | | |
| CLUTCH | | | | |
| Type | Single plate, dry | | | |
| TRANSMISSION | | | | |
| Type | HST - 2 ranges | Synchro mesh F/R shuttle and constant mesh on gear shift | HST - 2 ranges | |
| Number of Gears / Speeds | Infinite | 8F / 8R | Infinite | |
| STEERING | | | | |
| Type | Hydrostatic Power | | | |
| Pump Output (gallons per minute) | 2.7 | | | |
| BRAKES | | | | |
| Type | Wet disc | | | |
| HYDRAULIC SYSTEM | | | | |
| Type | Open center, full live hydraulic with position control | | | |
| Pump Output (gallons per minute) | 4.6 | 5.8 | | |
| 3-Point Linkage | Category 1, with check chains | | | |
| Lift Capacity (lbs.) | 1400 | 2205 | | |
| Rear Auxiliary Remote Valves | 1 spool optional | | | |
| PTO | | | | |
| Type | Live | Trans | Live | |
| PTO RPM (engine rpm) | 540 @ 2376 | | | |
| Mid PTO RPM (engine rpm)* | 2000 @ 2556 | 2000 @ 2526 | | |
| PTO HP (kW) | 19.5 (14.4) | 21.5 (16) | 20 (14.9) | |
| OPERATING WEIGHT | | | | |
| Total (lbs.) | 1693 | 1819 | 1863 | 2587 |
| DIMENSIONS with Ag Tires | | | | |
| Overall Length Inches (mm) | 104.1 (2645) | 109.3 (2775) | | |
| Overall Width Inches (mm) | 50.7 (1290) | 54.3 (1380) | | |
| Overall Height Inches (mm) [with Industrial Tires] | 81.5 (2070) | 84.3 (2140) | 82 (2082) | |
| Turning Radius Min. Feet (meters) | 7.2 (2.2) | 6.6 (2.0) | | |
| TIRES Sizes and Options | | | | |
| Ag (Front / Rear) | 6x12 / 9.5x16 | 7x12 / 9.5x16 | | |
| Industrial (Front / Rear) | 20x8-10 / 27x12.5-15 | 23x8.5-12 - 12x16.5 | | |
| Turf (Front / Rear) | 20x8-10 / 29x12.5-15 | 23x8.5-12 / 33x12.5-16.5 | | |

Specifications and design subject to change without notice.