



from 24 to 42 gal/min



Ø 8 in max



from 10 to 20 t

## FORESTRY MULCHER WITH FIXED TOOTH ROTOR

With its updated design the UML/HY has increased its strength and durability. The addition of the VT motor option has made the UML/HY VT one of the most productive units in its class. The hydraulic motor is internally positioned in the frame to protect it from dirt and potential damage, ensuring maximum reliability throughout the life of the attachment. **The VT version** with automatic variable displacement hydraulic motor increases productivity by up to 50% and simultaneously reduces fuel consumption.

### STANDARD EQUIPMENT


Enclosed machine body
Belt transmission
80/50cc variable torque hydraulic piston motor (UML/HY/VT) - (24 - 42 GPM)
Flow control system valve
Hydraulic hood
Welded counter blade
Dual row protection chains
Motor enclosed in the frame

Blank attachment plate

### OPTIONS

Customized setting hydraulic motor (UML/HY/VT)
Hood with mechanical adjustment
Diverter valve
Customized attachment bracket
Customized attachment bracket with fixed thumb
Multiple tooth options
Rotor Bite Limiter (UML/HY/VT)

## FEATURES

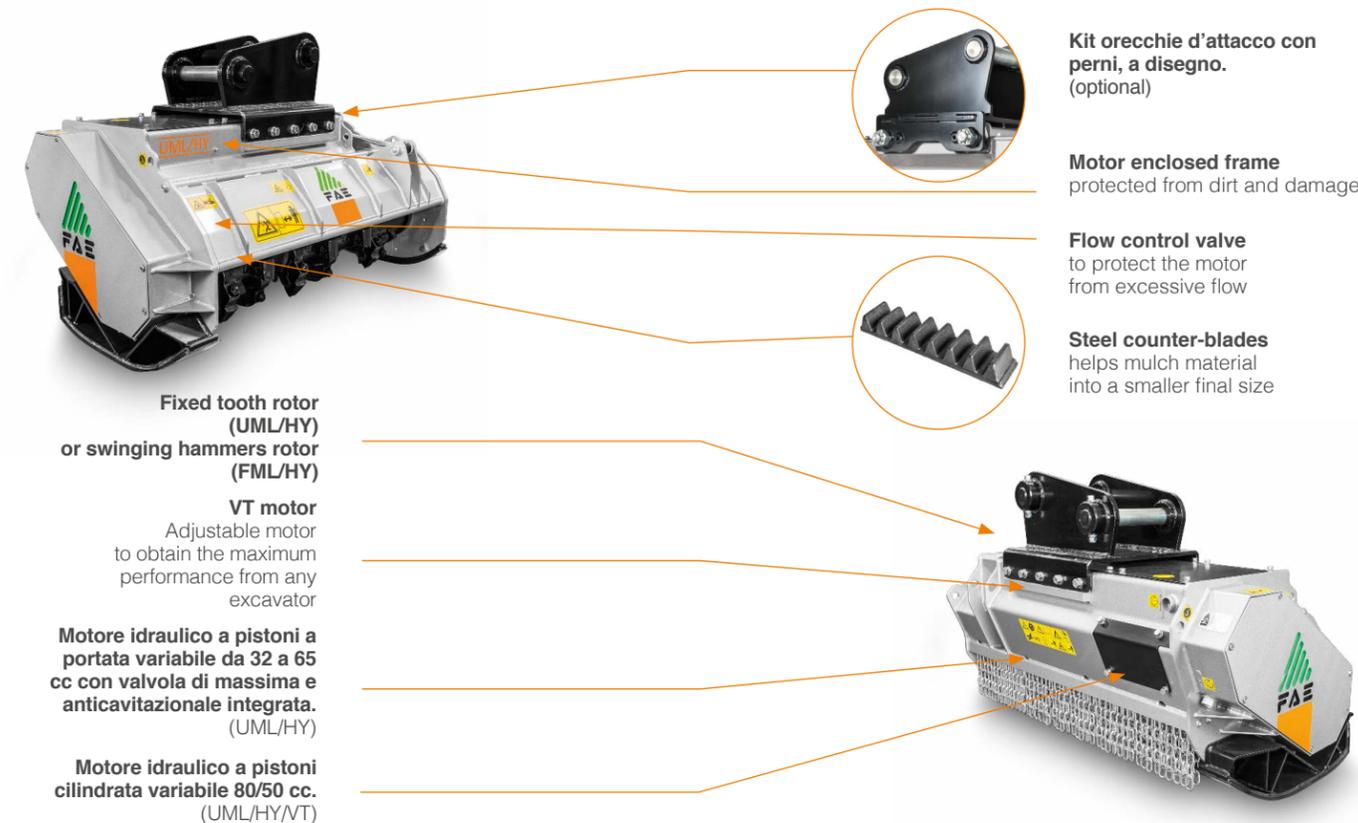

## MAIN OPTIONS



1

**Diverter valve**  
to control the opening and closing of the hydraulic door



2

**Customized attachment bracket with fixed thumb**

MODELLO	Flow rate (gal/min)		Pressure (PSI)		Excavator weight (t.)		Working width (in)	Weight (lbs)	Max shredding diameter (in)	No. teeth/hammers type	
	min	max	min	max	min	max				C/3+C/3/SS	I+C/3/SS
UML/HY/VT 100*	24	42	2600	5070	10	20	44	1920	6	20+2	28+2
UML/HY/VT 125*	24	42	2600	5070	10	20	53	2138	6	26+2	36+2
UML/HY/VT 150*	24	42	2600	5070	10	20	62	2359	6	32+2	42+2

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.  
\*Variable displacement hydraulic motor.