



AGRICULTURAL PRODUCTS

Implement Caddy



* SCIC1700 Shown with optional weight box

The **Implement Caddy** by MK Martin converts your 3PH implements to trailed versions when access to a 3PH equipped unit is not available. This alternative to conventional 3PH mounting allows greater flexibility over your work force.

Model	SCIC250	SCIC1700
Width	125"	152"
MAX HP	250	500
Weight (LBS.)	2,062	7,750
Lift Cyl.	3-1/2 x 16	5 x 14
Lift Capacity (LBS.)	12,000	20,000
Category	CAT. 2 & 3	CAT. 4
Tires	12.5L	16.5 x 16.1

Features

- 12,000 LBS. capacity
- 3PH Mount CAT. 2 or 3 implements
- Hydraulically raise and lower caddy to desired height


Optional Equipment

- Clevis Hitch
- Tank Mounts
- Weight Box
- 750 GAL. Tank
- Tie Down Strap Kit

Strip Cat



The Strip Cat is fully adjustable to your field conditions. Available in a 3PH or Trailed version the Strip Cat can be set up for either liquid or dry fertilizer application allowing an all in one tilling and fertilizing solution.

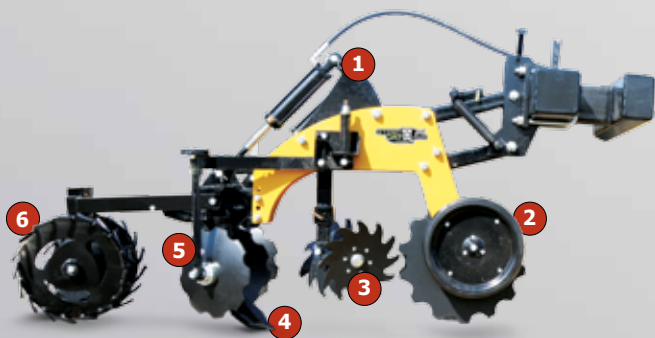

- 1** Hydraulic Reset
- 2** Row Depth Control & Residue Sizing
- 3** Sunco Trash Managers
- 4** Mole Knives
- 5** Berm Builders
- 6** Pack Wheels



Benefits

- Reduces field travel and compaction
- Improves fertilizer management
- Reduces soil erosion
- Increases germination

Features






- Standard 30" Spacing (Optional 22" Spacing on 18 row)
- Choose from 4-6-8-12-16 Row Units
- Independent row units with adjustable down pressure
- Dry lube bushings in joints
- Adjustable IRD Depth wheels
- 20" notched coulters (30% more cutting)
- Sunco Trash Managers to clean the tilled strip
- Independent spring loaded berm builders (height and angle adjustment)
- Dual wheel packers with adjustable down pressure
- All pull pin adjustments

STRIP CAT ROW UNIT ORDER

Main Unit SCBRU 	Slitter Coulter A SCSNC B SCSWC 	Trash Manager Set SCSTM 	Knife Point A SCSTPO B SCLDPO 
Floating Trash Manager Head ST-5011196 Blank if not required 	Fixed Knife Adaptor 22855 Not used with Hyd Tripper 	Knife Shank A SCKLSTS B SCKLSTL 	
Independent Berm Builder 1-SCNIBBD 2-SCNIBBC 	Packer/Berm Enhancer A SCBPT B SCBPW C SCBE 	Row Depth Gauge A SCIRD T B SCIRD L 	

STRIP CAT TOOLBAR

Hydraulic Knife

	SCHTA6R30 A 6-30 Row Hydraulic Knife Tripper
	SCHTA8R30 B 8-30 Row Hydraulic Knife Tripper
	SCHTA12R30 C 12-30 Row Hydraulic Knife Tripper
	SCHTA16R30 D 16-30 Row Hydraulic Knife Tripper
	SCHTA18R22 E 18-22 Row Hydraulic Knife Tripper

Gauge Wheel

	SCSGW A Standard Gauge Wheel Set
	SCPDGW B Pump-Drive Gauge Wheel Set
	SCLGW C Inside Gauge Wheel Winged Toolbar

Toolbar

	SCTB6R30 A 6 Row 30" c-c Toolbar
	SCTB8R30 B 8 Row 30" c-c Toolbar
	SCTBF12R30 12 Row 30" c-c Toolbar
	SCTBF16R30 16 Row 30" c-c Toolbar
	SCTBF18R22 18 Row 22" c-c Toolbar

Trailer Hitch

	SCTDF A Standard Trailer Hitch
	SCNTDF B Narrow Trailer Hitch



		6 Row (30" Rigid)	8 Row (30" Rigid)	12 Row (30" Folding)	16 Row (30" Folding)	18 Row (22" Folding)
SCTB6R30	6 row 30" tool bar	1	-	-	-	-
SCTB8R30	8 row 30" tool bar	-	1	-	-	-
SCTBSF12R30	12 row 30" Stack N Fold	-	-	1	-	-
SCTB12R30	12 row 30" tool bar	-	-	1	-	-
SCTBSF16R30	16 row 30" Stack N Fold	-	-	-	1	-
SCTB16R30	16 row 30" tool bar	-	-	-	1	-
SCTB28R22	18 row 22" tool bar	-	-	-	-	1
SCBRU	Generation II row unit	6	8	12	16	18
SCSNC	Notched Coulter	6	8	12	16	18
SCSWC	Wavy Coulter	6	8	12	16	18
SCSTM	Sunco Trash Manager	6	8	12	16	18
ST5011196	Floating Trash Manager mnt	6	8	12	16	18
SCIRDY	Depth Gauge Wheel (set)	6	8	12	16	18
SCIRDC	Coulter Depth Gauge Wheel	6	8	12	16	18
22855v	Fixed Knife Adaptor	6	8	12	16	18
SCNIBBD	Independent Berm Builder (cupped)	6	8	12	16	18
SCNIBBC	Independent Berm Builder (wavy)	6	8	12	16	18
SCBPT	Berm Packer (urethane)	6	8	12	16	18
SCBPW	Berm Packer (wire)	6	8	12	16	18
SCBE	Berm Enhancer	6	8	12	16	18
SCKLSTS	Knife Shank w/repl. Point (liquid)	6	8	12	16	18
SCKLSTL	Knife Shank w/repl. Point (liquid/dry)	6	8	12	16	18
SCHTA6R30	6 row 30" hydraulic tripper	1	-	-	-	-
SCHTA8R30	8 row 30" hydraulic tripper	-	1	-	-	-
SCHTASF12R30	12 row 30" hydraulic tripper (For Stack N Fold)	-	-	1	-	-
SCHTA12R30	12 row 30" hydraulic tripper	-	-	1	-	-
SCHTASF16R30	16 row 30" hydraulic tripper (For Stack N Fold)	-	-	-	1	-
SCHTA16R30	16 row 30" hydraulic tripper	-	-	-	1	-
SCHTA18R22	18 row 22" hydraulic tripper	-	-	-	-	1
SCSGW	Standard Gauge Wheel (set)	1	1	1	1	1
SCPDGW	Pump Drive Gauge Wheel (set)	1	1	1	1	1
SCTDF	Trailer Hitch	1	1	1	1	1
SCSTPO	Replacement knife point (mini Mole)(Parts)	6	8	12	16	18
SCLDPO	Replacement knife point (low draft)(Parts)	6	8	12	16	18

Strip Cat



** Stack and Fold Toolbar shown on SCIC1700 with optional weight box and 12 Row Strip Cat*

The Stack N Fold Toolbar from MK Martin is designed to provide safe and easy transport of Strip Cat strip till systems. By stacking both end sections over the center section, the Stack N Fold Toolbar quickly reduces the overall width providing easier transport from field to field. The over centre design and locking pins ensure that the end sections remain securely in place during travel and when in storage.





** Stack and Fold Toolbar shown on SCIC1700 with optional weight box and 12 Row Strip Cat*

Stack N Fold Toolbars can be configured with 2 to 4 remotes allowing you to control each side of the toolbar separately. This allows for easier service and maintenance, as well as for custom operations when you may not need the full width of the Strip Cat such as on headlands and point rows.

Features

- Available from 8-Row to 18-Row
- Allows for parallel horizontal stacking of row units
- Ideal for transport and storage
- Equipped with 2 large cylinders (5x30 fold cyl.)
- Equipped with 2 small cylinders (2x4)
- Requires 2 to 4 remotes depending on configuration

Gravity Bins



Standard Features

- Viewing Windows
- Road Lights
- Front Ladder
- Unloading Door includes metering door

Model	MK 2750			MK 4000	
Extension	N/A	8"	12"	N/A	8"
Capacity (Bushels)	270	315	340	400	465
Unloading Door	35" width			45" width	
Chute Height	16"-20"			17"-20"	
Hopper Construction	14 GA.			12 GA.	
Under Structure	3" x 6" .25" wall rectangular tubing			3" x 6" .25" wall rectangular tubing	
Box Dimensions					
Length	144"	144"	144"	175"	175"
Width	88"	88"	88"	101"	101"
Height (less wagon)	80"	88"	92"	84"	92"
Height (wagon & 22.5" wheel)	104"	112"	114"	116"	124"
Wheel Base	98"			120"	



Optional Equipment

- Horst Running Gear
- Center Dump Deflector
- Standard Tarp Kit with Ratchet Tie Down
- Shur Lok Style Tarp Kit

MK 5000			MK 6500	
N/A	8"	12"	N/A	8"
500	575	610	645	745
	45" width		57" width	
	17"-21"		16"-20"	
	12 GA.		12 GA.	
	4" x 8"		4" x 8"	
	.25" wall rectangular tubing		.25" wall rectangular tubing	
196"	196"	196"	229"	229"
102"	102"	102"	115"	115"
89"	98"	101"	91"	99"
123"	131"	135"	125"	133"
	142"		156"	

Grain Carts



New from your trusted harvest partner comes a new line of grain carts. Available in either 650 or 850 bushel models the grain carts are ready to take the field when you are.

The hydraulic front folding auger design increases operator visibility, provides more reach, and requires less repositioning during the unloading process. The chute is equipped with a hydraulic hood to better control the placement of your grain.

All sides of the hopper angle toward the augers sump ensuring virtually all grain is picked up and transferred through the auger. A clean out hatch is provided to ensure 100% of the grain is reclaimed from the grain cart.

- Optional MK850 Tarp





Model	MK 650	MK 850
Capacity (Bushels)	650	850
Unload Time (Approx.)	2 mins	2 mins
Auger (One Vertical)	16"	18"
Wheels	27 x 32	27 x 32
Hubs	10 Bolt	10 Bolt
Spindles	5" diam.	5" diam.
Weight (Approx.) (LBS.)	7,050	9,200
PTO (RPM)	1,000	1,000
Tire Size (Ply)	800/65 R32	30.5 x 32 (12)
Tongue Weight (Empty) (LBS.)	1,000	1,000
Tongue Weight (Loaded) (LBS.)	3,400	3,400
Hopper Material	12 GA. Steel	12 GA. Steel
Undercarriage (Construction)	8" x 4" x 1/4" Tubing	8" x 4" x 5/16" Tubing
Axle	5" x 5" x 1/2" Tubing	5" x 5" x 1/2" Tubing

Notes:

- Specifications are subject to change without notice or obligation.
- Bushel capacities measured with #2 corn at 15% moisture (56 lb test wt.).
- Unload time varies with rpm and moisture content of grain.

Grader Blades



Model shown with optional wheel kit.

Extreme Duty Grader Blade For 100-150 HP Tractors.

The Extreme Duty Grader Blade from MK Martin mounts to your tractors 3-point hitch. Powered by your tractors hydraulics the XD series blade has hydraulic cylinders to adjust the offset of the arm, the blade angle, and the tilt of the blade. An additional hydraulic cylinder on the optional wheel kit helps to control the depth.

The Extreme Duty grader blade is available in 8', 9' and 10' models for tractors with a rated horsepower of 100 and 150 HP.

Available options include dual gauge wheel kit with hydraulic cylinder.

- Hydraulic Angle
- Hydraulic Tilt
- Hydraulic Offset





Model	8XD-100	9XD-100	9XD-150	10XD-150
Horse Power (Max.)	100	100	150	150
3PH Mount	CAT. 2 & 3			
Mouldboard Thickness	5/16"			
Mouldboard Width	96"	108"	108"	120"
Mouldboard Height	20"			
Offset Adjustment	27" left or right (hydraulic)			
Adjustment Angle	32° left or right (hydraulic)			
Adjustment Tilt	13° blade adjustment (hydraulic)			
King Pin	3-1/2"	3-1/2"	4"	4"
Cutting Edge	High Carbon 1/2" x 6" (reversible)			
Weight (LBS.)	1526	1619	1796	1850

Land Levelers



These rugged scrapers come in a range of sizes from 8 to 12 feet to fit your needs and your equipment. Standard on all models is our 1/2 inch thick reversible hardened cutting edge, ready to smooth out the bumps and fill in the hollows. Cutting depth is controlled by a 3"x8" hydraulic cylinder so you can decide how much of a bite to take and adjust on the go. All models are well suited for feedlot and soil reclamation or swale cutting.






Features

- Rigid and tilt models in all widths
- 1/2" x 6" reversible hardened cutting edge
- Equipped with a 10" jack or 15" available on request
- All models have 3" x 8" hydraulic lift cylinder
- Tilt models use 3" x 6" cylinder to tilt 10° each way

Model	Width	Tilt	Weight (LBS.)
LLR-8	8'	-	1,290
LLT-8	8'	TILT	1,332
LLR-10	10'	-	1,460
LLT-10	10'	TILT	1,660
LLR-12	12'	-	1,630
LLT-12	12'	TILT	1,830

Bale Handler

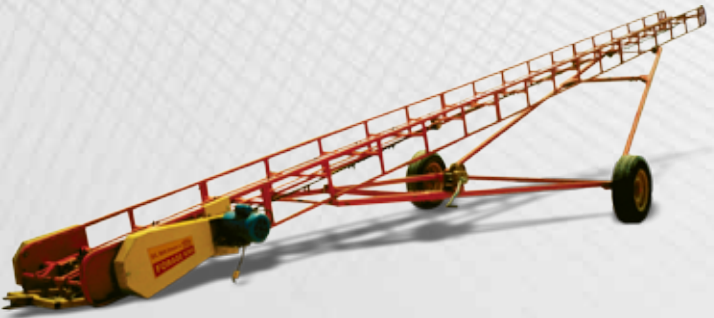


The **Forage King Bale Handler** is constructed of 1x1x100w tubing giving it unmatched strength in its class. 1 sealed bearings on all shafts make it a low maintenance piece of equipment to care for. The undercarriage is constructed of 2x2x125w tubing with 2500 LBS. spindles on the axes.

Elevators over 46' in length must be ordered with a cable truss kit. All undercarriage kits come with the required chain side lifters.


Features

- 1" shafts that turn on sealed ball bearings
- 7-tooth cast sprockets on keyways
- No. 55 detachable link carrier chain
- Heavy, durable 1" square tubing overall
- Comes in sections so system bolts together in any configuration as required


Model	Description	Length
MTS	Undercarriage for Elevators	26' - 35'
MTL	Undercarriage for Elevators	36' - 46'
MTLX	Undercarriage for Elevators	46' - 55'
MTK	Truss Kit for Elevators	over 46'




MB4 Basic Drive



MD4 Diverter Section



MMD Movable Diverter




MB4G Gearbox Basic Drive




MTD Transfer Drive



MMH Mow Hangers




Center Sections



MBC Bale Chute

Model

MC2 MC4 MC8 MC10



MSL Slide Chain Lifter