

2019 BACKCOUNTRY™

PACKAGE HIGHLIGHTS

- REV® Gen4 platform with narrow-design bodywork
- Rotax® 850 E-TEC® and 600R E-TEC® engines
- pDrive™ clutch with clickers
- cMotion™ rear suspension
- RAS™ 3 front suspension
- 15 x 146 x 1.6 in. Cobra track
- Brembo brake with braided stainless-steel brake line
- RER™ electronic reverse
- Adjustable ski stance
- RF D.E.S.S.™ key
- Standard electric start
- Performance trail seat
- Warm glove box with 4 L / 1 US gal of storage
- Open toe-hold
- Handlebar controls



BACKCOUNTRY™ 850 E-TEC® shown

ROTAX® ENGINE

	850 E-TEC®	600R E-TEC®
Engine details	Liquid-cooled, eRAVE™	Liquid-cooled, eRAVE™
Cylinders	2	2
Displacement	849 cc / 51.9 in. ³	599.4 cc / 36.6 in. ³
Bore	82 mm / 3.2 in.	72.3 mm / 2.85 in.
Stroke	80.4 mm / 3.2 in.	73 mm / 2.87 in.
Maximum engine speed	7,900 RPM	8,100 RPM
Carburation	E-TEC direct injection with additional booster injectors	E-TEC direct injection
Recommended fuel type	Premium unleaded	Premium unleaded
Minimum octane	91	91
Fuel tank	36 L / 9.5 US gal	36 L / 9.5 US gal
Oil tank capacity	3.4 L / 3.6 qt	3.4 L / 3.6 qt

POWERTRAIN

	pDrive™ with clickers	pDrive™ with clickers
Drive clutch type	QRS	QRS
Driven clutch type	QRS	QRS
Engagement	3,800 RPM	3,400 RPM
Small sprocket number of teeth	21	23
Large sprocket number of teeth	45	51
Drive sprocket number of teeth	8	8
Drive sprocket diameter	183 mm / 7.2 in.	183 mm / 7.2 in.
Brake system	Brembo brake with stainless-steel braided brake line	Brembo brake with stainless-steel braided brake line

DRY WEIGHT

217 kg / 478 lb 214 kg / 471 lb

COLOR

White / Black

Black

DIMENSIONS

Vehicle overall length	3,110 mm / 122.4 in.
Vehicle overall width	1,140 to 1,180 mm / 44.9 to 46.5 in.
Vehicle overall height	1,347 mm / 53 in.
Ski stance	975 or 1,020 mm / 38.4 or 40.2 in.
Ski overall length	1,049 mm / 41.3 in.
Track nominal width	381 mm / 15 in.
Track nominal length	3,705 mm / 146 in.
Track profile height	40.6 mm / 1.6 in. Cobra

SUSPENSION

Front suspension	RAS™ 3
Front shock	HPG™ Plus
Front suspension max. travel	220 mm / 8.7 in.
Rear suspension	cMotion™
Center shock	HPG™
Rear shock	HPG™
Rear suspension max. travel	239 mm / 9.4 in.

FEATURES

Frame	REV® Gen4	Riser block height	120 mm / 4.7 in.	Mirrors	Optional
Bodywork	Narrow design	Starter	Electric	Windshield	430 mm / 17 in.
Skis	Pilot™ DS 2	Reverse	RER™	Runner	Square 3/8
Seating	Trail performance	Heated throttle lever/ grips	Standard	Carbide configuration	102 mm / 4 in. at 90°
Handlebar	U-shaped aluminum with J-hooks / Grab handle	Gauge	Analog with display	Hitch	Optional



BACKCOUNTRY™ 600R E-TEC® shown



BACKCOUNTRY™ 850 E-TEC® shown

FEATURE HIGHLIGHTS



cMotion™ rear suspension

Crossover-specific suspension uses best principles of the rMotion™ trail and tMotion™ mountain skids for confident cornering and agile boondocking.



Rotax® 850 E-TEC® engine

Next generation of the most advanced direct-injection two-stroke engine technology. Designed for reliability and durability with proven 4-stroke and long-lasting automotive technologies.




Rotax® 600R E-TEC® engine

The Rotax 600R E-TEC® engine with second generation E-TEC® technology offers immediate throttle response, crisp acceleration while continuing to set the bar for reliability, and 2-stroke oil and fuel economy.



pDrive™ clutch

Fast and friction-free dual rollers transfer torque in place of traditional sliding buttons. Ultra-responsive shifting, impressive RPM consistency and lightweight.

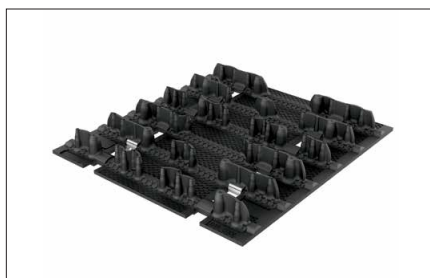

Cobra 15 x 146 x 1.6 in. track

This track features combination of flexible cupped lugs for superior off-trail performance and more rigid lugs for added traction on hard-packed snow.

GAUGE FEATURES

Speedometer	Standard
Tachometer	Standard
Fuel	Standard
Engine temperature	Optional