

Agricultural Products





Standard Features

- Viewing Windows
- LED Road Lights
- Front Ladder
- Unloading Door includes metering door
- Solid Welded Box Interior

Model	MK 3200		
Extension	N/A	8"	19"
Capacity (Bushels)	320	375	450
Hopper Construction	14 GA.		
Under Structure	3" x 6" x .188 wall rectangular tube		
Unloading Door	45" width		
Chute Height	17"-20"		
Box Dimensions			
Length	158"	158"	158"
Width	96"	96"	96"
Height (less wagon)	78"	86"	98"
Height (wagon & 22.5" wheel)	102"	110"	122"
Wheel Base	112"		

Gravity Box



Optional Equipment

- Horst Running Gear
- Center Dump Deflector
- Divider Kit
- Grain Shield Tarp Kit
- Hydraulic Door Opener
- Rear Ladder Kit



MK 5000			MK 6500		
N/A	8"	12"	N/A	8"	12"
500	570	605	645	745	800
12 GA.			12 GA.		
4" x 8"			4" x 8"		
.188" wall rectangular tubing			.188" wall rectangular tubing		
57" width (standard) 28" width x2 (divider)			57" width (standard) 28" width x2 (divider)		
17"-21"			16"-20"		
196"	196"	196"	229"	229"	229"
101"	101"	101"	115"	115"	115"
89"	98"	101"	91"	99"	103"
123"	131"	135"	125"	133"	137"
142"			156"		



1200 Gravity Box



Model	MKGW12000
Extension	N/A
Capacity (Bushels)	1,200
Hopper Construction	12 GA.
Under Structure	4x8x.25w
Unloading Door	15" length x 47" width X 2
Chute Height	18"
Box Dimensions	
Length	315"
Width	110"
Height (less wagon)	136"
Height (wagon & 22.5" wheel)	156"
Wheel Base	215"



Stack N Fold Toolbar



The Stack N Fold Toolbar from MK Martin is designed to provide safe and easy transport of Strip Cat strip till systems. By stacking both end sections over the center section, the Stack N Fold Toolbar quickly reduces the overall width providing easier transport from field to field. The over centre design and locking pins ensure that the end sections remain securely in place during travel and when in storage.

Stack N Fold Toolbars can be configured with 2 to 4 remotes allowing you to control each side of the toolbar separately. This allows for easier service and maintenance, as well as for custom operations when you may not need the full width of the Strip Cat, such as on headlands and point rows.



Features

- Available from 8-Row to 18-Row
- Allows for parallel horizontal stacking of row units
- Ideal for transport and storage
- Equipped with 2 large cylinders (5x30 fold cyl.)
- Equipped with 2 small cylinders (2x4)
- Requires 2 to 4 remotes depending on configuration



Disc Mower Implement Caddy



The MK Disc Mower Implement Caddy transforms your 3PH disc mower into a pull-type unit to help reduce wear on the mower while reducing stress from your tractor. Using the adjustable top link, you can connect your disc mower faster and easier than before. With the addition of the adjustable hitch, you can level your caddy and mower for an even cut as you drive along.

The MK Disc Mower Implement Caddy comes in two models: inline (C1201) and offset (C1200).

Model	MKC1200	MKC1201
Weight (LBS.)	1,900	1,835
Max Implement Weight	1,400 lbs.	1,400 lbs.
Lift Cyl.	3x8	3x8
Tires	11L 15	11L 15
Main Frame	7x7 Tube	7x7 Tube
RPM	540	540
Driveline	#5	#5

Features

Adjustable Hitch



Hydraulic (Option)



Implement Caddy



The Implement Caddy by MK Martin converts your 3PH implements to trailed versions when access to a 3PH equipped unit is not available. Hydraulically raise and lower caddy to desired height. This alternative to conventional 3PH mounting allows greater flexibility over your work force.

Model	SCIC250	SCIC1700
Width	125"	152"
MAX HP	250	500
Weight (LBS.)	3,560**	7,750
Lift Cyl.	3-1/2 x 16	5 x 14
Lift Capacity (LBS.)	12,000	20,000
Category	CAT. 2 & 3	CAT. 4
Tires	12.5L	16.5 x 16.1

***Includes the weight of the weight box*





The Strip Cat is fully adjustable to your field conditions. Available in a 3PH or Trailed version the Strip Cat can be set up for either liquid or dry fertilizer application allowing an all in one tilling and fertilizing solution.


Benefits

- Reduces field travel and compaction
- Improves fertilizer management
- Reduces soil erosion
- Increases germination

Features

- Choose from 4-6-8-12-16 Row Units
- Standard 30" Spacing (Optional 22" Spacing)
- Independent row units with adjustable down pressure
- Dry lube bushings in joints
- Adjustable IRD Depth wheels
- 20" notched coulters (30% more cutting)
- Sunco Trash Managers to clean the tilled strip
- Independent spring loaded berm builders (height and angle adjustment)
- Dual wheel packers with adjustable down pressure
- All pull pin adjustments

Strip Cat

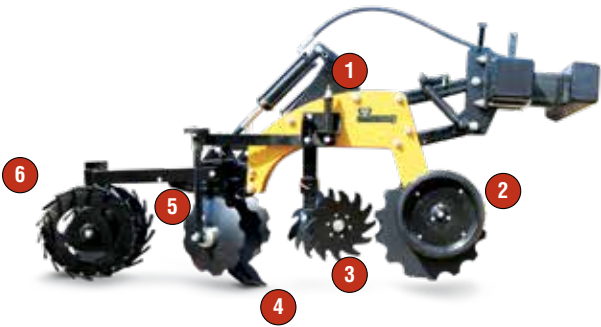





- 1 Hydraulic Reset
- 2 Row Depth Control & Residue Sizing
- 3 Sunco Trash Managers
- 4 Mole Knives
- 5 Berm Builders
- 6 Pack Wheels



STRIP CAT ROW UNIT ORDER

MAIN UNIT  SCBRU	TRASH MANAGER SET  SCSTM	SLITTER COULTER  A SCSNC B SCSWC	KNIFE POINT  A SCSTPO B SCLDPO
FIXED KNIFE ADAPTER  NOT USED WITH HYDTRIPPER 22855	KNIFE SHANK  A SCKLSTS B SCKLSTL	PACKER/BERM ENHANCER  A SCBPT B SCBPW C SCBE	
INDEPENDENT BERM BUILDER  1 SCNIBBD 2 SCNIBBC		ROW DEPTH GAUGE  A SCIRD T B SCIRD L	FLOATING TRASH MANAGER HEAD  BLANK IF NOT REQ. ST-5011196

STRIP CAT TOOL BAR

C-C TOOL BAR  SIX ROW (30") A SCTB6R30 16 ROW (30") SCTBF16R30 8 ROW (30") SCTB8R30 18 ROW (22") SCTBF18R22 12 ROW (30") SCTBF12R30		HYDRAULIC KNIFE TRIPPER  6-30 SCHTA6R30 8-30 SCHTA8R30 12-30 SCHTA12R30 16-30 SCHTA16R30 18-22 SCHTA18R22	
TRAILER HITCH STANDARD TRAILER HITCH A SCTDF NARROW TRAILER HITCH B SCNTDF 			
GAUGE WHEEL  STD. GAUGE WHEEL SET A SCSGW PUMP-DRIVE GAUGE WHEEL SET B SCPDGW INSIDE GAUGE WHEEL WINGED TOOLBAR C SCLGW			

Model	Description	6 Row (30" Rigid)	8 Row (30" Rigid)	12 Row (30" Folding)	16 Row (30" Folding)	18 Row (22" Folding)
SCTB6R30	6 row 30" tool bar	1	-	-	-	-
SCTB8R30	8 row 30" tool bar	-	1	-	-	-
SCTBSF12R30	12 row 30" Stack N Fold	-	-	1	-	-
SCTB12R30	12 row 30" tool bar	-	-	1	-	-
SCTBSF16R30	16 row 30" Stack N Fold	-	-	-	1	-
SCTB16R30	16 row 30" tool bar	-	-	-	1	-
SCTB28R22	18 row 22" tool bar	-	-	-	-	1
SCBRU	Generation II row unit	6	8	12	16	18
SCSNC	Notched Coulter	6	8	12	16	18
SCSWC	Wavy Coulter	6	8	12	16	18
SCSTM	Sunco Trash Manager	6	8	12	16	18
ST5011196	Floating Trash Manager mnt	3	4	6	8	9
SCIRDT	Depth Gauge Wheel (set)	6	8	12	16	18
SCIRDC	Coulter Depth Gauge Wheel	6	8	12	16	18
22855	Fixed Knife Adaptor	6	8	12	16	18
SCNIBBD	Independent Berm Builder (cupped)	6	8	12	16	18
SCNIBBC	Independent Berm Builder (wavy)	6	8	12	16	18
SCBPT	Berm Packer (urethane)	6	8	12	16	18
SCBPW	Berm Packer (wire)	6	8	12	16	18
SCBE	Berm Enhancer	6	8	12	16	18
SKLSTS	Knife Shank w/repl. Standard Point (liquid)	6	8	12	16	18
SKDDTL	Knife Shank w/repl. Low Draft Point (liquid/dry)	6	8	12	16	18
SCCK10	10 degree knife coulter	6	8	12	16	18
SCCK15	15 degree knife coulter	6	8	12	16	18
SCHTA6R30	6 row 30" hydraulic tripper	1	-	-	-	-
SCHTA8R30	8 row 30" hydraulic tripper	-	1	-	-	-
SCHTASF12R30	12 row 30" hydraulic tripper (For Stack N Fold)	-	-	1	-	-
SCHTA12R30	12 row 30" hydraulic tripper	-	-	1	-	-
SCHTASF16R30	16 row 30" hydraulic tripper (For Stack N Fold)	-	-	-	1	-
SCHTA16R30	16 row 30" hydraulic tripper	-	-	-	1	-
SCHTA18R22	18 row 22" hydraulic tripper	-	-	-	-	1
SCSGW	Standard Gauge Wheel (set)	1	1	1	1	1
SCPDGW	Pump Drive Gauge Wheel (set)	1	1	1	1	1
SCTDF	Trailer Hitch	1	1	1	1	1
SCSTPO	Replacement knife point (mini Mole)(Parts)	6	8	12	16	18
SCLDPO	Replacement knife point (low draft)(Parts)	6	8	12	16	18



Inter Seeder rolling tines create some soil disturbance, improving the seed to soil contact. This improves the germination compared to seeds that are just broadcasted.

Model	11 Row	15 Row
Width	27.5"	37.5"
Weight (LBS.)	N/A	N/A
Category	CAT II & III	CAT II & III

Features

- Gandy 10 cubic feet Orbit Air seed applicator
- Multiple species seed capability
- 11 row 27 ½' width
- 15 row 37 ½' width
- Category II and III w/quick hitch compatibility
- Independent row units
- 30" row width
- Parking stands