



15'-25' HEAVY-DUTY 3-POINT

10HD Series Drills are available in 15', 20', and 25' widths and in two meter styles: fluted or precision. "Fluted" models feature reliable fluted-feed meters. These combine 1¾" cups and a 4-speed transmission to effectively meter almost any

seed. "Precision" models are offered with Singulator Plus™ meters that singulate many seed types, including soybeans, sorghum, cotton, and even ultra low-rate rice. Multiple row-spacing options further tailor these drills to farmer needs.



15'-25' HEAVY-DUTY 3-POINT MODELS

15'-25' Heavy-Duty 3-Point Drills	Working Width	Transport Width	Transport Height	Engine H.P. Required	Row Spacing	Weight
1510HDF	15' 1"	15' 11"	N.A.	110+	7.5", 10"	4,200 - 4,950
2010HDF	20'	21'	N.A.	250+	7.5", 10"	5,860 - 6,820
2510HDF	24' 2" - 25'	25' 2"	N.A.	275+	7.5", 10", 15", 30"	6,180 - 8,680
1510HDP	15'	15' 11"	N.A.	110+	7.5", 10", 15", TR30"	3,730 - 5,530
2010HDP	20'	21'	N.A.	250+	7.5", 10", 15", TR30"	5,290 - 7,620
2510HDP	25' 2"	26' 3"	N.A.	275+	7.5", 10", 15", TR30"	7,190 - 9,370

See www.greatplainsag.com for complete specifications.

ADDITIONAL STANDARD FEATURES


- Press wheel options include 3"x13" center rib; 3"x13" double rib*; 1"x12" double-V; or 1.25"x13" double-wedge
- 9.5L x 15 gauge wheel tires (15' only)
- 11L x 15 dual gauge wheel tires (20' and 25' models)
- Slotted clevis gauge wheel turnbuckle
- Protected gauge wheel drive chain
- Cat. 2, 3, and 3N hitch
- 2.4 bu./ft. seed box capacity
- Lift-assist cylinder on box lid
- Seed level indicator
- 17½"-wide folding walkboard
- Ladder bundle
- Meter cleanout and shutoff (HDP models)
- Tapered roller gauge wheel bearings
- Hex drive shafts
- Cast blade separator
- Acremeter
- Dual gauge wheel (20' only)
- Two heavy-duty down-pressure springs
- LED safety lighting

*only available by ordering through Parts

OPTIONS (see website for complete list of features & options)




SMALL SEEDS BOX ATTACHMENT

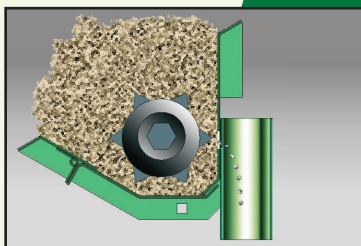

FERTILIZER ATTACHMENT



ROW MARKERS

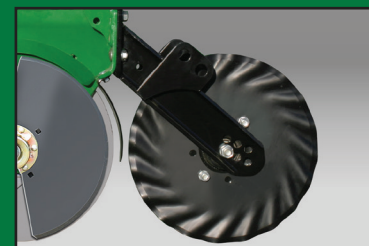

UNIT-MOUNTED COULTERS



15' Models

1510HDF, 1510HDP

20' Models

2010HDF, 2010HDP



25' Models


2510HDF, 2510HDP

FEATURES & BENEFITS




10 SERIES OPENER

The 10HD Series is truly a heavy-duty opener with 15" opener blades and a ½" lead to penetrate easier. A full-length seed tube and trailing flap ensure the seed is "dead dropped" in the bottom of the trench. Depth is easy to set with an 18-position T-handle. Parallel linkage keeps the openers level throughout their ten inches of travel, and multiple press wheel options are available to increase the efficiency of these drills in many soil types. These openers are designed with a lock-up feature for varying row spacing.



FLUTED FEED (HDF MODELS)

Exclusive Great Plains fluted feed cups deliver outstanding accuracy for a large variety of seed shapes and sizes, and maintain precise delivery in either fast or slow drilling conditions.



PRECISION METER (HDP MODELS)

For even more accuracy, the Singulator Plus™ meter evenly spaces seeds in the row and allows the operator to plant by population similar to a planter. Precision models come with a choice of seed meter wheels.




GAUGE WHEEL OPTIONS

Equip the drill with either heavy-duty single or dual gauge wheels.



LADDER FRAMES

Fully welded, ladder-style frames give these 3-point drills added strength and durability.



V-BOTTOM DIVIDERS

Dividers help distribute all the seed to the seed cups.