



NATIVE GRASS DRILLS

Min-Till Native Grass Drills from Great Plains are the perfect fit for farmers and contractors who need to seed native grasses over a large number of acres. 3-point configurations are offered in 12' or 15' working widths; 2-section, folding

models are available in 24' and 30' working widths. All feature Series II picker-wheel meters and native grass agitators. The 1 bu./ft. native grass box effectively meters everything from fluffy native grass mixes to denser seeds, such as brome.



www.GreatPlainsAg.com

NATIVE GRASS MODELS

Native Grass Drills	Working Width	Transport Width	Transport Height	Engine H.P. Required	Row Spacing	Weight
3PNG12	11' 6"-11' 9"	12'	N/A	85+	7.5", 10'	2,395 - 4,313
3PNG15	15'	15'	N/A	110+	7.5", 10'	3,243 - 5,510
2SNG24	24' 9"	14'	7' 7"	125+	7.5", 10'	7,500 - 8,200
2SNG30	30' 6"	14'	7' 7"	140+	7.5", 10'	8,300 - 8,800

See www.greatplainsag.com for complete specifications.

CAPABLE
3 BOX 3 SEED 3 RATE
3 3 3



ADDITIONAL STANDARD FEATURES

- 2 bu./ft. main seed box capacity
- 1 bu./ft. native seed box capacity
- Acremeter
- 00 Series II Native Grass Opener
- Cat. 2, 3, and 3N hitch
- 9.5L x 15 gauge wheel tires
- Slotted clevis gauge wheel turnbuckle
- Gauge wheel brake
- Seed box sight glass
- Walkboard w/ step
- Calibration crank
- LED safety lighting

*only available by ordering through Parts

OPTIONS (see website for complete list of features & options)




SMALL SEEDS BOX



FLAT-FOLD MARKER



PRESS WHEEL SCRAPERS



SEED PLUGS



PULL PACKAGE

3-Point Models

3PNG12, 3PNG15




2-Section Models

2SNG24, 2SNG30



FEATURES & BENEFITS

SERIES II NATIVE GRASS DRIVE

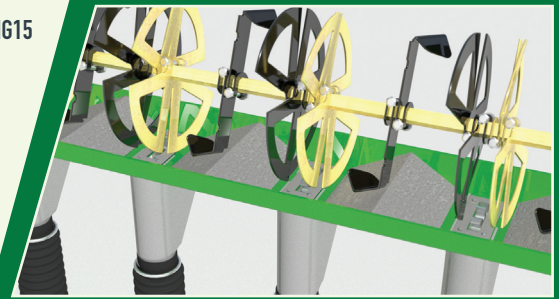

This system provides higher seeding rates and more aggressive native grass feeding than other boxes. It meters even the fluffiest native grass seed by continually moving the seed with the agitator (above) and by pulling it down out of the seed box and into the native grass seed tube with the aggressive picker wheel (right).




NATIVE GRASS OPENER

Features 13.5" blades with 1/4" offset to aid in penetration. Has the ability to plant three different seed types at three depths and three rates – at the same time. Extra-large seed tube for native grass allows the seed to flow to the trench without bridging.



NO-TILL CONVERSION

Add a Center Pivot Hitch to turn a 3PNG12 or a 3PNG15 into a no-till drill (Note: drill must be equipped with single gauge wheels).



PRESS WHEEL OPTIONS

Choices include 3"x13" double rib* press wheels, 3"x13" center rib press wheels, or 2"x13" smooth press wheels that firm the soil directly over the seed.



DUAL OR 2 SINGLE GAUGE WHEELS

Choose between single or dual gauge wheels. Single gauge wheels can be ordered with either implement tires or heavy-duty skid steer tires.



SIMPLE GROUND DRIVE

The adjustable ground-drive gauge wheel features 4" of travel for following the contours of uneven fields.