



60' BULK-FILL

Great Plains proudly introduced the industry's first 60' planter that offered 15" and twin-row 30" spacings, in addition to standard 20" and 30" rows. This planter, called the YP2425A, features a floating-hitch design that provides the flexibility

to meet challenging terrain. In spite of its vast size, this 60' Yield-Pro model easily folds to a transport width of only 15' 3", while its telescoping tongue retracts in field position for short headlands and outstanding maneuverability.



60' BULK-FILL

60' Bulk-Fill	Working Width	Transport Width	Transport Height	Engine H.P. Required	Row Spacing	Base Weight	Seed Capacity
YP2425A	60'	15' 3"	12' 1"	280+	15", 20", 30", TR30"	18,420-23,650	2 82-bu. hoppers


See www.greatplainsag.com for complete specifications.
 Specifications are subject to change without prior notification.
 Images may not depict current or standard production models.

YP2425A



FEATURES & BENEFITS

25 SERIES ROW UNIT

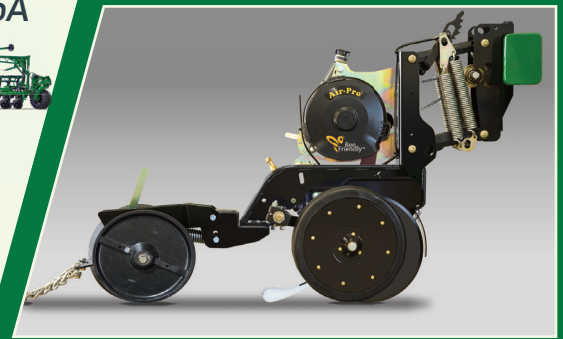

The 25 Series row unit utilizes ductile cast parallel arms for long-term row unit stability. 15" .4mm blades turning on 205 triple-lip sealed bearings ensure long life and accurate seed depth. Blades are offset 1/2" to slice residue and form a perfect seed trench.



ADDITIONAL STANDARD FEATURES

- Advanced air delivery system
- Side-depth wheels are 2 1/2"-wide on twin row models; 3"-wide on 15" and 20" models; 4"-wide on 30" models
- 380/70R - 19.5 tires
- Low-profile flat-fold markers
- Blade separator w/ fertilizer tube
- 4mm blades
- 205 triple-lip sealed bearings
- Variable-rate hydraulic drive
- Heavy-duty row unit down pressure springs (up to 500 lbs./row)
- Central filling platform
- LED safety lighting



LARGE-CAPACITY BULK HOPPERS

YP-2425A Planters are equipped with two 82-bu. poly hoppers. With its 164 bu. capacity, it can plant up to 160 acres of soybeans or 250 acres of corn in one fill. This increases efficiency by approximately 52% in soybeans and 12.8% in corn when compared to individual hoppers.




TELESCOPING TONGUE

the 60' Yield-Pro® model easily folds to a transport width of only 15' 3". The telescoping tongue retracts in field position for short headlands and outstanding maneuverability.



PRESS WHEEL CHOICES

Choose (from left) cast, wedge, 1"x12" double-V for all-around performance, or spider wheels with drag chains that aggressively close the seed trench.



NARROW ROW-SPACING OFFERED


Choose either 30", 20", 15", or twin-row 30". The twin-row option has twin openers spaced 8" apart, with 30" to the next set of twins.



AIR-PRO® METERS

Offers the highest level of singulation on the market today, and achieves uniform spacing by "dead-dropping" the seed into the trench.

OPTIONS (see website for complete list of features & options)



ROW-PRO™



SWATH COMMAND™



COULTERS & ROW CLEANERS



ISO-6 CONTROL SYSTEM