



6' MOUNTED NO-TILL

Seed close to field edges with the 3P606NT 3-Point Mounted No-Till Drill. This rugged 6' seeder is ideal when space is limited or when maneuvering among trees and other obstacles. Loaded with features, this heavy-duty no-till drill

includes 450-lb. preloaded coulters, an easily-accessible calibration crank, a ground-driven metering system, and rain-tight seed box lids.



6' MOUNTED NO-TILL MODEL

FEATURES & BENEFITS

6' Mounted No-Till	Row Spacing	Working Width	Transport Width	Transport Height	Engine H.P. Required	Weight
3P606NT	7.5"	67.5"	72.5"	N/A	60+	2,280

3P606NT



See www.greatplainsag.com for complete specifications.

Specifications are subject to change without prior notification. Images may not depict current or standard production models.

06 SERIES OPENER

The 06 Series row unit utilizes the "Fluff and Plant" no-till system with an integrally-mounted couler to cut residue and prepare a mini seedbed for the trailing double-disc opener. The opener discs are 13.5" in diameter and 4mm thick with 205 triple-lip sealed bearings, and 1/4" opener disc lead. Our unique full-length seed tube design and trailing flap control the seed all the way to the bottom of the seed trench where the seed stays in place.



ADDITIONAL STANDARD FEATURES

- Cat. 2 lower hitch plates
- V-bottom dividers
- Digital acremeter
- 2 bu./ft. box capacity
- 1 3/4" fluted feed cups w/ powdered metal flutes
- Calibration crank
- Grease bank
- Direct link press wheel for depth control
- Heavy-duty coil springs
- Seed tubes and flaps
- Walkboard w/ steps
- Spring steel couler mounting bars
- Watertight manual holder
- LED safety lighting

CAPABLE
3 BOX 3 SEED 3 RATE
3 3 3

LEAD COULER OPTIONS

Choose between a 5/16" fluted couler blade (left) that penetrates easily for minimum tillage or a 5/8" Turbo couler blade (right) that is more aggressive and prepares a mini seedbed ahead of the opener. Preloaded springs offer 450 lbs. of down pressure per row on the leading couler.

PRESS WHEEL OPTIONS

Choices include, from left, 3"x13" double rib*, 3"x13" center rib, 2"x13" smooth, 1"x12" double-V, or double wedge-style press wheels that create a pinching action to close the seed trench.

OPTIONS (see website for complete list of features & options)

*only available by ordering through Parts

4-SPEED GEARBOX

Changing seed rates is quick and effortless with these permanently lubricated, sealed gearboxes.




CENTER-MOUNTED DRIVE WHEEL

Eight settings allow the height of the ground drive wheel to be repositioned as needed.




T-HANDLE DEPTH CONTROL

18-position T-handle adjusts the rear gauge wheel for accurate depth control.



SMALL SEEDS BOX ATTACHMENT

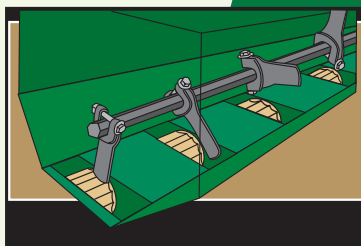

SEED BOX AGITATOR



NATIVE GRASS BOX



WEIGHT BRACKET