



FOLDING CUTTERS

Great Plains Folding Rotary Cutters are offered in working widths ranging from 12' to 20'. Choose from a variety of standard-duty to extra-heavy-duty cutters. Additionally, both 540- and 1000-rpm drive models are offered to match a va-

riety and range of horsepower. Multiple axle and tire options are available to fit all conditions. Depending on the model, the heavy-duty gearboxes can cut brush from 1½" to 4½" in diameter. No job is too big for these rugged cutters!



FOLDING CUTTER MODELS

FEATURES & BENEFITS

Folding Models

FLAT TOP DECK DESIGN

This design prevents chopped material from accumulating on top of the deck and reduces the need for frequent cleaning.

Folding Cutters	Working Width	Transport Width	Overall Length	Engine H.P. Required	Weight	Cutting Height	Cutting Capacity
RC2512	12'	7' 11"	13' 3"	40-100	2,540	1.5"-12"	1.5'
RC2515	15'	8' 4"	15' 6"	50-100	3,202	2"-13"	1.5'
RC(M)3620	20'	9' 11"	17' 6"	70-160	6,680	2"-12"	2"
RC(M)3712	12'	9' 4"	15' 3"	50-160	3,730	1.5"-14"	3"
RC(M)3715	15'	10' 3**	16' 3"	50-160	4,380	1.5"-16"	3"
RC(M)4620	20'	9' 11"	17' 6"	70-250	6,540	2"-12"	3"
RC(M)4715	15'	10' 3**	16' 3"	50-250	4,700	1.5"-16"	4"
RC(M)5020-2	20'	8' 9"	19' 3"	90-250	6,528	2"-14"	3"
RC(M)5615	15'	9' 1"	16'	50-250	5,446	2"-14"	4"
RC(M)6615	15'	9' 1"	16'	50-250	5,660	2"-14"	4.5"
RCB(M)6615	15'	9' 1"	16'	50-250	5,738	2"-14"	4.5"



See www.greatplainsag.com for complete specifications.

*7'3" with narrow option

Specifications are subject to change without prior notification. Images may not depict current or standard production models.

ADDITIONAL STANDARD FEATURES

- 540-rpm or 1000-rpm gearbox (1000-rpm is not available on RC2512 or RC2515)
- Blades: 1/2" x 4" heat-treated, free-swinging alloy steel w/ uplift (2 per section)
- Input driveline: constant-velocity U-joint Cat. 6 (Cat. 5 on RC25)
- Blade bolts are keyed w/ hardened flat washer and locknut
- 6 or 8 wheels w/ individual spring-cushioned wheel arms
- Tapered roller bearings and cast iron 5-bolt hubs w/ 1 1/4" shaft
- Stump-jumper: 3/16", round dish-shaped pan
- 6" blade overlap
- Wing transport locks
- LED safety lighting



CV DRIVELINE CHOICES

Constant-velocity U-joint drivelines improve the turning radius over standard driveline models. Main drivelines are Cat. 6 with wing choices of Cat. 4 or 5 — both with slip-clutches.



7-YEAR LTD GEARBOX WARRANTY

Choose 540- or 1000-rpm gearboxes with up to 7 years limited warranty. Although these heavy-duty gearboxes are designed for years of trouble-free use, warranty offers peace of mind.



MULTIPLE GUARD CHOICES

Choose between single row chain, double row chain, double row chain with cable, or rubber guard.



NINE WHEEL & AXLE OPTIONS


Choice of used aircraft tires with or without foam, or laminated tires in various sizes and with duals or walking tandem axles.



REVERSIBLE SKID SHOE

Skid shoes, located on center and wing sections, are reversible and replaceable.

OPTIONS (see website for complete list of features & options)

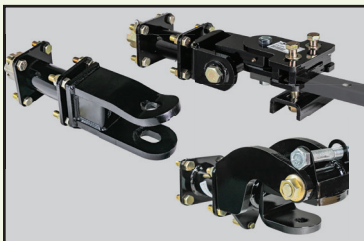

HITCH OPTIONS



INDEPENDENT WING CONTROL



DECK RINGS



LIGHTS