



“

TRUCK SPREADERS & ACCESSORIES

MORE JOBS.
DONE FASTER.



westernplows.com



RISE TO NEW CHALLENGES

WHETHER OR NOT THEY HAPPEN DURING REGULAR BUSINESS HOURS

When snow and ice control is your profession, it's up to you to keep the world moving through winter's worst. Less time worrying about your equipment means more time keeping your lots free of snow and ice.

The ticking clock controls your paycheck. Minutes wasted are dollars lost. When your schedule is packed and your budget even tighter, the only thing worth your hard-earned money is *better results*.

That's why Western Products builds efficiency into every feature of our spreaders and plows. With 70 years of experience behind us, Western Products knows what it takes to conquer all the depths of winter.

Mother Nature may not offer guarantees—but we build a promise into every piece of equipment we make:

MORE JOBS. DONE FASTER.

- 6-11** HOPPER
- 12-15** TAILGATE
- 16-17** WALK-BEHIND / STORAGE
- 18-23** ACCESSORIES / SPECS

PRE-WET SYSTEM ACCESSORY FOR HOPPER SPREADERS

USE LESS SALT AND ACCELERATE MELTING

The WESTERN® pre-wet system accessory allows the operator to pre-wet material with a brine solution just before it hits the spinner. This provides two distinct advantages over dry applications: pre-wetting salt “activates” the material to accelerate melting and pre-wet granules bounce less when hitting the pavement for greater material control. Studies have proven application rates can be reduced by up to 30% when pre-wetting salt with liquids.



AVAILABLE FOR TORNADO HOPPER SPREADERS

- Available in 50-gallon kits (two 25-gallon tanks)
- 1.5 cu yd, 1.8 cu yd, and 2.5 cu yd models can accept up to two of the 50-gallon kits for a maximum capacity of 100 gallons*
- Compatible with all Tornado hopper spreaders manufactured February 2016 or later
- With the purchase of an additional adapter kit, any Tornado hopper spreader manufactured between 2009 and January 2016 can accept the pre-wet system
- A corrosion-resistant, fully enclosed housing protects the pump, electronics and valves from the elements

TWO CONTROL OPTIONS

The updated FLEET FLEX electrical system control for Tornado and Striker hopper spreaders includes a pre-wet accessory button which provides simple on/off** operation, allowing the operator to choose when to apply brine while spreading. The flow rate is set manually using the valve in the pump housing.

AVAILABLE FOR ALL STRIKER HOPPER SPREADERS

- Available in 50-gallon kits (two 25-gallon tanks) or 100-gallon kits (two 50-gallon tanks)
- 1.5 cu yd, 2.0 cu yd, and 3.0 cu yd models can accept up to two of the 50-gallon kits for a maximum capacity of 100 gallons*
- 4.5 cu yd and 6.0 cu yd models can accept up to two of the 50-gallon or 100-gallon kits for a maximum capacity of 200 gallons*
- 0.7 cu yd model can accept one 50-gallon kit for a maximum capacity of 50 gallons
- A corrosion-resistant, fully enclosed housing protects the pump, electronics and valves from the elements


For operators who want additional flow control from inside the cab, a separate in-cab control option is available, featuring a flow-control dial and warning lights that alert the operator of a clog or if the tanks are empty.

Photos may be shown with optional accessories.

*When using a vibrator kit with the Tornado hopper, only one of the 50-gallon kits can be used. When using a vibrator kit with the Striker hopper, only one of either the 50-gallon kits or the 100-gallon kits can be used.

**On Striker gas and hydraulic models, the on/off switch is incorporated into the master accessory harness control panel.

UNIVERSAL FEATURES FOR ALL HOPPER SPREADERS

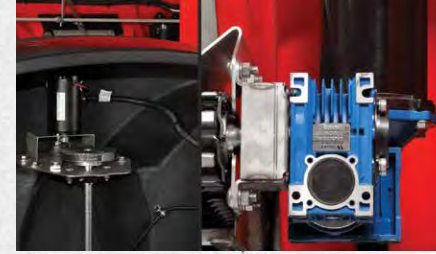

DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable and independent control over the conveyor and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.



STEEL PINTLE CHAIN CONVEYOR

One of the widest in the industry, the 16½" conveyor moves more material consistently and smoothly to help reduce bridging. The corrosion-resistant, stainless steel conveyor housing provides added protection and rigidity.




DUMP AND WORK LIGHT SWITCHES*

Located at the rear of the hopper, two dump switches run the conveyor for easily unloading excess material or quickly filling a walk-behind or tailgate spreader. An additional switch is also provided so that an accessory work light may be conveniently controlled from not only the cab but also the rear of the hopper.



DUAL VARIABLE-SPEED CONTROL*

Precisely match material delivery and spread patterns to conditions. Four standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency. Easy-to-understand, digital self-diagnostics alert the operator when the hopper is empty or when adjustments are needed, and LEDs make the controls easy to read.

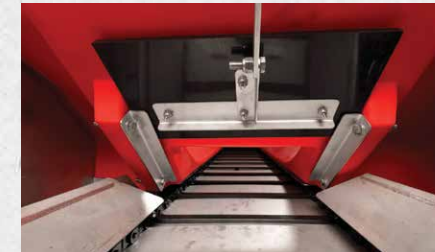


ADJUSTABLE FEED GATE

An adjustable feed gate controls the amount of material flowing from the hopper to the spinner to regulate material flow and helps reduce waste when traveling between sites.



TOP SCREEN

The standard, coated-steel top screen helps break up large chunks of de-icing material during the loading process to help prevent clogging and bridging during spreader operation.

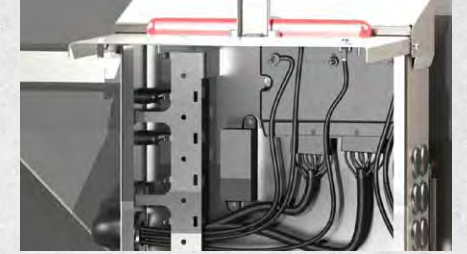

ACCESSORY INTEGRATION*

Conveniently connect accessories directly into the fully enclosed accessory hub mounted in the back of the hopper. Accessories automatically integrate with the hopper control without having to run additional wires from the front of the truck.



SPINNER AND SPREADING WIDTH

An extra-large, 15½" polyurethane spinner delivers a spreading width of up to 40' and provides long-lasting, corrosion-free performance.

FLEETFLEX
ELECTRICAL SYSTEM

FLEET FLEX ELECTRICAL SYSTEM

The Striker™ hopper spreader and Tornado™ hopper spreader are designed with FLEET FLEX technology for easy interchange between electric hopper spreaders without having to change the wiring or the controls. It provides easy operation, increased reliability, simple wiring and easy installation. Additionally, accessories automatically integrate into the control for easy plug 'n' play.

COVERAGE YOU CAN COUNT ON.

For reliable, low-maintenance performance, the WESTERN® Tornado™ hopper spreader has a variety of features built to put more control at your fingertips, delivering efficient salt- and sand-spreading operation. The rugged, one-piece poly hopper includes overlapping lids to provide unsurpassed protection for your salt or sand load.

TWO-PIECE POLY HOPPER COVER

The two-piece poly hopper cover shields de-icing material from the elements. The Tornado spreader's overlapping cover design seals out moisture while molded water grooves direct runoff away from the hopper. When opened, the cover forms a spill guard to keep overflow material out of your truck.

CORROSION-RESISTANT HOPPER

The one-piece, double-walled hopper is built of durable polyethylene for corrosion-free performance, whether using rock salt, calcium chloride, sand, or any other type of de-icing material.

DROP CHUTE

The adjustable-height poly drop chute accommodates both pickup truck and flatbed applications, ensuring a proper spreading height.

REMOVABLE CHUTE ASSEMBLY

For convenient access to the hitch or for material off load, the chute assembly can be removed—no tools required.

CONVENIENT STORAGE

With the drop chute removed, the Tornado™ hopper spreader can easily be removed from the truck and the entire unit stands on end to minimize the space needed for storage. Support blocks are required for off-season storage.

ADDITIONAL STANDARD FEATURES

Tie-down points are included for strapping the hopper to the truck. For additional safety, bolting bars are also provided to attach the hopper to the vehicle and a Center High-Mounted Stop Light (CHMSL) is standard.

ACCESSORIES

Pre-Wet System | Central Point Grease Kit
Work Light Kit | Strobe Light Kit
Stainless Steel Inverted V Kit | Vibrator Kit
Hold Down Kit | License Plate Kit

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



THREE SIZE OPTIONS

7' 1.5 cu yd | 8' 1.8 cu yd | 8' 2.5 cu yd

See page 5 for all universal hopper spreader features.



IN IT FOR **THE LONG HAUL.**

Minimize waste and maximize profits with the WESTERN® Striker™ stainless steel hopper spreader. A dual variable-speed control and an innovative chute design allow operators to easily control salt and sand spread. Ultra-durable and loaded with the latest in snow and ice control technology, the Striker hopper spreader helps you take your de-icing operation further.

CORROSION-RESISTANT HOPPER

Built with low-maintenance, rust-resistant stainless steel, the hopper is reinforced with wrap-around welded joints for long-life and protection against stress.

INNOVATIVE CHUTE DESIGN

Reduce material waste with this innovative chute design that delivers material to the areas of the spinner that cast it out and away from the truck, instead of back onto your bumper.

SHUTTER DEFLECTOR

The easy-to-adjust, circular shutter deflector allows one-side spreading operation, providing optimal control by keeping materials away from areas they aren't needed and spreading more evenly where they are.

INVERTED V

The standard inverted V located inside the hopper helps keep sufficient material weight off of the conveyor, ensuring smooth startup and flow of material.

DROP CHUTE

The adjustable-height drop chute accommodates both pickup truck and flatbed applications, ensuring a proper spreading height. A chute extension is standard with the 9' and 10' models. An extension kit is available as an accessory only on 7' and 8' models.

REMOVABLE CHUTE ASSEMBLY

For convenient access to the hitch or for material off load, the chute assembly can be easily removed without the use of tools.

DUAL-SWING CHUTE

The dual-swing chute design opens from either side to provide easy access for maintenance or material unloading.

POWER OPTIONS

In addition to the standard dual electric motors, the Striker™ stainless steel hopper spreader is available with gas and hydraulic power options.

Striker
1.5 - 6 CU YD

ADDITIONAL STANDARD FEATURES

Ratchet straps, tie-down points and bolting bars are included for strapping the hopper to the truck. For additional safety, a Center High-Mounted Stop Light (CHMSL) is standard.

ACCESSORIES

Pre-Wet System | Work Light Kit
Strobe Light Kit | Spill Guard Kit
Central Point Grease Kit | Vibrator Kit
Tie-Down Chain Kit | License Plate Kit
6" Side Extensions

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



SIX SIZE OPTIONS

7' 1.5 cu yd | 8' 2.0 cu yd | 9' 3.0 cu yd
9' 4.5 cu yd | 10' 4.5 cu yd | 10' 6.0 cu yd

See page 5 for all universal hopper spreader features.



PURPOSE-BUILT FOR HALF-TON, LIGHT-DUTY AND COMPACT TRUCKS.

The WESTERN® Striker™ 0.7 and 0.35 cu yd stainless steel hopper spreaders offer the features and accessories that give you the performance, capabilities, and efficiency of the larger Striker hopper spreaders, but in a more compact size that's better suited to handle smaller spaces and jobs. It's been designed to provide excellent material flow and delivery to the spinner.

CORROSION-RESISTANT HOPPER

The low-maintenance, stainless steel, riveted construction provides durability for long-life and protection against stress.

MATERIAL DELIVERY

Features a pintle chain conveyor system—15½"-wide on 0.7 cu yd unit & 11½"-wide on 0.35 cu yd unit—that moves material consistently and smoothly to prevent bridging.

DUAL VARIABLE-SPEED CONTROL

Allows operators to easily control salt and sand spread and precisely match material delivery and spread pattern to conditions.

FLIP-UP CHUTE

Provides convenient access to the hitch and easy clean-out.

50-GALLON PRE-WET & DIRECT LIQUID APPLICATION KIT (0.7 cu yd ACCESSORY)

With the addition of this accessory, operators will have the ability to pre-wet materials or spray brine directly onto the driving surface for anti-icing applications. The accessory kit includes two 25-gallon pre-wet tanks, a pump, and a spray kit.

EXTENSION COLLAR

A 0.25 cu yd extension collar for the 0.35 cu yd unit and a 0.5 cu yd extension collar for the 0.7 cu yd unit are available as an accessory to increase material capacity for trucks that can handle the additional weight.

ACCESSORY INTEGRATION

Conveniently connect accessories directly into the fully enclosed accessory hub mounted in the back of the hopper. Accessories automatically integrate with the hopper control without having to run additional wires from the front of the truck.

Striker
0.7 & 0.35 CU YD

0.7 cu yd ACCESSORIES

0.5 cu yd Extension Collars | 50-Gallon Pre-Wet and Direct Liquid Application Kit | Spill Guard Kit | LED Work Light Kit | LED Strobe Light Kit | Central Point Grease Kit | Vibrator Kit | Inverted V Kit | Hold Down Kit

0.35 cu yd ACCESSORIES

0.25 cu yd Extension Collars | Spill Guard Kit | LED Work Light Kit | LED Strobe Light Kit | Central Point Grease Kit | Vibrator Kit | Inverted V Kit | License Plate Kit | Hold Down Kit | Truck Upfit Kit

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



COMPACT TRUCK UPFIT KIT

0.35 cu yd Striker model available for compact trucks with the purchase of the truck upfit kit accessory.



CONSISTENCY MEETS EFFICIENCY.

Designed to attach to a wide variety of vehicles, the WESTERN® PRO-FLO™ 525 and PRO-FLO™ 900 poly tailgate spreaders feature a two-stage, auger-fed delivery system and dual variable-speed control for consistent and efficient flow of all types of de-icing materials.

DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable, independent control over the auger and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.

MATERIAL DELIVERY

Material is delivered by a heavy-duty, powder coated, horizontal steel auger that automatically backs itself in and out until an obstruction is cleared or a required adjustment has been made.

DUAL VARIABLE-SPEED CONTROL

Enhanced, dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. Four standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency. Easy-to-understand, digital self-diagnostics alert the operator when the spreader is empty or when adjustments are needed, and LEDs make the control easy to read. Its compact size compared to traditional controls fits easily into today's modern truck cab designs.

SPINNER AND SPREADING WIDTH

The PRO-FLO™ 525 spreader features a 10" nylon/glass-reinforced resin spinner that delivers a spreading width up to 30'. The PRO-FLO™ 900 spreader features a 12" steel spinner that delivers a spreading width up to 40'.

INVERTED V / VIBRATOR

The standard inverted V helps keep sufficient material weight off of the auger, ensuring smooth startup and flow of material. The inverted V is directly connected to a 12-volt vibrator to help reduce bridging and keep material moving to the auger.

ACCESSORY INTEGRATION

Conveniently connect accessories directly into the spreader module mounted in the spinner motor enclosure. Accessories automatically integrate with the tailgate control without having to run additional wires from the front of the truck.

TOP SCREEN AND COVER

The steel rod top screen breaks up chunks of de-icing material and a molded polyethelene lid protects the materials from the elements.

ACCESSORIES

Material Control Tube | Work Light Kit

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



CAPACITY AND MOUNT OPTIONS

PRO-FLO 525 SPREADER

Features a 5.25 cu ft poly hopper for long-lasting durability that holds bagged or bulk de-icing material. Comes standard with a combination 2" receiver hitch and 3-point hitch mount.

PRO-FLO 900 SPREADER

Features a 9.0 cu ft poly hopper for long-lasting durability that holds bagged or bulk de-icing material. Available mount options include a pivot mount, a 2" receiver hitch mount (requires additional adapter) and a 3-point hitch mount.*

*Mounts sold separately.



LOW PROFILE

A DIFFERENT POINT OF VIEW.

Get a better look at your high-quality work as you move onto the next job with the WESTERN® Low Profile tailgate spreaders. These high-density, single-stage, poly tailgate spreaders sit lower on trucks to deliver top spreader performance without affecting the operator's view from behind the wheel.

ELECTRIC DRIVE MOTOR

A fully enclosed, 12-volt electric, 1/3 hp motor is mounted inside a sealed housing, protecting it from corrosion.

CONTROLS

Choose between a variable-speed control with an "on/off" button and blast option to optimize material usage or a basic "on/off" toggle control (controls are sold separately).

COVER

A latching, molded polyethylene lid protects de-icing material from the elements.

SPINNER AND SPREADING WIDTH

Models 500 and 1000 both feature a durable 10" polyurethane spinner that delivers a spreading width of up to 30'. Model 2500 comes standard with a large, 15" polyurethane spinner that delivers a spreading width of up to 30'.

MATERIAL DELIVERY

Material is delivered by a powder coated, vertical steel auger. The unique design helps break up clumps and prevents material from spilling.

ADJUSTABLE FEED GATE

On Model 2500, a specialized "saw-tooth" feed gate and auger design combine to deliver complete, reliable flow control with positive shut-off, eliminating spillage and waste.



RATCHET STRAPS

Ratchet straps are provided standard for additional spreader stability on the Model 500 and 2500 spreaders only.

ACCESSORIES

MODELS 500, 1000 AND 2500

Top Screen | Adjustable Deflector | 5-Flight Auger | Truck Protector Flap (Model 1000 only)

Consult your local WESTERN dealer or westernplows.com for accessory compatibility and availability.

CAPACITY AND MOUNT OPTIONS

MODEL 500 – 5.0 cu ft capacity

Comes standard with a Class III 2" receiver hitch mount.

MODEL 1000 – 8.0 cu ft capacity

Available mount options include a Class IV receiver hitch mount, a fixed mount, or a dual-swing mount*.

MODEL 2500 – 8.5 cu ft capacity

Comes standard with a Class IV receiver hitch mount.

*Mounts sold separately.

LOW-PRO 300W

CONVENIENCE FOR OPERATORS— NO STRINGS ATTACHED.

When winter won't wait, the WESTERN® LOW-PRO 300W wireless electric tailgate spreader quickly mounts onto pickup trucks and SUVs without drilling or wiring. Standard with a completely wireless key fob control, 2" receiver hitch, and a 7-pin plug, this is THE ultimate in plug 'n' play convenience.



ELECTRIC MOTOR

A fully enclosed, 12-volt electric, 1/3 hp motor and maximum-torque transmission drive the spinner mechanism.

CORROSION-RESISTANT HOPPER

The LOW-PRO 300W wireless electric tailgate spreader features a corrosion-free polyethylene hopper for long-lasting durability.

MATERIAL DELIVERY

Material is delivered by a powder coated, vertical steel auger to provide long-lasting, reliable performance.

SPINNER AND SPREADING WIDTH

A 10" spinner made of nylon/glass reinforced resin, and delivers a spread pattern of up to 25'.

EASY ON / OFF

Attaching and detaching is easy with the standard 7-pin plug.

WIRELESS CONTROL

The completely wireless key fob control offers one-touch, on/off operation with two spinner speeds to match the spread pattern to the job.



ACCESSORIES

Clear Weather Cover | Wireless Vehicle Harness (Supplies a 7-wire connection to power the spreader)

Consult your local WESTERN dealer or westernplows.com for accessory compatibility and availability.

CAPACITY AND MOUNT OPTIONS

LOW-PRO 300W

This 3.0 cu ft poly hopper comes standard with a 2" receiver mount. Additional mounts available include a utility mount, drop utility mount, trailer mount and a 3-point mount.

LEAVE NO JOB UNFINISHED.

WESTERN® walk-behind spreaders deliver professional, hassle-free performance. Constructed of sturdy, corrosion-free polyethylene, both the broadcast spreader and the drop spreader can handle most ice-melt materials. With pneumatic tires and a powder coated steel frame, these spreaders are built to stand up to the demands of commercial use.

WB-100B BROADCAST SPREADER

The WB-100B poly broadcast spreader is ideal for wider areas, such as driveways, courtyards, and wide walkways. 100 lb capacity.



WB-160D DROP-STYLE SPREADER

The WB-160D poly drop-style spreader is perfect for narrow walkways and keeping material out of adjacent landscape features. 160 lb capacity.



STANDARD FEATURES

- Clear Hopper Cover
- Powder Coated Steel Frame
- 13" Pneumatic Tires
- Top Screen
- 10" Molded Spinner*

*On WB-100B only.

STOP ICE IN YOUR TRACKS.

Apply liquid anti-icing before the storm to help prevent snow and ice from forming a bond with the pavement, so it's easier to scrape clean down to the surface. The SS-120 walk-behind sidewalk sprayer helps you do just that. Spray anti-icing liquid before the storm and your sidewalks will come out cleaner than ever.

SS-120 SIDEWALK SPRAYER



CAPACITY

12-gallon poly tank with easy-fill cap.

BATTERY-POWERED ELECTRIC PUMP

12-volt electric pump sprays up to one gallon per minute at 60 psi.

RECHARGEABLE BATTERY

Battery powers up to ten full tanks (120 gal) with a single charge.

HEIGHT-ADJUSTABLE NOZZLE

The height-adjustable nozzle sprays up to four feet wide.

CONVENIENT SPRAY WAND

Use the convenient spray wand with 8' coil hose to treat stairs, entryways, and other hard-to-reach places. Features a spray distance of 15'.

OVERSIZE TIRES

*Large 13" pneumatic tires enhance maneuverability over ice and snow.

BRING ON-SITE STORAGE CLOSE TO THE ACTION.

STORAGE CONTAINERS

Increase the efficiency of your crews by bringing the storage of supplies, tools, and PPE closer to where they are used. Western Products helps the work get done faster with a full line of durable, weather resistant, polyethylene storage containers. Four sizes—3, 6, 12, and 18 cu ft—are available to fit your storage footprint. Molded-in fork pockets on the 6, 12, and 18 cu ft models allow for easy placement, even when fully loaded, exactly where storage is needed. To protect the contents, each storage container has a molded-in closure that can be secured with an extended shank padlock.

These versatile containers can be used for a variety of storage applications:

- Rock Salt for Winter Cleanup
- PPE and Oil Dry for Shops and Maintenance Centers
- Bulk Item Storage for Manufacturing Facilities

CAPACITY

The number of 50-lb bags of rock salt that can be stored in each container:

- 3 cu ft = 4 bags
- 6 cu ft = 9 bags
- 12 cu ft = 19 bags
- 18 cu ft = 28 bags



Western Products offers a limited warranty of one year on storage containers.



ACCESSORIES



PROTECT YOUR INVESTMENT WITH WESTERN® PARTS & ACCESSORIES

Ensure your WESTERN equipment remains efficient and reliable season after season with Factory Original parts and accessories from your local WESTERN dealer. Using “will-fit” alternatives can alter your spreader’s performance and may affect your product warranty. Stick with the WESTERN brand for the parts and accessories you need. It’s the smart choice for protecting your investment.



PRE-WET SYSTEM

Activates de-icing material by applying a liquid de-icing agent directly to the material prior to it hitting the spinner.

Fits Spreaders: Striker™ (shown) and Tornado™



SPILL GUARD KIT

Provides loader with improved line of sight and prevents material overflow from off-center loading. Includes prepunched holes for addition of side extensions.

Fits Spreaders: Striker 1.5–6.0 cu yd



LED WORK LIGHT KIT

For better visibility at the rear of the spreader at night.

Fits Spreaders: Striker (shown), Tornado, PRO FLO™ 525 and PRO FLO™ 900



SIDE EXTENSIONS (6")

Increase the carrying capacity with these 6"-tall, bolt-on brackets (wood not included).

Fits Spreaders: Striker



LED STROBE LIGHT KIT

For safety during spreader operation.

Fits Spreaders: Striker (shown) and Tornado



STAINLESS STEEL INVERTED V KIT

Helps reduce heavy startup loads on the drivetrain.

Fits Spreaders: Tornado and 0.7 Striker



VIBRATOR KIT

Helps move stubborn material.

Fits Spreaders: Striker (shown) and Tornado



CENTRAL POINT GREASE KIT

Provides easy access to grease points, simplifying preventative maintenance greasing that is essential to maximize bearing life.

Fits Spreaders: Striker and Tornado (shown)



HOLD DOWN KIT / TIE-DOWN CHAIN KIT

For superior in-bed stability and security.

Fits Spreaders: Tornado (Hold Down Kit) and Striker (Tie-Down Chain Kit—shown)



LICENSE PLATE KIT

Illuminates alternate license plate location.

Fits Spreaders: Striker and Tornado (shown)



SPREADER CONTROL ADAPTER PLATE

Gain the flexibility and easy installation benefits of the cup holder control mount (not included).



MATERIAL CONTROL TUBE

Helps prevent leaking issues when handling fine pellet and flake materials.

Fits Spreaders: PRO-FLO™ 525 and PRO-FLO™ 900



CLEAR WEATHER COVER

Keeps material dry and flowing freely, while offering a clear view inside of the hopper.

Fits Spreaders: LOW-PRO 300W



CONTROL CUP HOLDER MOUNT

Secures your controls on a flexible gooseneck mount for optimal, customizable positioning.



EXTREME DEFENSE™ GREASE

Defends and protects plow and spreader bearings, pivot points, and moving components from wear and corrosion, even in extreme cold.

HOPPER ACCESSORY MATRIX

	Striker Electric Motor	Striker Gas Motor	Striker Hydraulic Motor	Tornado Series
STAINLESS STEEL INVERTED VS				
Striker, 0.35 cu yd	X			
Striker, 0.7 cu yd	X			
Striker, 7' and 8'	std	std	std	
Striker, 9' and 10'	std	std	std	
Tornado (1.8 & 2.5 cu yd models)				X
Tornado (1.5 cu yd model)				
STRIKER CHUTE EXTENSION KITS				
ELECTRIC	X			
GAS		X		
HYDRAULIC			X	
EXTENSIONS				
6" SIDE EXTENSION	X	X	X	
EXPANSION COLLAR	X			
SPILL GUARD (0.35 cu yd model only)	X			
SPILL GUARD (0.7 cu yd model only)	X			
SPILL GUARDS	X	X	X	
HOLD DOWN KITS				
HEAVY DUTY (Chain & Turnbuckle)	X	X	X	X
RATCHET & WEB	std	std	std	std

std = Included standard with spreader
x = Sold separately

Striker Electric Motor Striker Gas Motor Striker Hydraulic Motor Tornado Series

	Striker Electric Motor	Striker Gas Motor	Striker Hydraulic Motor	Tornado Series
HYDRAULIC CONTROL VALVES				
DUAL FLOW — HOPPER			X	
MISC				
MASTER ACCESSORY HARNESS*		X	X	
TARP KIT	X			
POLY LID KIT	X	X	X	
CONTROL CUP HOLDER MOUNT	X	X	X	X
SPREADER CONTROL ADAPTER FOR CUP HOLDER MOUNT	X	X	X	X
CENTRAL POINT GREASE KIT	X	X	X	X
VIBRATOR KIT — FLEET FLEX	X	X	X	X
STROBE LIGHT KIT	X	X	X	X
TRUCK UPFIT KIT — 0.7 cu yd Striker	X			
LICENSE PLATE LIGHT KIT	X	X	X	X
WORK LIGHT KIT — FLEET FLEX	X	X	X	X
SECONDARY WORK LIGHT KIT — FLEET FLEX	X	X	X	X
4' EXTENSION HARNESS (Cab Control)		X		
4' EXTENSION HARNESS (Power/Battery)		X		

*For all gas and hydraulic Striker Hopper Spreaders, the first accessory requires its respective Master Accessory Harness, each subsequent accessory will hook into the harness.

MOUNT & MATERIAL COMPATIBILITY

MOUNTS GUIDE

	PRO-FLO™ 525	PRO-FLO™ 900	LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	LOW-PRO 300W
T A I L G A T E S P R E A D E R M O U N T S						
RECEIVER HITCH MOUNT	std	x*	std	x	std	std
FIXED MOUNT				x		
DUAL-SWING MOUNT				x		
UTILITY MOUNT						x
DROP UTILITY MOUNT						x
TRAILER MOUNT						x
3-POINT MOUNT	std	x				x
PIVOT MOUNT		x				

*Requires additional adapter
std = Included standard with spreader
x = Sold separately

MATERIALS GUIDE

MATERIAL TYPE	ALL Striker™		Tornado™		PRO-FLO 525		PRO-FLO 900		LOW PROFILE 500		LOW PROFILE 1000		LOW PROFILE 2500		LOW-PRO 300W	
	HOPPERS				TAILGATES											
BAGGED ICE MELTERS	x	x	x*	x*	x	x	x	x	x	x	x	x	x	x	x	
BAGGED ROCK SALT	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
BULK SALT	x	x	x	x												
CALCIUM FLAKES	x	x	x*	x*	x†	x†	x†	x†	x†	x†	x†	x†	x†	x†	x†	
CALCIUM CHLORIDE PELLETS	x	x	x*	x*	x†	x†	x†	x†	x†	x†	x†	x†	x†	x†	x†	
50/50 SALT/SAND MIX	x	x														
SAND	x	x														

NOTE: Assumes Dry, Free-Flowing Materials
*May require use of material control tube accessory.
†May require 5-flight auger accessory.

MATERIAL TYPE	WB-100B		WB-160D	
	WALK-BEHINDS			
BAGGED ICE MELTERS	x		x	
BAGGED ROCK SALT	x		x	
BULK SALT	x		x	
CALCIUM FLAKES	x		x	
CALCIUM CHLORIDE PELLETS	x		x	

MATERIAL TYPE	SS-120 SPRAYER		PRE-WET SYSTEM	
	WALK-BEHIND		ACCESSORY	
BRINE	x		x	
CALCIUM CHLORIDE SOLUTION	x		x	
PREMIUM SOLUTIONS	x		x	

Selecting the proper de-icing materials can vary by operator preference, experience and environmental considerations. Consult your local WESTERN® dealer with questions regarding material selection and availability.

SPECIFICATIONS



		Striker™		HOPPER		HOPPER		HOPPER		HOPPER	
SPREADER TYPE	HOPPER	HOPPER	HOPPER	HOPPER	HOPPER	HOPPER	HOPPER	HOPPER	HOPPER	HOPPER	HOPPER
BODY SIDE LENGTH	7' (2.13 m)	8' (2.44 m)	9' (2.74 m)	9' (2.74 m)	10' (3.05 m)	10' (3.05 m)					
CAPACITY	1.50 cu yd (1.15 cu m)	2.00 cu yd (1.53 cu m)	3.00 cu yd (2.29 cu m)	4.50 cu yd (3.44 cu m)	4.50 cu yd (3.44 cu m)	6.00 cu yd (4.59 cu m)					
HOPPER CONSTRUCTION	16 ga SS (1.50 mm)	16 ga SS (1.50 mm)	16 ga SS (1.50 mm)	16 ga SS (1.50 mm)	16 ga SS (1.50 mm)	16 ga SS (1.50 mm)					
DIMENSIONS OVERALL	84" x 50" x 38" (214.00 cm x 127.00 cm x 97.00 cm)	96" x 50" x 33" (244.00 cm x 127.00 cm x 84.00 cm)	108" x 50" x 41" (275.00 cm x 127.00 cm x 105.00 cm)	108" x 70" x 47" (275.00 cm x 178.00 cm x 120.00 cm)	120" x 70" x 47" (305.00 cm x 178.00 cm x 120.00 cm)	120" x 70" x 54" (305.00 cm x 178.00 cm x 138.00 cm)					
WEIGHT	DUAL 12V DC SEALED MOTORS	595 lb (269.89 kg)	615 lb (278.96 kg)	695 lb (315.25 kg)	815 lb (369.68 kg)	—	—				
	GAS 10.5 hp I/C BRIGGS & STRATTON®	—	740 lb (335.66 kg)	820 lb (371.95 kg)	940 lb (426.38 kg)	965 lb (437.72 kg)	1010 lb (458.13 kg)				
	GAS 11 hp I/C HONDA®	—	740 lb (335.66 kg)	820 lb (371.95 kg)	940 lb (426.38 kg)	965 lb (437.72 kg)	1010 lb (458.13 kg)				
	DUAL HYDRAULIC MOTORS	—	615 lb (278.96 kg)	695 lb (315.25 kg)	815 lb (369.68 kg)	840 lb (381.02 kg)	885 lb (401.43 kg)				
CONVEYOR WIDTH	16.5" (42.00 cm)	16.5" (42.00 cm)	16.5" (42.00 cm)	16.5" (42.00 cm)	16.5" (42.00 cm)	16.5" (42.00 cm)					
SPINNER SIZE	15.5" (40.00 cm)	15.5" (40.00 cm)	15.5" (40.00 cm)	15.5" (40.00 cm)	15.5" (40.00 cm)	15.5" (40.00 cm)					
SPREADING WIDTH	Up to 40' (12.19 m)	Up to 40' (12.19 m)	Up to 40' (12.19 m)	Up to 40' (12.19 m)	Up to 40' (12.19 m)	Up to 40' (12.19 m)					
VEHICLE APPLICATION	¾- & 1-Ton Pickup Trucks	¾- & 1-Ton Pickup Trucks	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)					

SS = Stainless Steel

Striker



SPREADER TYPE	HOPPER	HOPPER
BODY SIDE LENGTH	54" (1.37 m)	30" (0.76 m)
CAPACITY	0.7 cu yd (0.54 cu m)	0.35 cu yd (0.27 cu m)
HOPPER CONSTRUCTION	16 ga SS (1.5 mm SS)	16 ga SS (1.5 mm SS)
HOPPER DIMENSIONS	54" x 43" x 28" (137.16 cm x 109.22 cm x 71.12 cm)	30" x 38" x 26" (76.20 cm x 96.52 cm x 66.04 cm)
DIMENSIONS OVERALL	81" x 43" x 46" (205.74 cm x 109.22 cm x 116.84 cm)	57" x 38" x 46" (144.78 cm x 96.52 cm x 116.84 cm)
MIN. BED LENGTH REQ.	44" (111.76 cm)	30" (76.20 cm)
APPROX. WEIGHT (EMPTY) DUAL 12V DC SEALED MOTORS	420 lb (190.51 kg)	235 lb (106.59 kg)
CONVEYOR WIDTH	15.5" (39.37 cm)	11.5" (29.21 cm)
SPINNER SIZE	12" (30.48 cm)	12" (30.48 cm)
SPREADING WIDTH	Up to 30 ft (9.14 m)	Up to 30 ft (9.14 m)
MATERIAL	Salt, Sand, Salt/Sand Mix	Salt, Sand, Salt/Sand Mix
VEHICLE APPLICATION	½-Ton & Light-Duty Pickup Trucks	Compact Trucks

Tornado™



SPREADER TYPE	HOPPER	HOPPER	HOPPER
BODY SIDE LENGTH	7' (2.13 m)	8' (2.44 m)	8' (2.44 m)
CAPACITY	1.50 cu yd (1.15 cu m)	1.80 cu yd (1.38 cu m)	2.50 cu yd (1.91 cu m)
HOPPER CONSTRUCTION	Polyethylene	Polyethylene	Polyethylene
DIMENSIONS OVERALL	108" x 63" x 44" (274.00 cm x 160.00 cm x 112.00 cm)	117" x 63" x 44" (297.00 cm x 160.00 cm x 112.00 cm)	117" x 63" x 51" (297.00 cm x 160.00 cm x 130.00 cm)
APPROX. WEIGHT (EMPTY)	591 lb (268.07 kg)	660 lb (299.37 kg)	734 lb (332.94 kg)
MOTORS	Dual Electric, 12V, Sealed	Dual Electric, 12V, Sealed	Dual Electric, 12V, Sealed
CONVEYOR WIDTH	16.5" (42.00 cm)	16.5" (42.00 cm)	16.5" (42.00 cm)
SPINNER SIZE	15.5" (40.00 cm)	15.5" (40.00 cm)	15.5" (40.00 cm)
SPREADING WIDTH	Up to 40' (12.19 m)	Up to 40' (12.19 m)	Up to 40' (12.19 m)
VEHICLE APPLICATION	¾- & 1-Ton Pickup Trucks	¾- & 1-Ton Pickup Trucks	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)

Photos may be shown with optional accessories.

SPECIFICATIONS

PRO-FLO™ 525 & 900



LOW PROFILE



SPREADER TYPE	TAILGATE	TAILGATE
MODEL	525	900
CAPACITY	5.25 cu ft (0.15 cu m)	9.00 cu ft (0.25 cu m)
HOPPER CONSTRUCTION	Polyethylene	Polyethylene
DIMENSIONS OVERALL	20.50" x 38" x 34" (52.10 cm x 96.50 cm x 86.40 cm)	24" x 52" x 36" (60.90 cm x 132.10 cm x 91.40 cm)
APPROX. WEIGHT (EMPTY)	160 lb with mount (72.60 kg)	180 lb w/o mount* (81.70 kg)
MOTOR	Dual Electric, 12V, 1/3 hp	Dual Electric, 12V, 1/3 hp
AUGER (DIA. x LENGTH)	3" x 14" Heavy-Duty Solid Steel (7.26 cm x 35.56 cm)	3" x 20" Heavy-Duty Solid Steel (7.26 cm x 50.80 cm)
SPINNER SIZE	10" (25.40 cm)	12" (30.50 cm)
SPREADING WIDTH	Up to 30' (9.14 m)	Up to 40' (12.19 m)
VEHICLE APPLICATION	Tractors, SUVs, 1-Ton or Smaller Pickups	Tractors, 1-Ton or Smaller Pickups
AVAILABLE MOUNTS	Standard 2" Receiver, 3-Point Combo Mount	Pivot Mount, 2" Receiver Hitch (requires adapter mount), 3-Point Hitch Mount*

SPREADER TYPE	TAILGATE	TAILGATE	TAILGATE
MODEL	500	1000	2500
CAPACITY	5.00 cu ft (0.14 cu m)	8.00 cu ft (0.23 cu m)	8.50 cu ft (0.24 cu m)
HOPPER CONSTRUCTION	Polyethylene	Polyethylene	Polyethylene
DIMENSIONS OVERALL	21" x 39" x 34" (53.34 cm x 99.06 cm x 86.40 cm)	19.50" x 50.50" x 35" (49.53 cm x 128.27 cm x 88.90 cm)	25" x 50" x 42" (63.50 cm x 127.00 cm x 106.68 cm)
APPROX. WEIGHT (EMPTY)	75 lb with mount (34.00 kg)	105 lb w/o mount* (47.00 kg)	131 lb with mount (59.40 kg)
MOTOR	Electric, 12V, 1/3 hp	Electric, 12V, 1/3 hp	Electric, 12V, 1/3 hp
AUGER (DIA. x LENGTH)	2.63" x 6" (6.68 cm x 15.24 cm)	2.63" x 6" (6.68 cm x 15.24 cm)	2.63" x 9" (6.68 cm x 22.86 cm)
SPINNER SIZE	10" (25.40 cm)	10" (25.40 cm)	15" (38.10 cm)
SPREADING WIDTH	Up to 30' (9.14 m)	Up to 30' (9.14 m)	Up to 30' (9.14 m)
VEHICLE APPLICATION	Vehicles with Class III Hitch	Full-Size Trucks (over 6,000 lb GVWR)	Full-Size Trucks (over 6,000 lb GVWR)
AVAILABLE MOUNTS	Standard Class III 2" Receiver Hitch Mount	Optional Fixed Mount, Class IV Hitch Mount, Dual-Swing Mount*	Standard Class IV Receiver Hitch Mount

*Mounts sold separately.



LOW-PRO 300W

SPREADER TYPE	TAILGATE
MODEL	300W
CAPACITY	3.00 cu ft (0.09 cu m)
HOPPER CONSTRUCTION	Polyethylene
DIMENSIONS OVERALL	22" x 30" x 32" (55.90 cm x 76.20 cm x 81.30 cm)
APPROX. WEIGHT (EMPTY)	68 lb with mount (30.80 kg)
MOTOR	Electric, 12V, 1/3 hp
AUGER (DIA. x LENGTH)	2.50" x 5.75" Vertical High-Flow (6.35 cm x 14.61 cm)
SPINNER SIZE	10" (25.40 cm)
SPREADING WIDTH	Up to 25' (7.62 m)
VEHICLE APPLICATION	Tractors, UTVs, SUVs, 1-Ton or Smaller Pickups
AVAILABLE MOUNTS	Standard 2" Receiver, Optional Utility Mount, Drop Utility Mount, Trailer Mount, 3-Point Mount

WB-160D WB-100B

SPREADER TYPE	WALK-BEHIND	WALK-BEHIND
CAPACITY	160 lb (72.00 kg)	100 lb (45.00 kg)
HOPPER CONSTRUCTION	Polyethylene	Polyethylene
DIMENSIONS OVERALL	48" x 38.25" x 36" (121.92 cm x 97.16 cm x 91.44 cm)	50" x 26" x 28" (127 cm x 66.04 cm x 71.12 cm)
APPROX. WEIGHT (EMPTY)	55 lb (24.00 kg)	25 lb (11.00 kg)
SPINNER SIZE	—	10" (25.40 cm)
SPREADING WIDTH	3' (0.91 m)	Up to 20' (6.00 m)



SS-120



SPREADER TYPE	WALK-BEHIND
EMPTY WEIGHT	60 lb (27.20 kg)
DIMENSIONS OVERALL	48" x 28" x 33" (122.00 cm x 71.00 cm x 84.00 cm)
CAPACITY	12 gal (45.40 L)
SPRAYING WIDTH	Up to 48" (122.00 cm)
SPRAYING VOLUME	1 gal/min (3.80 L/min)
FRAME	Powder Coated Steel
TANK	One-Piece LLDPE
MOTORS	12-Volt, Direct-Drive Pump



STORAGE CONTAINERS

	STORAGE	STORAGE	STORAGE	STORAGE
MODEL NUMBER	74069	74071	74073	74075
MATERIAL CAPACITY	3 cu ft	6 cu ft	12 cu ft	18 cu ft
EMPTY WEIGHT	19 lb (8.62 kg)	35.5 lb (16.10 kg)	50.5 lb (22.91 kg)	58 lb (26.31 kg)
OVERALL LENGTH	33" (83.82 cm)	48" (121.92 cm)	48" (121.92 cm)	48" (121.92 cm)
OVERALL WIDTH	22.75" (57.79 cm)	33.25" (84.46 cm)	33.25" (84.46 cm)	33.25" (84.46 cm)
OVERALL HEIGHT	17.4" (44.20 cm)	20.75" (52.71 cm)	27.75" (70.49 cm)	35.75" (90.81 cm)
FORK POCKETS	No	Yes	Yes	Yes

WEBSITE RESOURCES

FIND THE SPREADERS THAT BEST FIT YOUR FLEET

Much like the variety of spreading materials on the market, there are countless spreader options available. Western Products manufactures a full line of spreaders from walk-behind spreaders to bed-mounted and dump box spreaders. Find the WESTERN spreaders that will help you get more jobs done faster at westernspreader.com.



YOUR LOCAL WESTERN® DEALER IS HERE TO HELP

Call or visit your local WESTERN dealer to learn more about Western Products' full-line of professional-grade snowplows and spreaders, to inquire about product availability or installation, or ask any questions about which products would be the best fit for your job or vehicle applications. Find your local WESTERN dealer by visiting westernplows.com/dealers.

WARRANTY & REGISTRATION

Western Products offers a 2-year limited warranty on most WESTERN snow and ice control products. Register your equipment today to create a record of your purchase and receive a full range of benefits including trouble-free warranty work, serial number identification for theft protection, and promotions. Register your products by visiting westernplows.com/warranty.



Western Products | P.O. Box 245038 | Milwaukee, WI 53224-9538

TWO WINTER  WARRANTY

westernplows.com



Western Products reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Western Products or the vehicle manufacturer may require or recommend optional equipment for spreaders. Do not exceed vehicle ratings with a spreader. This product is manufactured under the following US patents: 7,400,058; 7,737,576; 7,540,436; 9,033,265; and other patents pending. Western Products offers a limited warranty for all spreaders. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: CONTRACTOR GRADE®, EXTREME DEFENSE™, IMPACT™, MVP 3™, PRO-FLO™ 525, PRO-FLO™ 900, Striker™, Tornado™, Tornado™ UTV, WESTERN®, WIDE-OUT™, WIDE-OUT™ XL.

©2021 Douglas Dynamics, LLC
All rights reserved.

 A DIVISION OF DOUGLAS DYNAMICS, LLC

Printed in U.S.A.
Form No. 72833 - AU21