



“

SNOW & ICE CONTROL ATTACHMENTS FOR OFF-ROAD VEHICLES

MORE JOBS.
DONE FASTER.





RISE TO NEW CHALLENGES WHETHER OR NOT THEY HAPPEN DURING REGULAR BUSINESS HOURS

- 4-7** UTV PLOW
- 8-9** MANUAL ANGLE / TRACTOR
- 10-11** SKID-STEER
- 12-13** PUSHER PLOW
- 14-25** UTV SPREADER
- 26-29** SIDEWALK
- 30-33** ACCESSORIES
- 34-38** SPECIFICATIONS

When plowing is your profession, it's up to you to keep the world moving through winter's worst. Less time worrying about your equipment means more time for clearing lots.

The ticking clock controls your paycheck. Minutes wasted are dollars lost. When your schedule is packed and your budget even tighter, the only thing worth your hard-earned money is *better results*.

That's why Western Products builds efficiency into every feature of our plows and spreaders. With more than 70 years of experience behind us, Western Products knows what it takes to conquer all the depths of winter.

Mother Nature may not offer guarantees—but we build a promise into every piece of equipment we make:

MORE JOBS. DONE FASTER.

BIG PLOW PERFORMANCE FOR YOUR UTV.

Winter knows no limits—which means you shouldn't either. Built exclusively for utility vehicles, the WESTERN® IMPACT™ Heavy-Duty UTV snowplows are professional-grade plows built to go anywhere that demands WESTERN-grade performance. Constructed from high-strength, low alloy steel components, both models feature an easy-on/easy-off UTV mounting system and removable receiver brackets for exceptional ground clearance. IMPACT UTV plows feature Scrape Lock for clean scraping and back dragging.

ACCESSORIES

Rubber Snow Deflectors | Poly Cutting Edges | Shoe Kits | Light Bar Kit
Curb Guards (straight blade only) | Wing Extension Kits (V-plow only)
Blade Stop Kit (V-plow only)

Consult your local WESTERN dealer or westernplows.com for accessory compatibility and availability.



HEAVY-DUTY UTV PLOWS

V-PLOW BLADE

BLADE CONSTRUCTION

The IMPACT™ flared V-plow blades go from a 25¼" center height to a full 29¼" at the outer edge.

STRUCTURAL REINFORCEMENT

Six vertical ribs and our proven T-frame design provide added strength and reinforcement.

DOUBLE-ACTING CYLINDERS

UltraLock double-acting cylinders allow the operator to use the v-plow in straight blade mode by locking the wings together instead of having to toggle each wing independently.

STEEL CUTTING EDGES

5" high-carbon steel cutting edge comes standard, reducing wear and extending the life of the blade.

TRIP PROTECTION

Each blade features independent trip-edge protection in all configurations, whether in V, scoop or straight, to keep snow in front of the blade.

STRAIGHT BLADE

BLADE CONSTRUCTION

6'-wide, 14-gauge powder coated steel moldboard.

STRUCTURAL REINFORCEMENT

Four vertical ribs for strength and durability.

STEEL CUTTING EDGES

5" high-carbon steel cutting edge comes standard, reducing wear and extending the life of the blade.

TRIP PROTECTION

Protects your plow and UTV by allowing the whole blade to trip when encountering hidden obstacles.

MID-DUTY UTV APPLICATIONS. HEAVY-DUTY PERFORMANCE.

The WESTERN® IMPACT™ mid-duty straight blade plows are perfectly sized for your mid-duty sport or recreational UTV without sacrificing performance. Packages available in either full hydraulic lift and angle or winch lift manual angle versions. The blade is available in two widths, 5'6" or 6'0"—the 5'6" blade widths are perfect for sidewalks and 6'0" blades are ideal for wider areas/driveways. High-strength components ensure commercial durability. The available hydraulic blade controls allow the operator to make the necessary blade adjustments quickly from inside the cab for fast and efficient winter cleanup.

5'6"- AND 6'0"-WIDE STEEL MOLDBOARD

Constructed from high-strength, low-alloy steel components, Western Products provides better durability and performance than stamped steel or plastic products—especially when working on brutal sidewalk surfaces. To ensure maximum efficiency when cleaning sidewalks, the plows' width covers the wheel track at all times to make each pass count.

SWAY-FRAME™ DESIGN

To ensure the blade stays aligned with the wheel track, the patent-pending Sway-Frame™ design allows the blade to shift side-to-side. This keeps the blade in the optimal position to maximize cleanup with each pass, preventing the UTV wheels from packing down missed snow.

IMPACT™

MID-DUTY UTV STRAIGHT BLADE PLOW

RELIABLE HYDRAULICS*

Full-hydraulic operation allows the operator to position the plow left, right, up, down, or float from inside the cab. This hydraulic system has been specifically designed to operate on mid-duty UTV plows, minimizing amperage draw and weight for seamless operation.

GROUND CLEARANCE

The removable receivers and low profile undercarriage provide exceptional ground clearance to maximize ramp angle, so your unit will be trail ready when the plow is not attached.

ACCESSORIES

Shoe Kit | Rubber Snow Deflector
Cutting Edges | Control Cup Holder Mount
FLEX ARM™ Quick Release Flexible Control Mount

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.

ENHANCED PLOW CONTROL*

The deluxe plow control is IP66-rated against moisture and offers hand-held or dash-mounted operation for added flexibility. The weather-resistant control features large, durable switches which are easy to use—even with heavy gloves on.

*Available for hydraulic models only.






MANUAL ANGLE PLOW

CLEAR THE PATH.

Put your John Deere® Gator™ UTV to work in the winter with a line of manual angle plow blades built to fit your vehicle. Quick and easy attach and detach capability allow you to get snow moved faster than ever.

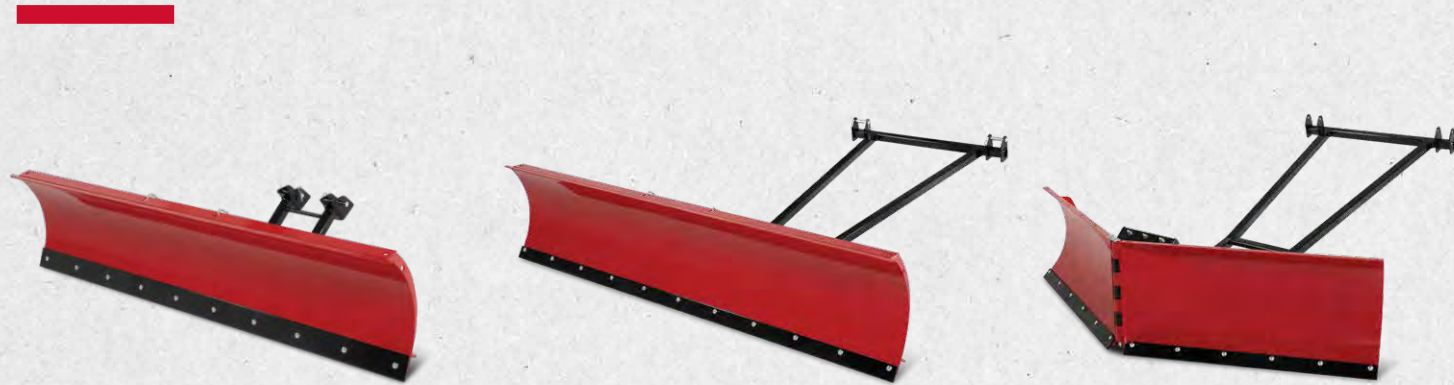

STRAIGHT BLADE – 66"

This quick-attaching front blade includes a winch-operated lift and five-position manual angling. For added durability, the cutting edge and skid shoes are replaceable.

GATOR MODEL COMPATIBILITY:

XUV550/560/590 & RSX850i/860

ACCESSORIES:

Shoe Kit | Cutting Edge

STRAIGHT BLADE – 72"

This straight blade features an optional power lift and three-position manual angling and is quick and easy to install. For added durability, the cutting edge and skid shoes are replaceable.

GATOR MODEL COMPATIBILITY:

XUV625/825/855,
HPX615/620/850D &
MY17/T-Series (TX, TS, TH)*

ACCESSORIES:

Hydraulic Blade Lift Kit (optional)
Shoe Kit | Cutting Edges

V-PLOW – 72"

This blade easily converts to a V, scoop or straight blade position. The blade angle is manually controlled and attaches quickly and easily for faster dirt and snow removal.

GATOR MODEL COMPATIBILITY:

XUV625/825/855,
HPX615/620/850D &
MY17/T-Series (TX, TS, TH)*

ACCESSORIES:

Hydraulic Blade Lift Kit (optional)
Shoe Kit | Cutting Edges

*With the exception of the TE and older HPX



TRACTOR ATTACHMENT KITS

SNOWPLOWING VERSATILITY FOR TRACTORS.

The WESTERN® UltraMount® 2 tractor attachment kits accommodate the demand for tractor mounted snowplowing applications. Designed for easy installation onto a wide range of tractor models, these kits are flared both vertically and horizontally to ensure proper alignment and make the drive-in connection easier. This allows you to attach WESTERN heavy-duty straight blades, v-plows and winged plows to tractors, providing increased efficiency and versatility.

STRAIGHT BLADE PLOWS FOR TRACTORS

The best value from a cost perspective when compared to other snowplow types, straight blade plows also offer operators a number of benefits. Straight blades are the easiest plows to operate with simple controls, and because there are fewer moving parts, they are extremely durable and reliable. When it comes to clearing large, open lots, straight blades are an efficient way to get the job done.

UltraMount 2 attachment kits for tractors are available for the following WESTERN straight blade models:

- PRO-PLOW® Series 2 (7'6", 8' and 8'6" models)
- PRO PLUS® (8', 8'6" and 9' models)

V-PLOWS FOR TRACTORS

Providing power, productivity and performance, plows are a great choice for operators that handle a variety of job types. Operate in mode to break through heavy snow or drifts, scoop mode when in tighter spaces or for carrying large amounts of snow, or lock the wings in straight blade mode when plowing big, wide open spaces. Bottom line, v-plows are the most universal plows to handle all plowing needs.

UltraMount 2 attachment kits for tractors are available for the following WESTERN v-plow models:

- MVP 3™ (7'6", 8'6" and 9'6" models)

WINGED PLOWS FOR TRACTORS

Adjustable and multi-position wing snowplows offer unmatched versatility, letting operators automatically adjust the wings to the most efficient plowing configuration for the job. Adjustable wing plows offer the most control and maneuverability by allowing the wings to move into retracted straight, expanded straight, windrow and scoop positions, all at the touch of a button. Whether plowing in large areas or tighter spaces, get more jobs done faster with winged plow efficiency.

UltraMount 2 attachment kits for tractors are available for the following WESTERN winged plow models:

- PRODIGY™
- WIDE-OUT™ (8'–10' model)

ACCESSORIES

Lighting Harness Kit



WHEN ONLY A SKID-STEER WILL DO.

The WESTERN® skid-steer snowplow lineup makes busting out parking lots quicker and easier than ever before. Choose the easy-to-use and ultra-efficient PRODIGY™ snowplow or the heavy-duty and always reliable PRO PLUS® snowplows, so your crew can get the job done quicker and move on to the next lot faster.



ACCESSORIES

Rubber Deflectors | Shoe Kits | Hydraulic Coupler Kit

Consult your local WESTERN dealer or westernplows.com for accessory compatibility and availability.



PRODIGY™ SKID-STEER PLOW

The PRODIGY snowplow features patented wing technology that automatically adjusts to the most efficient plowing configuration for the job. The automatic movement of the wings is ideal for skid-steers because it provides wing-plow performance on a skid-steer platform with no additional wiring or controls.

PRO PLUS® SKID-STEER PLOW

The impressive strength of the PRO PLUS snowplow makes it the straight blade of choice for punishing skid-steer applications. The PRO PLUS plow comes in a variety of blade widths so you can find the perfect plow for the job.

SKID-STEER

ONBOARD HYDRAULICS

Skid-steer plows are quick to install and easy to operate. Leverage the skid-steer's onboard hydraulic system for powerful, efficient operation. Relief valves help protect the operator and the equipment when encountering hidden obstacles.

OSCILLATING SKID-STEER MOUNT

The universal, oscillating, skid-steer mounting plate provides a number of application options. With six degrees of total side-to-side oscillation, the blade can easily follow the contours of the pavement for a cleaner scrape..



PILE DRIVER™ STEEL EDGE (8' & 10')

PUSH PRODUCTIVITY FURTHER.

Push the productivity of your snow-removal operations further by using the full force of your compact equipment. With the WESTERN® PILE DRIVER™ steel edge pusher plows, operators can push and stack snow confidently with the robust, steel trip-edge design. The pushers quickly and easily attach to skid-steers, backhoes, wheel loaders and tractors requiring only the use of bolt-on, interchangeable attachment plates and are available in multiple sizes.

PLOW BLADE CONSTRUCTION

The 8' and 10' PILE DRIVER steel edge pusher plows come equipped with an enhanced, heavy-duty blade design. The pusher plows feature a 10-gauge moldboard for superior strength and an aggressive 63-degree attack angle to help scrape hard-packed snow and ice. Measuring 32 ½" tall, the pusher plows are finished with a high-gloss, industrial paint that is salt- and UV-resistant to protect against corrosion.

STRUCTURAL SUPPORT

For heavy-duty performance on large accounts, these pusher plows feature six vertical support ribs for structural integrity, which prevents twisting and maximizes bucket impact strength. The robust side-support posts help provide protection for the wings against bending from hitting curbs or other accidental impact.

STEEL TRIP-EDGE

The steel trip-edge design provides a cleaner scrape for hard-packed snow and ice, while protecting you and your equipment when encountering hidden bumps or obstacles.

The steel trip-edge is constructed with four extension springs and reinforced with two double ribs at the trip springs to handle large snow loads and stresses. The steel cutting edge is center-punched, which results in an improved service life.

INTERCHANGEABLE ATTACHMENT PLATES

Interchangeable, bolt-on attachment plates offer the flexibility to quickly and easily attach the pushers to various types of equipment within a fleet, including skid-steers, tractors, backhoes and wheel loaders.

ACCESSORIES

Rubber Cutting Edge | Back Drag Edge
High Wear Shoes | Pusher Plow Chain Kit

Consult your local WESTERN dealer or westernplows.com for accessory compatibility and availability.



SKID-STEER ATTACHMENT PLATES



TRACTOR ATTACHMENT PLATES



WHEEL LOADER/ BACKHOE ATTACHMENT PLATES

PILE DRIVER™ STEEL EDGE (12', 14', 16')

STRENGTHEN THE LINEUP.

The 12', 14' and 16' pusher plows add to the lineup of WESTERN® PILE DRIVER™ steel edge plows. The two-piece, steel trip-edge design delivers a cleaner scrape for hard-packed snow and ice while protecting operators and their equipment when encountering hidden bumps and obstacles. The pushers quickly and easily attach to backhoes, wheel loaders and tractors requiring only the use of bolt-on, interchangeable attachment plates and are available in multiple sizes.

TWO-PIECE, STEEL TRIP-EDGE

The two-piece, steel trip-edge design delivers a cleaner scrape for hard-packed snow and ice while protecting operators and their equipment when encountering hidden bumps and obstacles. Constructed with eight or twelve extension springs, depending on the blade width, the PILE DRIVER pusher plows are built to handle large snow loads and stresses.

INTERCHANGEABLE ATTACHMENTS

Interchangeable attachments offer the flexibility to quickly and easily attach the pushers to various pieces of equipment within a fleet. Attachments include a universal post option for wheel loaders and three different wheel loader carrier options along with their compatible models.

FLOATING ATTACHMENT PLATES

Floating attachment plates smooth out bumps and allow side-to-side movement, keeping the pusher in contact with the surface at all times.

FLOATING SHOES

Floating shoes keep the cutting edge level on uneven surfaces to maintain a clean scrape.



Interchangeable attachments for maximum versatility (wheel loader carrier option shown)



UNIVERSAL POST FOR WHEEL LOADERS

PURPOSE-BUILT FOR UTVS.

The Striker™ 0.35 cu yd stainless steel hopper spreader delivers reliable, low maintenance, and performance with more control. The 0.35 cu yd model is designed to allow material to flow smoothly and efficiently, and is purpose-built with many of the same features of our larger Striker hopper spreaders but at the right size for UTVs.

CORROSION-RESISTANT HOPPER

The low-maintenance, stainless steel, riveted construction provides durability for long-life and protection against stress.

MATERIAL DELIVERY

Features a 11½"-wide pintle chain conveyor system that moves material consistently and smoothly to prevent bridging.

DUAL VARIABLE-SPEED CONTROL

Allows operators to easily control salt and sand spread and precisely match material delivery and spread pattern to conditions.

FLIP-UP CHUTE

Provides convenient access to the hitch and easy clean-out. The chute can be quickly attached or removed and does not require any tools to do so.

DRIVE-TRAIN

Powerful four pole motor and sealed gearbox, offer direct drive and require no maintenance or adjustment. Electronics feature sealed connectors and are well protected from the elements. Their stainless steel enclosure is rugged and requires no tools to gain access to electronics.

ACCESSORY INTEGRATION

Conveniently connect accessories directly into the fully enclosed accessory hub mounted in the back of the hopper. Accessories automatically integrate with the hopper control without having to run additional wires from the front of the UTV.

ACCESSORIES

0.25 cu yd Extension Collars | Spill Guard Kit
LED Work Light Kit | LED Strobe Light Kit
Central Point Grease Kit | Vibrator Kit
Inverted V Kit | License Plate Kit
Ratchet Tie-Down Kit | UTV Spreader Control Shield

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



MORE UTILITY **FROM YOUR UTV.**

The WESTERN® Tornado™ UTV 11 cu ft poly hopper spreader is built just for UTVs. It features a sturdy, compact design that delivers many features of the larger models, in a size just right for your utility vehicle.

DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable, independent control over the auger and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.

DUAL VARIABLE-SPEED CONTROL

Dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. A switch to run the vibrator is integrated into the control for operator convenience.

MATERIAL DELIVERY

Material is delivered by a heavy-duty, powder coated, horizontal steel auger that automatically backs itself in and out until an obstruction is cleared or a required adjustment has been made.

INVERTED V / VIBRATOR

The standard inverted V helps keep material weight off the auger, ensuring smooth startup and flow of material. The inverted V is directly connected to the vibrator to reduce bridging and keep material moving to the auger.

SPINNER AND SPREADING WIDTH

The durable 12" spinner delivers a spreading width of up to 30' and features top and bottom guards that protect the spinner from damage if backed into a solid object.

QUICK-CONNECT SPINNER / CHUTE ASSEMBLIES

Gain easy access to the hitch by removing the quick-connect spinner drive and chute assemblies. No tools required.

CORROSION-RESISTANT HOPPER

The one-piece hopper is built of durable polyethylene for corrosion-free performance.

TOP SCREEN

The standard coated steel top screen helps break up large chunks of de-icing material during the loading process to help prevent clogging and bridging during spreader operation.

COVER

A fitted tarp cover helps de-icing material stay dry to prevent clumping.

RATCHET STRAPS

Add additional spreader stability to your vehicle with standard nylon tie-down ratchet straps.

ACCESSORIES

Material Control Tube | Optimum Flow Kit

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



CONSISTENCY MEETS EFFICIENCY.

Designed to attach to a wide variety of vehicles, the WESTERN® PRO-FLO™ 525 poly tailgate spreader features a two-stage, auger-fed delivery system and dual variable-speed control for consistent and efficient flow of all types of de-icing materials.

DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable, independent control over the auger and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.

MATERIAL DELIVERY

Material is delivered by a heavy-duty, powder coated, horizontal steel auger that automatically backs itself in and out until an obstruction is cleared.

DUAL VARIABLE-SPEED CONTROL

Enhanced, dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. Four standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency. Easy-to-understand, digital self-diagnostics alert the operator when the spreader is empty or when adjustments are needed, and LEDs make the control easy to read.

SPINNER AND SPREADING WIDTH

The PRO-FLO™ 525 spreader features a 10" nylon/glass-reinforced resin spinner that delivers a spreading width up to 30'.

INVERTED V / VIBRATOR

The standard inverted V helps keep material weight off of the auger, ensuring smooth startup and flow of material. The inverted V is directly connected to a 12-volt vibrator to help reduce bridging and keep material moving to the auger.

ACCESSORY INTEGRATION

Conveniently connect accessories directly into the spreader module mounted in the spinner motor enclosure. Accessories automatically integrate with the tailgate control without having to run additional wires from the front of the UTV.

PRO-FLO™ 525

TOP SCREEN AND COVER

The steel rod top screen breaks up chunks of de-icing material and a molded polyethelene lid protects the materials from the elements.

ACCESSORIES

Material Control Tube | Work Light Kit
Spreader Control Adapter Plate for Cup Holder Mount | UTV Spreader Control Shield
Control Cup Holder Mount

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



CAPACITY AND MOUNT OPTIONS

PRO-FLO 525 SPREADER

Features a 5.25 cu ft poly hopper for long-lasting durability that holds bagged or bulk de-icing material. Comes standard with a combination 2" receiver hitch and 3-point hitch mount.



A DIFFERENT **POINT OF VIEW.**

Get a better look at your high-quality work as you move onto the next job with the WESTERN® Low Profile tailgate spreaders. These high-density, single-stage, poly tailgate spreaders sit lower to deliver top spreader performance without affecting the operator's view from behind the wheel.

LOW PROFILE

ELECTRIC DRIVE MOTOR

A fully enclosed, 12-volt electric, 1/3 hp motor is mounted inside a sealed housing, protecting it from corrosion.

SPINNER AND SPREADING WIDTH

Model 500 features a durable 10" polyurethane spinner that delivers a spreading width of up to 30 feet.

CONTROLS

Choose between a variable-speed control with an "on/off" button and blast option to optimize material usage or a basic "on/off" toggle control (controls are sold separately).

COVER

A latching, molded polyethylene lid protects de-icing material from the elements.

MATERIAL DELIVERY

Material is delivered by a powder coated, vertical steel auger. The unique design helps break up clumps and prevents material from spilling.

RATCHET STRAPS

Ratchet straps are provided standard for additional spreader stability on the Model 500 spreader.

ACCESSORIES

Top Screen | Adjustable Deflector | 5-Flight Auger Spreader Control Adapter Plate for Cup Holder Mount.

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



CAPACITY AND MOUNT OPTIONS

MODEL 500 – 5.0 cu ft capacity

Comes standard with a Class III 2" receiver hitch mount.



CONVENIENCE FOR OPERATORS— NO STRINGS ATTACHED.

LOW-PRO 300W

When winter won't wait, the WESTERN® LOW-PRO 300W wireless electric tailgate spreader quickly mounts onto utility vehicles and tractors without drilling or wiring. Standard with a completely wireless key fob control, 2" receiver hitch, and a 7-pin plug, this is THE ultimate in plug 'n' play convenience.

ELECTRIC MOTOR

A fully enclosed, 12-volt electric, 1/3 hp motor and maximum-torque transmission drive the spinner mechanism.

CORROSION-RESISTANT HOPPER

The LOW-PRO 300W wireless electric tailgate spreader features a corrosion-free polyethylene hopper for long-lasting durability.

MATERIAL DELIVERY

Material is delivered by a powder coated, vertical steel auger. The unique design helps break up clumps and prevents material from spilling.

SPINNER AND SPREADING WIDTH

A 10", corrosion-free spinner delivers a spreading width of up to 25' and ensures long life and optimal delivery of bagged salt.

EASY ON / OFF

Attaching and detaching is easy with the standard 7-pin plug.*

*Requires accessory wire harness for integration on UTVs or tractors.

WIRELESS CONTROL

The completely wireless key fob control offers one-touch, on/off operation with two spinner speeds to match the spread pattern to the job.



ACCESSORIES

Clear Weather Cover | Wireless Vehicle Harness (for use on applications where trailer wiring is not factory installed such as tractors and UTVs)

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



CAPACITY AND MOUNT OPTIONS

LOW-PRO 300W

This 3.0 cu ft poly hopper comes standard with a 2" receiver mount. Additional mounts available include a utility mount, drop utility mount, trailer mount and a 3-point mount.



Shown with optional cover accessory.

CONTROL THE ICE WITH PRECISION.

When precision is needed with salt placement, the new line of stainless steel drop spreaders from Western Products is the answer. The Drop™ 250 and Drop™ 600 spreaders provide up to 36" of spread width in a drop pattern so the salt stays exactly where your vehicle drives. And with three mounting systems, these units can fit on most UTVs, compact tractors, or wheel loaders to make quick work of sidewalks, walking paths, and other paved surfaces where truck equipment can't easily gain access.

VARIABLE-SPEED CONTROL

Enhanced speed control allows you to precisely match material delivery rate to the conditions. A single variable-speed control knob provides precise control of material flow rate.

EASY MATERIAL LOADING AND PROTECTION

A hinged bag splitter easily pulls up to open bagged rock salt for easy loading. When not needed, the bag splitter can be folded down and out of the way. The salt is protected by a custom-molded polyethylene lid that is secured by rubber straps.

FREE-FLOWING MATERIAL DELIVERY SYSTEM

The material delivery system has finger-like appendages that agitate the surrounding material with every revolution. This ensures a consistent amount of material flows into the spreader trough and, at the same time, keeps it from bridging.

EASY CLEAN-OUT

The entire trough drops open for easy and fast material clean-out when the job is done. This allows you to store any leftover de-icing material in a dry, weather-resistant container until you need it for the next job.

UP TO 36" SPREAD WIDTH WITH EASY-TO-ACTIVATE BAFFLES

A 36" spread width makes applications on sidewalks and walking paths easy. The WESTERN® Drop™ spreaders can treat these surfaces with one or two passes and limit damage to the grass or sensitive surfaces right next to the path. The spread width can be limited to 30" by activating 3" baffles on either side of the trough.

ACCESSORIES

Strobe Lights | Work Lights | Vibrator
Side Extensions (expands capacity to 4.0 cu ft or 8.0 cu ft)

Consult your local WESTERN® dealer or westernplows.com for accessory compatibility and availability.



HITCH OPTIONS

3-pt Hitch | 2-inch Receiver | In-Bed



RB-400 ROTARY BROOM

SWEEP IT CLEAN.

Wrap up sidewalks and paths in one clean sweep. The WESTERN® RB-400 walk-behind rotary broom is a combination sweeper/snowplow that sweeps and scrapes the sidewalk clean along buildings, curbs and edging.

STANDARD FEATURES

- Adjustable broom-rotation speed and adjustable down-pressure allow you to adapt to any condition.
- The floating, pivoting broom head gives you five angle settings to adjust the trajectory of the snow.
- Quick-attach plow blade features wheels and floating design to move heavy or deep snow.
- Features a seven-position handlebar height adjustment for operator comfort.
- Active-assist steering and freewheel design allow for 360-degree turning.
- The three-speed gear box provides the ideal operating speed, and the powered reverse function improves maneuverability and reduces operator fatigue.
- The unique brush-head design features angled outer bristles to clean close to buildings, curbs and edging.



ACCESSORIES

Debris Catcher | Multi-Purpose Bristles

Consult your local WESTERN dealer or westernplows.com for accessory compatibility and availability.



LEAVE NO JOB UNFINISHED.

WESTERN® walk-behind spreaders deliver professional, hassle-free performance. Constructed of sturdy, corrosion-free polyethylene, both the broadcast spreader and the drop spreader can handle most ice-melt materials. With pneumatic tires and a powder coated steel frame, these spreaders are built to stand up to the demands of commercial use.

WB-100B / WB-160D WALK-BEHINDS

WB-100B BROADCAST SPREADER

The WB-100B poly broadcast spreader is ideal for wider areas, such as driveways, courtyards, and wide walkways. 100 lb capacity.



WB-160D DROP-STYLE SPREADER

The WB-160D poly drop-style spreader is perfect for narrow walkways and keeping material out of adjacent landscape features. 160 lb capacity.



STANDARD FEATURES

- Clear Hopper Cover
- Powder Coated Steel Frame
- 13" Pneumatic Tires
- Top Screen
- 10" Molded Spinner*

*On WB-100B only.



STOP ICE IN YOUR TRACKS.

Apply liquid anti-icing before the storm to help prevent snow and ice from forming a bond with the pavement, making it easier to scrape clean down to the surface. The SS-120 walk-behind sidewalk sprayer helps you do just that. Spray anti-icing liquid before the storm and your sidewalks will come out cleaner than ever.

SS-120 SIDEWALK SPRAYER



CAPACITY

12-gallon poly tank with easy-fill cap.

BATTERY-POWERED ELECTRIC PUMP

12-volt electric pump sprays up to one gallon per minute at 60 psi.

HEIGHT-ADJUSTABLE NOZZLE

The height-adjustable nozzle sprays up to four feet wide.

CONVENIENT SPRAY WAND

Use the convenient spray wand with 8' coil hose to treat stairs, entryways and other hard-to-reach places. Features a spray distance of 15 feet.

PUSH MORE PROFITS.

PUSHER SHOVELS

Available in blade widths of 30" and 36", new WESTERN® Heavy-Duty Pusher shovels are constructed with wear-resistant polyethylene and reinforced at the bracket and handle to withstand the demands of commercial fleets.

STANDARD FEATURES

- The blade is constructed from ultra-high molecular weight polyethylene for superior strength and wear resistance.
- The D-shaped nylon handle improves operator grip when shoveling, season after season.
- A fiberglass pole is securely fastened to the blade with a reinforced triangular base and heavy-duty support bracket for added strength against heavy snow.



BRING ON-SITE STORAGE CLOSE TO THE ACTION.

STORAGE CONTAINERS

Increase the efficiency of your crews by bringing the storage of supplies, tools, and PPE closer to where they are used. Western Products helps the work get done faster with a full line of durable, weather-resistant, polyethylene storage containers. Four sizes—3, 6, 12, and 18 cu ft—are available to fit your storage footprint. Molded-in fork pockets on the 6, 12, and 18 cu ft models allow for easy placement, even when fully loaded, exactly where storage is needed. To protect the contents, each storage container has a molded-in closure that can be secured with an extended shank padlock.

THESE VERSATILE CONTAINERS CAN BE USED FOR A VARIETY OF STORAGE APPLICATIONS:

- Rock Salt for Winter Cleanup
- PPE and Oil Dry for Shops and Maintenance Centers
- Bulk Item Storage for Manufacturing Facilities



PROTECT YOUR INVESTMENT WITH WESTERN® PARTS & ACCESSORIES.



Ensure your WESTERN snow removal equipment remains efficient and reliable season after season with Factory Original parts and accessories from your local WESTERN dealer. Using “will-fit” alternatives can alter your plow or spreader's performance and may affect your product warranty. Stick with the WESTERN brand for the parts and accessories you need. It's the smart choice for protecting your investment.

PLOW ACCESSORIES



RUBBER DEFLECTORS
Provide improved visibility by deflecting snow forward instead of onto your windshield.



POLY CUTTING EDGES
Adjust to road surface irregularities without gouging and quickly remove all types of snow.



HIGH-WEAR CUTTING EDGES
Increase wear resistance and restore your worn base angle to the proper geometry.



SHOE KITS
Glide over gravel and dirt at the correct height and extend cutting edge and base angle life when plowing on rocky or abrasive surfaces. Kits vary by plow model.



WING EXTENSION KITS
Made of 14-gauge steel with high strength steel ribs, the wings are a perfect complement to an IMPACT™ UTV V-plow blade. No installation required—the innovative design means quick and easy attach/detach.
For UTV V-plow



CURB GUARD KITS
Go right up to the edge with bolt-on curb guards. Protect the outer edge of your snowplow from wear when plowing along sidewalks and curbs. Made of cast metal, each curb guard effectively protects the outer edge of the plow.
For UTV straight blade



BACK DRAG EDGE
A top-mounted, rubber back drag edge allows operators to pull snow away from loading docks, doors, and other tight spaces.
For 8' and 10' pusher plow models



HIGH WEAR SHOES
High wear shoes provide increased service life for extreme-use applications.
For 8' and 10' pusher plow models



TRACTOR PLOW LIGHTING HARNESS KIT
The lighting harness kit includes a switch and harness to be installed on the machine and will operate either LED or dual-halogen NIGHTHAWK™ headlamps.
**Wiring only, headlight kits sold separately*

SPREADER ACCESSORIES



SPILL GUARD KIT
Provides the loader with an improved line of sight to the hopper edges and prevents overflow and spill into the bed of the vehicle.
Fits Spreaders: 0.35 Strike™



LED WORK LIGHT KIT
For better visibility at the rear of the spreader at night.
Fits Spreaders: 0.35 Striker (shown), PRO-FLO™ 525, Drop™ 250 and Drop 600



LED STROBE LIGHT KIT
For safety during spreader operation.
Fits Spreaders: 0.35 Striker (shown), Drop 250 and Drop 600



INVERTED V
Helps reduce heavy startup loads on the drivetrain.
Fits Spreaders: 0.35 Striker



UTV SPREADER CONTROL SHIELD
A molded, plastic “visor” attaches to the top of the UTV spreader control to protect it from the rain or snow.
Fits Spreaders: 0.35 Striker (shown), PRO-FLO 525, Drop 250 and Drop 600



OPTIMUM FLOW KIT
Improves material flow and allows spreading of a 50/50 salt/sand mix with a vibrator and dual-pitch baffle.
Fit Spreaders: Tornado™ UTV



MATERIAL CONTROL TUBE
Helps prevent leaking issues when handling fine pellet and flake materials.
Fits Spreaders: Tornado UTV



TOP SCREEN
Helps break up large chunks of de-icing material during the loading process to help prevent clogging and bridging during spreader operation.
Fits Spreaders: Low Profile 500



ADJUSTABLE DEFLECTOR
Positionable deflector to redirect material onto roadway and away from your vehicle. Can be positioned in various directions.
Fits Spreaders: Low Profile 500



5-FLIGHT AUGER
Reduce spillage with a tighter corkscrew design with 5 turns over the same distance as the standard 3.
Fits Spreaders: Low Profile 500



CONTROL CUP HOLDER MOUNT
Designed to fit firmly into most size cup holders in your UTV.
Fits Spreaders: 0.35 Striker and Low Profile 500 (shown)
This is also a plow accessory. Can be used with adapter plate for spreader (shown right).



SPREADER CONTROL ADAPTER PLATE FOR CUP HOLDER MOUNT
Gain the flexibility and easy installation benefits of the cup holder control mount. Contains a durable metal mounting plate and hardware. Cup Holder Mount not included, order separately.
Fits Spreaders: 0.35 Striker (shown), PRO-FLO 525 and Low Profile 500

ACCESSORY COMPATIBILITY

HINGED BLADE

MODEL COMPATIBILITY	IMPACT™ V-PLOW 6'0"	PRODIGY™	WIDE-OUT™	MVP PLUS™ 8'6"	MVP™ 3 8'6"	MVP PLUS 9'6"	MVP 3 9'6"
1/2" STEEL CUTTING EDGE***		X	std	std	std	std	std
5/8" STEEL CUTTING EDGE			X	X	X	X	X
3/4" CARBIDE CUTTING EDGE				X	X	X	X
POLY CUTTING EDGE	X	X	X	X	X	X	X
BACK DRAG EDGE		X	X	X	X	X	X
BLADE STOP KIT				X	X	X	X
CURB GUARDS**	X			X	X	X	X
SECURITY KIT, LED HEADLIGHTS		X	X	X	X	X	X
CUP HOLDER CONTROL MOUNT	X	X	X	X	X	X	X
FLEX ARM™ CONTROL MOUNT	X	X	X	X	X	X	X
PRO GRIP MOUNT KIT	X	X	X	X	X	X	X
WORK LIGHT KIT	X						
DIELECTRIC GREASE	X	X	X	X	X	X	X
HYDRAULIC FLUID	X	X	X	X	X	X	X
HARNESS, UTV LONG (EXT. CAB)	X						
RUBBER DEFLECTOR	X	X	X	X	X	X	X
RUBBER DEFLECTOR (EXT.)	X		X	X		X	X
SHOE KIT	X	X	X	X	X	X	X
EXTREME WEAR SHOE KIT				X	X	X	X
WING EXTENSION KIT	X			X	X	X	X

STRAIGHT BLADE

MODEL COMPATIBILITY	IMPACT™ MD	IMPACT™ HD	PRO-PLOW® SERIES 2 7'6"	PRO-PLOW SERIES 2 8'	PRO-PLOW SERIES 2 8'6"	PRO PLUS® 8'	PRO PLUS 8'6"	PRO PLUS 9'
CUTTING EDGE, EXTENDED WEAR	X							
CUTTING EDGE, POLY	X	X						
1/2" STEEL CUTTING EDGE***			X	X	X	std	std	std
DIELECTRIC GREASE	X	X	X	X	X	X	X	X
BACK DRAG EDGE			X	X	X	X	X	X
CURB GUARD**			X	X	X	X	X	X
CUP HOLDER CONTROL MOUNT	X	X	X	X	X	X	X	X
FLEX ARM™ KIT			X	X	X	X	X	X
HYDRAULIC FLUID	X	X	X	X	X	X	X	X
HARNESS, UTV LONG (EXT. CAB)	X	X						
RUBBER DEFLECTOR	X	X	X	X	X	X	X	X
SHOE KIT	X	X	std	std	std	std	std	std
WING EXTENSION KIT						X	X	X

HOPPER & TAILGATE

MODEL COMPATIBILITY	Striker™ 0.35 CU YD	Tornado™ 0.4 CU YD	300W WIRELESS TAILGATE	LP 500 TAILGATE	PRO-FLO® 525 TAILGATE	DROP™ 250	DROP 600
INVERTED V	X						
EXPANSION COLLAR	X						
SPILL GUARD	X						
SIDE EXTENSIONS						X	X
TARP KIT	X						
UTV SPREADER CONTROL SHIELD	X						
SPREADER CONTROL ADAPTER FOR CUP HOLDER MOUNT	X	X					
OPTIMUM FLOW KIT		X					
AUGER TUBE RESTRICTOR KIT		X					
STROBE LIGHT KIT						X	X
WORK LIGHT KIT						X	X
MATERIAL CONTROL TUBE					X		
WEATHER COVER			X				
ADJUSTABLE DEFLECTOR KIT				X			
LOW-PROFILE SPINNER RING KIT				X	X		
WORK LIGHT KIT (SINGLE) - FLEET FLEX				X	X		
VIBRATOR KIT	X					X	X
LED WORK LIGHT KIT	X					X	X

* MVP 3 cannot use plow shoes and back drag edges simultaneously

** Curb Guards cannot be used simultaneously with Wing Extension Kits

*** 1/2" is standard for PRO PLUS®, MVP PLUS & WIDE-OUT; item sold as Service Part

MOUNT & MATERIAL COMPATIBILITY

MOUNTS GUIDE

	PRO-FLO™ 525	LOW PROFILE 500	LOW-PRO 300W
TAILGATE SPREADER MOUNTS			
RECEIVER HITCH MOUNT	std	std	std
UTILITY MOUNT			X
DROP UTILITY MOUNT			X
TRAILER MOUNT			X
3-POINT MOUNT	std		X
PIVOT MOUNT			

*Requires additional adapter
std = Included standard with spreader
X = Sold separately

MATERIALS GUIDE

	Tornado™ UTV	PRO-FLO 525	LOW PROFILE 500	LOW-PRO 300W
MATERIAL TYPE				
	U T V	T A I L G A T E S		
BAGGED ICE MELTERS	X*	X*	X	
BAGGED ROCK SALT	X	X	X	X
BULK SALT	X	X		
CALCIUM FLAKES	X*	X*	X†	
CALCIUM CHLORIDE PELLETS	X*	X*	X†	
50/50 SALT/SAND MIX	X**			
SAND	X**			

NOTE: Assumes dry, free-flowing materials
 *May require use of material control tube accessory.
 **May require use of optimum flow kit accessory.
 †May require 5-flight auger accessory.


	WB-100B	WB-160D
MATERIAL TYPE		
	W A L K - B E H I N D S	
BAGGED ICE MELTERS	X	X
BAGGED ROCK SALT	X	X
BULK SALT	X	X
CALCIUM FLAKES	X	X
CALCIUM CHLORIDE PELLETS	X	X

	SS-120 SPRAYER	PRE-WET SYSTEM
MATERIAL TYPE		
	W A L K - B E H I N D	A C C E S S O R Y
BRINE	X	X
CALCIUM CHLORIDE SOLUTION	X	X
PREMIUM SOLUTIONS	X	X

Selecting the proper de-icing materials can vary by operator preference, experience and environmental considerations. Consult your local WESTERN® dealer with questions regarding material selection and availability.

SPECIFICATIONS

IMPACT™ HEAVY-DUTY UTV

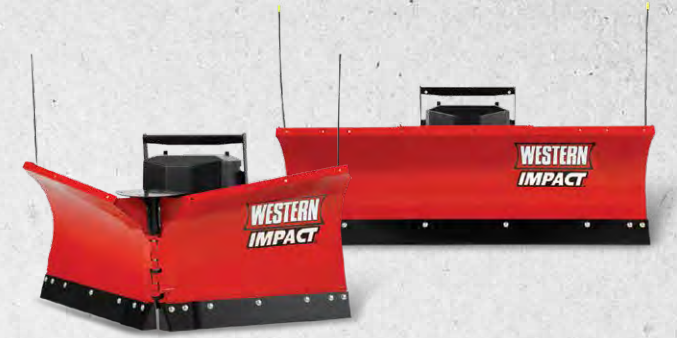

PLOW TYPE	UTV – V-PLOW	UTV – STRAIGHT
MOLDBOARD OPTIONS	Steel	Steel
BLADE WIDTH	6' (1.8 m)	6' (1.8 m)
BLADE HEIGHT	At Center: 25.75" (65.4 cm) At End: 29.25" (74.3 cm)	23.5" (59.7 cm)
BLADE THICKNESS	14 ga	14 ga
TRIP SPRINGS	2	2
RIBS	6	4
LIFT CYLINDER	1.5" x 6" (3.8 cm x 15.2 cm)	1.5" x 6" (3.8 cm x 15.2 cm)
ANGLING RAMS	1" x 8.75" (2.5 cm x 22.2 cm)	1" x 7" (2.5 cm x 17.8 cm)
PLOWING WIDTH* (FULL ANGLE)	Full Angle: 5' (1.5 m) Scoop: 4'7" (1.4 m) Full V: 5' (1.5 m)	5'4" (1.6 m)
APPROX. WEIGHT**	354 lb (160.6 kg)	261 lb (118.4 kg)
CUTTING EDGE	0.25" x 5" (0.6 cm x 12.7 cm)	0.25" x 5" (0.6 cm x 12.7 cm)
MOUNT TYPE	UTV Mounting System	UTV Mounting System

*IMPACT UTV V-Plow: For UTVs with a wider wheelbase, width can be adjusted to: 5'6" (1.7 m) full angle, 5'1" (1.6 m) scoop, 5'6" (1.7 m) full V
 **Plus vehicle mount

IMPACT™ MID-DUTY UTV



PLOW TYPE	STRAIGHT BLADE
MOLDBOARD OPTIONS	High-Strength Steel
BLADE WIDTH	Hydraulic: 5'6" (1.7 m) 6'0" (1.8 m) Winch: 5'6" (1.7 m) 6'0" (1.8 m)
BLADE HEIGHT	19.67" (50.0 cm)
BLADE THICKNESS	16 ga
TRIP SPRINGS	2
RIBS	4
LIFT CYLINDER	Hydraulic: 1.5" x 3" (one) (3.8 cm x 7.6 cm) Winch: NA
ANGLING RAMS	Hydraulic: 1.5" x 4" (one) (3.8 cm x 10.2 cm) Winch: NA
PLOWING WIDTH	Hydraulic: 4'11" (1.5 m) 5'4" (1.6 m) Winch: 4'11" (1.5 m) 5'4" (1.6 m)
APPROX. WEIGHT*	Hydraulic: 190 lb (86.2 kg) 195 lb (88.5 kg) Winch: 175 lb (79.4 kg) 180 lb (81.7 kg)
CUTTING EDGE	0.25" x 4" (0.6 cm x 10.2 cm)
MOUNT TYPE	Mid-Duty UTV Mounting System

*Weight of the vehicle mount not included

Specifications subject to change without prior notice.
 Please visit westernplows.com for the most current specifications.

SPECIFICATIONS



MANUAL ANGLE PLOWS

PLOW TYPE	STRAIGHT BLADE MANUAL ANGLE	STRAIGHT BLADE MANUAL ANGLE	V-PLOW MANUAL ANGLE
MOLDBOARD OPTIONS	Mild Steel	Mild Steel	Mild Steel
BLADE WIDTH	66" (167.6 cm)	72" (182.9 cm)	72" (182.9 cm)
BLADE HEIGHT	15.75" (40.0 cm)	15.75" (40.0 cm)	16.75" (42.6 cm)
BLADE THICKNESS	12 ga	12 ga	12 ga
TRIP SPRINGS	2	2	3
VERTICAL RIBS	4	4	4
PLOWING WIDTH (AT ANGLE)	59.75" (151.8 cm)	65.75" (167.0 cm)	67.75" (172.1 cm)
PLOW ASSEMBLY WEIGHT	80 lb (36.3 kg)	67 lb (30.4 kg)	148 lb (67.1 kg)
CUTTING EDGE	0.25"	0.25"	0.25"

PRODIGY™

PRO PLUS®



PLOW TYPE	SKID-STEER	SKID-STEER	SKID-STEER	SKID-STEER
MOLDBOARD OPTIONS	Steel	Steel	Steel	Steel
BLADE WIDTH	Scoop: 8'7" (2.6 m) Wings Pinned: 9'8" (3.0 m)	8' (2.4 m)	8'6" (2.6 m)	9' (2.7 m)
BLADE HEIGHT	29.5" (74.9 cm)	31.5" (80.0 cm)	31.5" (80.0 cm)	31.5" (80.0 cm)
BLADE THICKNESS	12 ga	12 ga	12 ga	12 ga
SHOCK ABSORBERS	Optional	2	2	2
TRIP SPRINGS	4	4	4	4
RIBS	8	8	8	8
ANGLING RAMS	1.5" x 10" (3.8 cm x 25.4 cm)	1.5" x 12" (3.8 cm x 30.5 cm)	1.5" x 12" (3.8 cm x 30.5 cm)	1.5" x 12" (3.8 cm x 30.5 cm)
PLOWING WIDTH (FULL ANGLE)	7'10" (2.4 m)	6'11" (2.1 m)	7'4" (2.2 m)	7'9" (2.4 m)
CUTTING EDGE	0.5" x 6" (1.3 cm x 15.2 cm)	0.5" x 6" (1.3 cm x 15.2 cm)	0.5" x 6" (1.3 cm x 15.2 cm)	0.5" x 6" (1.3 cm x 15.2 cm)
MOUNT TYPE	Universal Skid-Steer Mount	Universal Skid-Steer Mount	Universal Skid-Steer Mount	Universal Skid-Steer Mount

PILE DRIVER™



PLOW TYPE	PUSHER PLOW	PUSHER PLOW	PUSHER PLOW	PUSHER PLOW	PUSHER PLOW
CUTTING EDGE	Steel	Steel	Steel	Steel	Steel
MOLDBOARD OPTIONS	Steel	Steel	Steel	Steel	Steel
BLADE WIDTH	8' (2.4 m)	10' (3.1 m)	12' (3.7 m)	14' (4.3 m)	16' (4.9 m)
BLADE HEIGHT	32.5" (82.6 cm)	32.5" (82.6 cm)	40.5" (102.9 cm)	40.5" (102.9 cm)	40.5" (102.9 cm)
APPROX. WEIGHT	1012 lb (459.0 kg)	1140 lb (517.1 kg)	2128 lb (965.2 kg)	2275 lb (1031.9 kg)	2512 lb (1139.2 kg)
MACHINE APPLICATION	Skid-Steer, Wheel Loader, Backhoe, Tractor	Skid-Steer, Wheel Loader, Backhoe, Tractor	Wheel Loader, Backhoe, Tractor	Wheel Loader, Backhoe, Tractor	Wheel Loader, Backhoe, Tractor
SNOW CAPACITY	6.4 cu yd (4.9 cu m)	8 cu yd (6.1 cu m)	8.5 cu yd (6.5 cu m)	10 cu yd (7.7 cu m)	11.5 cu yd (8.8 cu m)
MOUNT TYPE	Interchangeable Attachment Plates	Interchangeable Attachment Plates	Interchangeable Attachment Plates	Interchangeable Attachment Plates	Interchangeable Attachment Plates
SKID-STEER HORSEPOWER COMPATIBILITY	45+ hp	60+ hp	—	—	—
WHEEL LOADER/BACKHOE HORSEPOWER COMPATIBILITY	60+ hp	60+ hp	70+ hp	85+ hp	100+ hp
TRACTOR HORSEPOWER COMPATIBILITY	40+ hp	50+ hp	70+ hp	85+ hp	100+ hp



0.35 Striker™



Tornado™ UTV

SPREADER TYPE	UTV	UTV
BODY SIDE LENGTH	30" (0.8 m)	64" (1.6 m)
CAPACITY	0.35 cu yd (0.3 cu m)	11.00 cu ft (0.3 cu m)
HOPPER CONSTRUCTION	16 ga SS	Polyethylene
DIMENSIONS OVERALL	57" x 38" x 46" (144.8 cm x 96.5 cm x 116.8 cm)	64" x 48.5" x 27" (162.6 cm x 123.2 cm x 68.6 cm)
APPROX. WEIGHT (EMPTY)	235 lb (106.6 kg)	280 lb (127.0 kg)
MOTORS	Dual Electric, 12V DC, Sealed	Dual Electric, 12V DC, Sealed
SPINNER SIZE	12" (30.5 cm)	12" (30.5 cm)
SPREADING WIDTH	Up to 30' (9.1 m)	Up to 30' (9.1 m)
VEHICLE APPL.	UTVs	UTVs

SPECIFICATIONS



**PRO-FLO™
525**



**LOW
PROFILE**

**LOW-PRO
300W**

SPREADER TYPE	TAILGATE	TAILGATE	TAILGATE
MODEL	525	500	300W
CAPACITY	5.25 cu ft (0.2 cu m)	5.00 cu ft (0.1 cu m)	3.00 cu ft (0.1 cu m)
HOPPER CONSTRUCTION	Polyethylene	Polyethylene	Polyethylene
DIMENSIONS OVERALL	20.50" x 38" x 34" (52.0 cm x 96.5 cm x 86.4 cm)	21" x 39" x 34" (53.3 cm x 99.1 cm x 86.4 cm)	22" x 30" x 32" (55.9 cm x 76.2 cm x 81.3 cm)
APPROX. WEIGHT (EMPTY)	160 lb with mount (72.6 kg)	75 lb with mount (34.0 kg)	68 lb with mount (30.8 kg)
MOTOR	Dual Electric, 12V, 1/3 hp	Electric, 12V, 1/3 hp	Electric, 12V, 1/3 hp
AUGER (DIA. x LENGTH)	3" x 14" Heavy-Duty Solid Steel (7.3 cm x 35.6 cm)	2.63" x 6" (6.7 cm x 15.2 cm)	2.50" x 5.75" Vertical High-Flow (6.4 cm x 14.6 cm)
SPINNER SIZE	10" (25.4 cm)	10" (25.4 cm)	10" (25.4 cm)
SPREADING WIDTH	Up to 30' (9.1 m)	Up to 30' (9.1 m)	Up to 25' (7.6 m)
VEHICLE APPLICATION	Tractors, SUVs, 1-Ton or Smaller Pickups	Vehicles with Class III Hitch	Tractors, UTVs, SUVs, 1-Ton or Smaller Pickups
AVAILABLE MOUNTS	Standard 2" Receiver, 3-Point Combo Mount	Standard Class III 2" Receiver Hitch Mount	Standard 2" Receiver, Optional Utility Mount, Drop Utility Mount, Trailer Mount, 3-Point Mount



STORAGE CONTAINERS

	STORAGE	STORAGE	STORAGE	STORAGE
MODEL NUMBER	74069	74071	74073	74075
MATERIAL CAPACITY	3 cu ft (0.1 cu m)	6 cu ft (0.2 cu m)	12 cu ft (0.3 cu m)	18 cu ft (0.5 cu m)
EMPTY WEIGHT	19 lb (8.6 kg)	35.5 lb (16.1 kg)	50.5 lb (22.9 kg)	58 lb (26.3 kg)
OVERALL LENGTH	33" (83.8 cm)	48" (121.9 cm)	48" (121.9 cm)	48" (121.9 cm)
OVERALL WIDTH	22.75" (57.8 cm)	33.25" (84.5 cm)	33.25" (84.5 cm)	33.25" (84.5 cm)
OVERALL HEIGHT	17.4" (44.2 cm)	20.75" (52.7 cm)	27.75" (70.5 cm)	35.75" (90.8 cm)
FORK POCKETS	No	Yes	Yes	Yes



DROP™ 250 DROP™ 600

SPREADER TYPE	TAILGATE	TAILGATE
MODEL	250	600
APPROX. WEIGHT (EMPTY)	130 lb (59.0 kg)	160 lb (72.6 kg)
OVERALL LENGTH	17" (43.2 cm)	20" (50.8 cm)
OVERALL HEIGHT	17.5" (44.5 cm)	28" (71.1 cm)
OVERALL WIDTH	42" (106.7 cm)	42" (106.7 cm)
HOPPER LENGTH	13" (33.0 cm)	17" (43.2 cm)
HOPPER WIDTH	36.5" (92.7 cm)	36.5" (92.7 cm)
CAPACITY (VOLUME)	2.5 cu ft (0.1 cu m)	6.0 cu ft (0.2 cu m)
CAPACITY (WEIGHT)	350 lb (158.8 kg)	650 lb (294.8 kg)
SPREADING WIDTH	30"-36" (76.2 cm-91.4 cm)	30"-36" (76.2 cm-91.4 cm)
FRAME	201 SS	201 SS
HOPPER	201 SS	201 SS
MOTORS	1/3 hp	1/3 hp
AUGER DRIVE ASSEMBLY	201 SS	201 SS
MOUNTING	3-pt Hitch, 2" Hitch Receiver, or In-Bed Mount	3-pt Hitch, 2" Hitch Receiver, or In-Bed Mount

SS = Stainless Steel
MS = Mild Steel



WB-160D WB-100B

SPREADER TYPE	DROP	BROADCAST
CAPACITY	160 lb (72.6 kg)	100 lb (45.4 kg)
HOPPER CONSTRUCTION	Polyethylene	Polyethylene
DIMENSIONS OVERALL	48" x 38.25" x 36" (121.9 cm x 97.2 cm x 91.4 cm)	50" x 26" x 28" (127.0 cm x 66.0 cm x 71.1 cm)
APPROX. WEIGHT (EMPTY)	55 lb (25.0 kg)	25 lb (11.3 kg)
SPINNER SIZE	—	10" (25.4 cm)
SPREADING WIDTH	3' (0.9 m)	Up to 20' (6.0 m)



RB-400

PLOW TYPE	WALK-BEHIND ROTARY BROOM
EMPTY WEIGHT	238 lb (108.0 kg)
OVERALL DIMENSIONS (L x W x H)	Without Blade: 72" x 40" x 42.5" (182.9 cm x 101.6 cm x 108.0 cm) With Blade: 80" x 40" x 42.5" (203.2 cm x 101.6 cm x 108.0 cm)
SPEED	Up to 2.7 mph (4.3 km/h)
FORWARD GEARS	3
REVERSE GEARS	1
BRUSH PRESSURE ADJUSTMENT	Yes
ADJUSTABLE HANDLE HEIGHT	7 Positions
ENGINE	Honda® GXV 160 OHV
TIRES	Polar Trec Snow Tires
SNOW BLADE WIDTH	Wide: 40" (101.6 cm) Angled: 37" (94.0 cm)
BRUSH DIAMETER	16" (40.6 cm)
BRUSH WIDTH	40" (101.6 cm)
FUEL CAPACITY	0.5 gal (1.9 L)



SS-120

SPREADER TYPE	SPRAYER
MODEL	SS-120
EMPTY WEIGHT	60 lb (27.2 kg)
DIMENSIONS OVERALL	48" x 28" x 33" (121.9 cm x 71.1 cm x 83.8 cm)
CAPACITY	12 gal (45.4 L)
SPRAYING WIDTH	Up to 48" (121.9 cm)
SPRAYING VOLUME	1 gal/min (3.8 L/min)
FRAME	Powder Coated Steel
TANK	One-Piece LLDPE
MOTORS	12-Volt, Direct-Drive Pump



TWO WINTER  WARRANTY

Western Products | P.O. Box 245038 | Milwaukee, WI 53224-9538

westernplows.com



Western Products reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Western Products or the vehicle manufacturer may require or recommend optional equipment for snow removal. Do not exceed vehicle ratings with a snowplow. This product is manufactured under the following US patents: 3,653,163; 7,134,227; 7,400,058; 7,540,436; 7,737,576; 8,850,724; 9,200,418; 9,033,265; 9,271,441; 9,822,563; 10,793,056; CAN patents: 2,466,195; 2,843,990; and other patents pending. Western Products offers a limited warranty for all snowplows and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: CONTRACTOR GRADE®, Drop™ 250, Drop™ 600, FLEX ARM™, IMPACT™, MVP 3™, MVP PLUS™, PILE DRIVER™, PRO-FLO™ 525, PRO-PLOW® Series 2, PRO PLUS®, PRODIGY™, Striker™, Sway-Frame™, Tornado™ UTV, UltraMount® 2, WESTERN®, and WIDE-OUT™.

©2021 Douglas Dynamics, LLC
All rights reserved.

 A DIVISION OF DOUGLAS DYNAMICS, LLC

Printed in U.S.A.
Form No. 79311 – SEPT21