

JBS COMBINATION TRAILER



The JBS Combination Trailer is a front runner in the industry; this fully welded heavy duty trailer easily switches from a manure spreader to a forage trailer. The wall height for forage is 8 feet while the wall height for manure is 4 feet. It is ideal for long hauls getting to the field, and helps to reduce the amount of equipment you need. It comes standard with a Vertimax, with twin vertical augers and a hydraulic guillotine gate. The combination trailer can spread up to 60 feet and handle all manure types and other materials. With the capacity of the JBS Combination Trailer you will no longer need to stock pile manure in the field to spread.

- 5/8" Auger flights
- Reversible cutters
- Low Friction 1/2" UHMW floor
- Long lasting phenolic rear shaft bearings
- 3 sets of WR78 floor chain with tubing cross slats
- 2 - 7/16" rear shaft turned by Heco planetary drives
- Duplex #80 drive chains
- Sauer Dan Foss hydraulic motors
- 2' mesh bulk head
- Spinner cowling
- Steel idler sprocket with bronze bushings
- Enclosed large bearings on top of beaters
- 1/4 angle 6" on center floor cross members
- 25,000# heavy wall axles
- ABS controlled brakes
- DOT certified

- LED lighting
- Removable bumper
- Landing gear

CONTROLS & HYDRAULICS


- In cab JBS controller with ground speed feed rate control come with GPS antenna
- Load sensing hydraulic piston pump
- Aluminum hydraulic reservoir
- Bent axis piston motor with 5,000 psi rating for driving beater gearboxes
- Zero hydraulic contamination as it remains with the trailer when uncoupling the beaters
- Beater controlled separate from PTO enabling you to start and stop beaters without having to turn off the PTO
- Hydraulic oil cooler with dual fans
- Proportional controls mounted in dry clean aluminum enclosure

OPTIONS

- Hurricane Attachment
- Paint color and decal packages
- Multiple tire options
- Wall extensions
- Lift axles/ number of axles
- Barn door or swing tailgate
- Vertical beater kick out for easy clean out
- Hardox 5/8 vertical beaters



JBS COMBINATION TRAILER

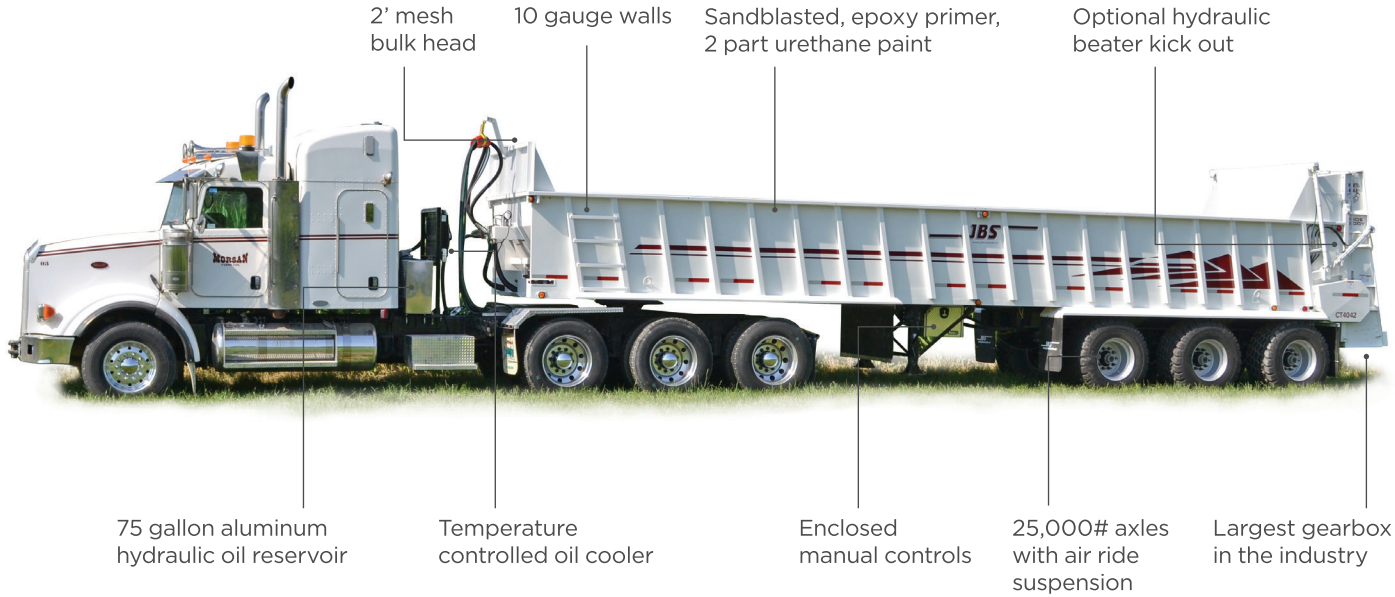

MODEL:	CT3048	CT3248	CT3448	CT3648	CT4048
AXLE	Tandem	Tandem	Tandem	Tandem/Tridem	Tandem/Tridem
SUSPENSION CAPACITY	50,000 lbs	50,000 lbs	50,000 lbs	75,000 lbs	75,000 lbs
LEVEL CAPACITY (FORAGE)	1,125 ft ³	1,920 ft ³	2,040 ft ³	2,160 ft ³	2,400 ft ³
HEAPED CAPACITY (FORAGE)	2,025 ft ³	2,160 ft ³	2,295 ft ³	2,430 ft ³	2,700 ft ³
LEVEL CAPACITY (MANURE)	900 ft ³	960 ft ³	1,020 ft ³	1,080 ft ³	1,200 ft ³
HEAPED CAPACITY (MANURE)	1,125 ft ³	1,200 ft ³	1,275 ft ³	1,350 ft ³	1,500 ft ³



One simple, clean bulkhead for all air, hydraulic and power hook ups



Duplex #80 chain for floor drive



5,000 psi bent axis motor



removable bumper, 5/8" beater fighting, 3 sets of wr78 floor chain w/rectangular tube cross slats

This machine is designed for off-road agricultural use only. For other applications, please contact J. Bond & Sons Ltd. J. Bond & Sons Ltd. reserves the right to improve or modify our product without notice or obligation.

AUTHORIZED DEALER