

ROVICAR ⁺

Multifunction motorized cart

- Much more than a simple feeding cart
- Meets CE regulations
- Reliable and heavy duty conception
- Powerful hydraulic system
- Tub capacity from 45 to 120 cu.ft. (1274 to 3398 litres) depending on the model selected among the seven proposed sizes
- Available in powder coated finish or stainless steel (optional)
- TOP OF THE LINE design for feeding, mulching, and even clean alleys!




Rovicar is built to order according to the needs of the individual dairy producer. Certain features are offered as options. Features, specifications and dimensions are subject to change without notice.

Available options

Front loader

Allows to load :

- Hay bales Ø of 36" – 915mm
- Wood shavings, sawdust
- Mixed recipe
- Outstanding lifting capacity of 495lbs – 225kg on bucket end
- Easy to operate – hydraulic operation with level handle

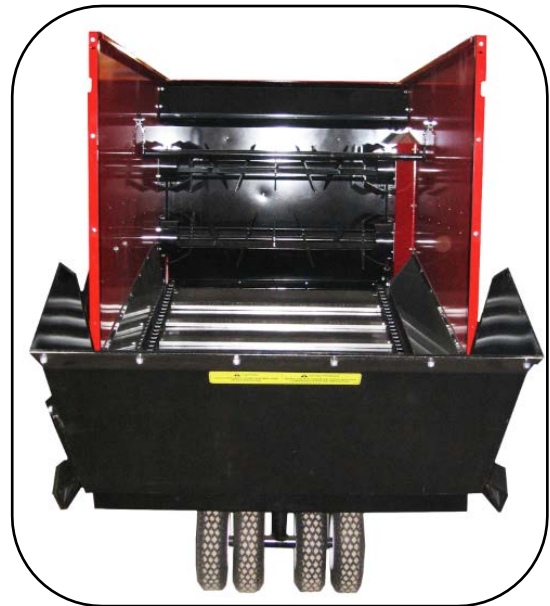

Side spreader

Allows to spread :

- Chopped hay
- Wood shavings, sawdust
- Mixed recipe
- Retractable easy use system
- Reel operated by hydraulic system, variable adjustable speed for accurate distribution



Side brush

To clean floor & surfaces such as:

- Stall, alleys , etc...

Particularities :

- Retractable easy use system
- Ø 15" – 380mm base
- Rotation at 300RPM



Front brush

To clean floor & surfaces such as:

- Stall, alleys , etc...


Particularities :

- Retractable easy use system
- Base matching Rovicar width
- Double action rotation operation offered in option
- Average rotation at 20 RPM



Apron

- Galvanized mechanism
- Easy maintenance drive chains
- Variable speed apron in option

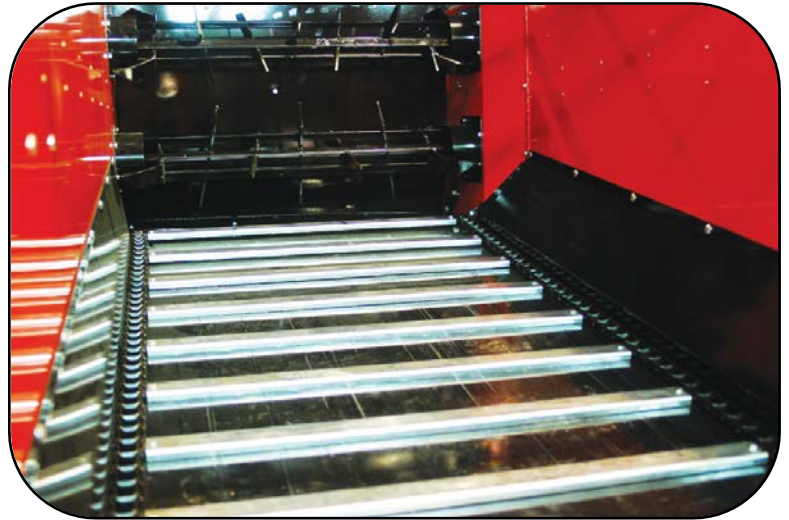


Wheels

- Individual hydraulic motor installed on each wheel with hydraulic pump


Choices offered :

- 2 standard front wheels on 4530-5636
- 4 wheels in option on 4530-5636
- 4 standard wheels on 5642-7042-9542-12048
- Anti-puncture tires optional
- Oversized wheels offered in option (high rised Rovicar) available on 5636-7036-7042

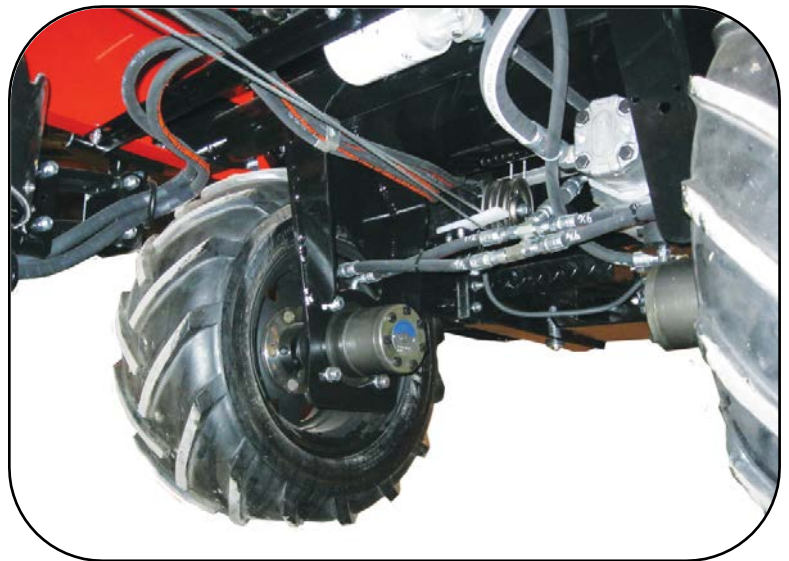

Fiber separator


- Equipped with debit regulator
- Allows mixing and/or ensure uniform spreading
- High debit discharge auger for effective and even distribution

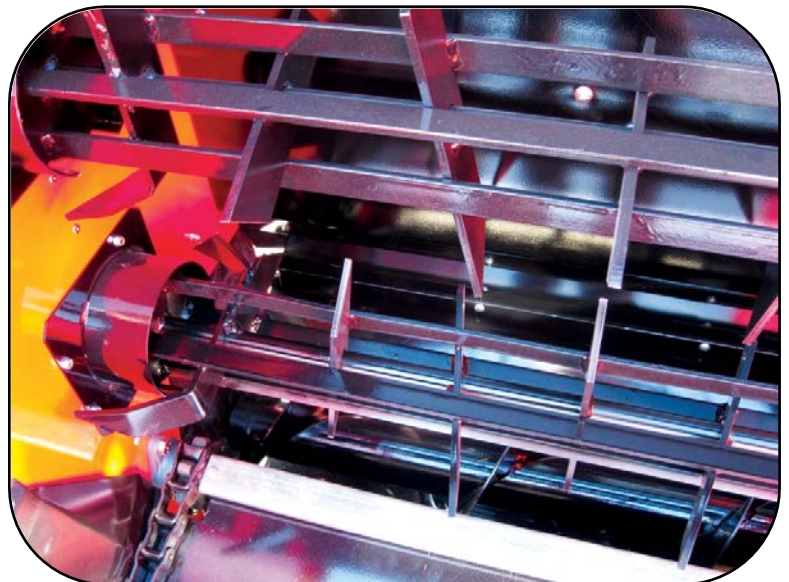

Specification chart

					A		B		C			
Model	Motor	Tub capacity			Overall length		Overall width		Height **		Tare weight***	
	HP	ft3	m3	Kg *	in***	mm***	in***	mm***	in	mm	Pnd	Kg
RC 4530 [†]	9	45	1.28	374	94	2388	36	914	67	1702	1100	499
RC 5636	9	56	1.6	465	94	2388	42	1067	67	1702	1250	567
RC 5642	9	65	1.85	540	94	2388	48	1219	67	1702	1400	635
RC 7036	9	70	2	581	104	2642	42	1067	67	1702	1300	590
RC 7042	9	82	2.34	681	104	2642	48	1219	67	1702	1450	658
RC 9542	13	95	2.71	789	120	3048	48	1219	67	1702	1600	726
RC12048	13	120	3.43	996	120	3048	54	1372	67	1702	1750	794

Clearance required chart 90° turns

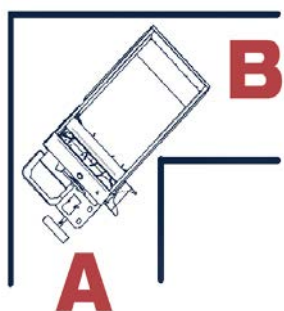

Model	A		B	
	In	mm	In	mm
RC 4530	67	1700	50	1270
RC 5636	77	1960	60	1520
RC 5642	77	1960	67	1700
RC 7036	83	2110	60	1520
RC 7042	83	2110	67	1700
RC 9542	95	2410	67	1700
RC12048	95	2410	85	2160