

**RITEWAY** 

**LAND  
ROLLER  
SERIES**

# LAND ROLLERS

LAND ROLLER SERIES



**RITEWAY** 

## LAND ROLLER SERIES

### READY TO ROLL.

Harvest your crops worry free. Promote even germination. Crush crop residue. The Land Roller series applies uniform weight and surface contact across your fields, pushing rocks into the ground and leveling out clumps. The resulting smooth surface provides even germination, faster spraying, robust crops, and a trouble-free harvest.



## LAND ROLLER FEATURES

### 1 - Large Diameter Drums.

Larger drums provide an ideal combination of weight and size to smooth the field without compaction.

### 2 - FORWARD™ Unfolding System.

The patented unfolding system goes from transport to field mode in minutes while moving forward.

### 3 - Shorter Drum Segments.

Each drum floats independently, applying consistent ground pressure and following the contours of your land.

### 4 - Pull Equipment in Tandem.

The FORWARD™ Unfolding System allows you to pull two or more pieces of equipment in tandem, so you can work faster.

### LEVEL THE FIELD.

NO TWO ACRES ARE THE SAME.



Short drum sections float independently, ensuring you roll every inch of your land evenly, regardless of topography.

### STANDARD EQUIPMENT:


- Patented FORWARD™ unfolding system
- Auto-fold hydraulic wing lock
- Adjustable hitch height c/w perfect hitch clevis
- Dual wing transport tires
- Over-center wing lockups
- Triple Lip Seal Bearings
- Large diameter drum with premium heavy wall:  
- 42" diameter; 0.50" wall thickness (1067mm x 13mm)
- Heavy Duty Centre Frame:  
- 8" x 6" x 0.250" (200 mm x 150 mm x 6 mm)
- Heavy Duty Wing Frame  
- 6" x 4" x 0.250" (150 mm x 100 mm x 6 mm)
- Taper lock replaceable drum shafts
- Wing tie bar (F5 & F7)
- Safety Chains
- Light Package

### OPTIONAL EQUIPMENT:

- Acre Meter
- Wing Tie Bar (F3)
- Mud Scraper Kit
- 5/8" drums  
- 42" diameter; 0.65" wall thickness

### BUILT STRONG

HEIEST ROLLERS ON THE MARKET.

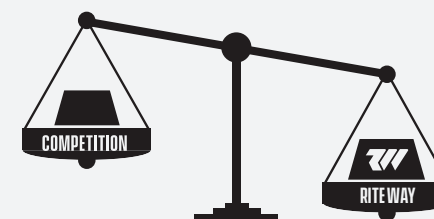

Pair that with the heaviest, most durable frame, and you have years of dependable service.



### EASY TO TRANSPORT

F3, F5, and F7 rollers fold to 14 feet wide for easy transport. The F3-NT model folds to a mere 12 feet, making tight quarters and maneuvering a breeze.



### F-3



32' - 52' WIDE | 17,640 - 24,400 LBS

### F-5



46' - 84' WIDE | 23,000 - 40,320 LBS

### F-7



65' - 89' WIDE | 32,500 - 41,190 LBS



**SEE RITE WAY LAND ROLLERS IN ACTION.** Search Rite Way Mfg on Youtube to see how Rite Way Land Rollers make short work of rocks, rootballs and debris in your fields.



# MADE TO WORK. BUILT TO LAST.

Short or long, and designed to shape to your field, the Rite Way Land Rollers prepare your land for optimum performance. Customize your equipment to be as aggressive as you need with a field-proven design and a range of sizes and working width options.

## SPECIFICATIONS:

<b>F-3</b>						
MODEL	WORKING WIDTH	WING CONFIGURATION	TRANSPORT LENGTH	TRANSPORT WIDTH	WEIGHT 1/2" DRUM	WEIGHT 5/8" DRUM
F3-32	32' (9.8 m)	10'-12'-10' (3.1 m-3.6 m-3.1 m)	38' (11.6 m)	14' (4.3 m)	17,640 lbs (8,100 kg)	19,560 lbs
F3-36	36' (11.0 m)	12'-12'-12' (3.6 m-3.6 m-3.6 m)	40' (12.2 m)	14' (4.3 m)	19,000 lbs (8,618 kg)	21,160 lbs
F3-42	42' (12.8 m)	15'-12'-15' (4.5 m-3.6 m-4.5 m)	45' (13.7 m)	14' (4.3 m)	21,220 lbs (9,625 kg)	23,740 lbs
F3-46	46' (14.1 m)	17'-12'-17' (5.2 m-3.6 m-5.2 m)	47' (14.3 m)	14' (4.3 m)	22,910 lbs (10,391 kg)	25,670 lbs
F3-52	52' (15.8 m)	20'-12'-20' (6.1 m-3.6 m-6.1 m)	50' (15.2 m)	14' (4.3 m)	24,400 lbs (11,067 kg)	27,520 lbs
F3-40 NT	40' (12.2 m)	15'-10'-15' (4.5 m-3.1 m-4.5 m)	45' (13.7 m)	12' (3.7 m)	20,600 lbs (9,344 kg)	23,000 lbs
F3-50 NT	50' (15.2 m)	20'-10'-20' (6.1 m-3.6 m-6.1 m)	50' (15.2 m)	12' (3.7 m)	23,100 lbs (10,478 kg)	26,100 lbs

<b>F-5</b>						
MODEL	WORKING WIDTH	WING CONFIGURATION	TRANSPORT LENGTH	TRANSPORT WIDTH	WEIGHT 1/2" DRUM	WEIGHT 5/8" DRUM
F5-46	46' (14 m)	8'-8'-12'-8'-8' (2.4 m-2.4 m-3.6 m-2.4 m-2.4 m)	47' 4" (14.4 m)	14' (4.3 m)	23,000 lbs (10,432 kg)	25,640 lbs
F5-46	50' (14.4 m)	10'-8'-12'-8'-10' (3.1 m-2.4 m-3.6 m-2.4 m-3.1 m)	49' 4" (15.0 m)	14' (4.3 m)	24,800 lbs (11,249 kg)	27,680 lbs
F5-54	54' (16.4 m)	10'-10'-12'-10'-10' (3.1 m-3.1 m-3.6 m-3.1 m-3.1 m)	51' 4" (15.6 m)	14' (4.3 m)	26,490 lbs (12,016 kg)	29,610 lbs
F5-58	56' (17.7 m)	12'-10'-12'-10'-12' (3.6 m-3.1 m-3.6 m-3.1 m-3.6 m)	53' 4" (16.2 m)	14' (4.3 m)	28,478 lbs (12,917 kg)	31,838 lbs
F5-62	62' (18.9 m)	12'-12'-12'-12'-12' (3.6 m-3.6 m-3.6 m-3.6 m-3.6 m)	55' 4" (16.9 m)	14' (4.3 m)	30,250 lbs (13,721 kg)	33,850 lbs
F5-68	68' 4" (20.8 m)	12'-15'-12'-15'-12' (3.6 m-4.5 m-3.6 m-4.5 m-3.6 m)	61' 6" (18.7 m)	14' (4.3 m)	32,620 lbs (14,796 kg)	36,580 lbs
F5-74	74' (22.5 m)	15'-15'-12'-15'-15' (4.5 m-4.5 m-3.6 m-4.5 m-4.5 m)	64' 6" (19.7 m)	14' (4.3 m)	35,520 lbs (16,112 kg)	—
F5-78	78' (23.7 m)	17'-15'-12'-15'-17' (5.2 m-4.5 m-3.6 m-4.5 m-5.2 m)	66' 6" (20.3 m)	14' (4.3 m)	37,440 lbs (16,982 kg)	—
F5-84	84' (25.6 m)	20'-15'-12'-15'-20' (6.1 m-4.5 m-3.6 m-4.5 m-6.1 m)	69' 6" (21.2 m)	14' (4.3 m)	40,320 lbs (18,289 kg)	—

<b>F-7</b>					
MODEL	WORKING WIDTH	WING CONFIGURATION	TRANSPORT LENGTH	TRANSPORT WIDTH	WEIGHT 1/2" DRUM
F7-65	65' (19.8 m)	8'-8'-8'-12'-8'-8'-8' (2.4 m-2.4 m-2.4 m-3.6 m-2.4 m-2.4 m-2.4 m)	59' 8" (18.2 m)	14' (4.3 m)	32,500 lbs (32,500 kg)
F7-69	69' (21.0 m)	10'-8'-8'-12'-8'-8'-10' (3.1 m-2.4 m-2.4 m-3.6 m-2.4 m-2.4 m-3.1 m)	61' 8" (18.2 m)	14' (4.3 m)	33,740 lbs (15,304 kg)
F7-73	73' (22.3 m)	10'-10'-8'-12'-8'-10'-10' (3.1 m-3.1 m-2.4 m-3.6 m-2.4 m-3.1 m-3.1 m)	62' 6" (19.0 m)	14' (4.3 m)	35,040 lbs (15,894 kg)
F7-77	77' (23.5 m)	12'-10'-8'-12'-8'-10'-12' (3.6 m-3.1 m-2.4 m-3.6 m-2.4 m-3.1 m-3.6 m)	65' 8" (20.0 m)	14' (4.3 m)	36,960 lbs (16,765 kg)
F7-81	81' (26.7 m)	12'-10'-10'-12'-10'-10'-12' (3.6 m-3.1 m-3.1 m-3.6 m-3.1 m-3.1 m-3.6 m)	67' 8" (20.6 m)	14' (4.3 m)	38,718 lbs (17,562 kg)
F7-85	85' (25.9 m)	12'-12'-10'-12'-10'-12'-12' (3.6 m-3.6 m-3.1 m-3.6 m-3.1 m-3.6 m-3.6 m)	69' 8" (21.2 m)	14' (4.3 m)	39,950 lbs (18,121 kg)
F7-89	89' (27.1 m)	12'-12'-12'-12'-12'-12'-12' (3.6 m-3.6 m-3.6 m-3.6 m-3.6 m-3.6 m-3.6 m)	71' 8" (21.8 m)	14' (4.3 m)	41,190 lbs (18,683 kg)

<b>TIRES</b>		
MODEL	MAIN FRAME	WING AXLE
F3-32 to F3-42	11L x 15-12 ply	11L x 15-12 ply
F3-46 to F3-52	12.5L x 15-12 ply	12.5L x 15-12 ply
F3-40 NT	11L x 15-12 ply	11L x 15-12 ply
F3-50 NT	12.5L x 15-12 ply	12.5L x 15-12 ply
F5-46 to F5-58	12.5L x 15-12 ply	12.5L x 15-12 ply
F5-62 to F5-84	380/55R16.5	12.5L x 15-12 ply
F7	380/55R16.5	12.5L x 15-12 ply
<b>**TRUCK TIRES AVAILABLE UPON REQUEST</b>		

We are continuously improving our products. Design, specifications, and material are subject to change without notice.

For more information on the Land Roller Series or other land improvement equipment, visit your local Rite Way equipment dealer, or visit [www.RiteWayMfg.com](http://www.RiteWayMfg.com)

Toll free: 1-800-352-8822  /RiteWayMfg  @RiteWayMfgCo

