


THE ULTIMATE IN CROP CARE PRECISION AND PRODUCTIVITY.

TerraGator





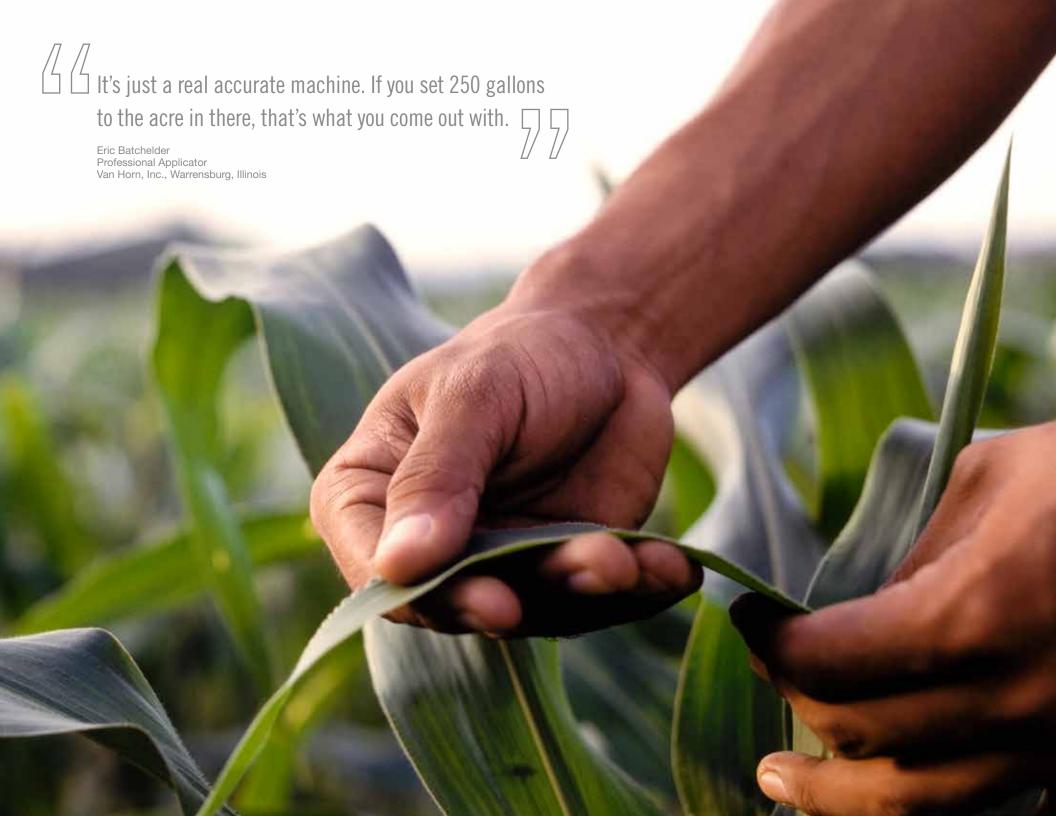

IT'S ALL ABOUT THE AGRONOMICS.

At the end of the day, what matters is a healthy plant, a healthy field and a healthy pasture that will lead to a healthy return on investment. For five decades, TerraGator has helped make that expectation a reality with high-capacity equipment that's fast, reliable and exceptionally accurate. It also has the technology and versatility to run both liquid and dry systems for any crop, in any terrain or climate — more precisely and efficiently than ever before.

NEW TECHNOLOGIES, NEW SOLUTIONS Multi-hybrid planting. Split applications of nutrients during the season. Remote sensing of plant health. New agronomic technology and methods are changing the landscape of crop and forage production and placing new demands on nutrient programs to support it.

The new TerraGator C Series is designed to deliver:

- The ultimate flexibility for owners and operators who use both dry and liquid systems to meet a wide range of agronomic needs.
- The most accurate blend, rate and placement control of any professional application equipment, liquid or dry. Apply prescriptions with precision for optimum yields and plant safety.
- The exclusive ability for "one and done." Apply up to six products at variable rates in only one pass for accurate, efficient delivery that minimizes compaction and soil disturbance.

PRECISION IS A MUST Not only are precise blends, rates and placement essential when filling nutrient prescriptions in crop production zones, but soil and water stewardship also demands even closer adherence to the 4Rs during application.

With the TerraGator C Series:

- Apply the right product, at the right rate, at the right time, in the right place — with optimum accuracy and uniformity.
- Features like additional liquid boom sections and new section control with dry spinners/spreaders enable even more precise application.
- New cameras, tank-level readouts at the reload center and touch-screen technology in the cab increase accuracy and let the operator focus attention on a quality application.

With the new TerraGator 9300C, the CVT transmission and cycle time let you outline a field way faster, because you don't have to stop, pull it out of gear, put it in gear. It's definitely the best thing I've ever run.

Scott Melvin Professional Applicator Sun Ag Inc., El Paso, Illinois

BUILT TO GROW YOUR BOTTOM LINE.

Since the beginning, TerraGator has produced self-propelled application equipment that has introduced the latest in technologies — not technology for its own sake, but new tools that improve ROI for your operation as a whole. Investment in the new C Series models will pay off with increased application precision, reliability, comfort and productivity.

MAXIMIZE PRODUCTIVITY

Time is money, especially when you have to hit a narrow application window and the weather is not on your side. You need high-capacity applicators that can carry the maximum load while running fast, day-in and day-out, with maximum uptime.

- From high ground speeds to improved mixing and reload speeds, the TerraGator C Series delivers optimum productivity with more power, more systems and more experience than any other floater.
- With the choice of three power levels in four models, match horsepower and capacity to the needs of your operation.
- Choose the ideal TerraGator for your fields: the light-treading three-wheel configuration to avoid double run-over and rutting, or the flotation and advanced stability of four wheels.

- Switch systems quickly and with ease, with electrical connectors on the side of the chassis for easy access and protection from potential corrosion.
- Upgraded components like bigger boom pins and full-breakaway booms mean longer life and even more uptime for these reliable machines.
- Be at-speed and on-rate in the field more easily with multiple cruise speed settings, RPM management and no shifting.



BETTER OPERATOR EXPERIENCE

Machines don't run themselves — the human factors of safety, comfort and ease of operation are of critical importance to precise application and a successful business. The new features of the TerraGator C Series help operators focus on the most important aspects of the job with fewer manual operations, more comfort and less fatigue.

- The updated TerraGator C Series cab and controls provide superior comfort and ease of operation, with improved visibility and automation for increased accuracy and improved ergonomics.
- The only air-ride cab in its class is now even better, with an updated seat suspension and cab motion that is fully unencumbered by hood mounting. On three-wheel models, the cab position is set far back from the front wheel to ensure the best-in-class ride and operator experience.
- Fleet operations gain staffing flexibility and training efficiencies now that the TerraGator C Series and the RoGator C Series share an intuitive, common interface and cab set-up.

PERFORMANCE THAT PAYS

Speed, capacity and accuracy — the TerraGator C Series delivers them all so efficiently that it multiplies the return on your investment. All models are engineered to operate at peak efficiency with more power to the ground, excellent fuel efficiency, fewer service calls and reduced downtime.

- The rugged, updated AGCO Power™ engine and drive system are built specifically for off-road vehicles and are precision-balanced for less vibration and longer engine life.
- The new series is configured to increase the throughput from the transmission, delivering more power to the ground in the three higher horsepower models.
- Operators are given full error-code descriptions on the AccuTerminal® screen for faster on-site troubleshooting.
- With AgCommand® Advanced Plus subscription, remote terminal viewing enables operator assistance and remote troubleshooting before, or possibly instead of, a service trip. Prevent downtime, and efficiently get and keep machines running.



The cab on the TerraGator C Series puts you in a comfortable environment with controls at your fingertips and a clear view of important machine functions. It just makes sense, and makes accurate application that much easier.

BETTER VISIBILITY AND CONVENIENCE

- Automatic rearview/roading camera displays on the new, user-friendly AccuTerminal; optional additional video monitor and up to six cameras to mount in product bins or elsewhere.
- Power mirrors are adjustable on the fly, from the cab — no more two-person manual mirror-adjusting sessions.
- Electronic product level sensors in the center
 of the liquid tank give more precise digital readouts
 in both the cab and at the reload station, replacing
 the guesswork of reading sight gauges.
- The liquid boom stops have been moved out of view for better forward visibility.

ADVANCED FEATURES AND ERGONOMICS

- Comfortable, floating ergonomic armrest with the AccuTerminal, multifunction joystick and keypad each in its natural place.
- Touch terminal with intuitive interface.
- AccuCruise[™] allows a smooth transition between speeds for application and turning, simply with the press of a button, and can be adjusted at any time for the right fit in the right field.
- Shuttle shift: With a simple joystick command, the TerraGator C Series reverses direction at a preset speed while you focus on watching where you're going.
- Lighting shutdown delay: TerraGators even work for you with lights to help show you the way after a long day on the job.





HIGH TECH FOR HIGH PRODUCTIVITY.

The TerraGator C Series puts industry-leading application capabilities in your control, so you can deliver the best crop care possible. With functions controlled through the AGCO AccuTerminal and Raven® Viper 4+ field computer, everything is at your fingertips.



PRODUCT CONTROL Raven product control is standard and easy to equip, with options for your new TerraGator C Series machines with the fully compatible Raven Viper® 4+ field computer to manage rate and section control with AccuBoom™, boom height with AutoBoom, and to be compatible with other Raven steering and data transfer solutions for a seamless fit into a fleet.

- Horizontal or vertical orientation
- Sleek design with 12.1" responsive touchscreen and intuitive, tablet-like interface and state-of-the-art rugged magnesium alloy enclosure
- Dustproof for tough environments
- 4 camera inputs for monitoring bin levels, blind spots, roadway operation and more
- Customizable user interface

- Set up machine and product profiles
- ISOBUS compatible
- Wireless over-the-air software updates
- · Wireless data transfer capability
- VT with task controller capabilities
- On-screen implement location with section status



MORE CONTROL IN ONE PLACE

The 10.4-inch AccuTerminal has an intuitive touch screen that lets you easily maneuver through functions, viewed one at a time or up to four different ones simultaneously. Control engine, transmission, hydraulic and system maintenance, plus the options you choose for guidance and boom-height control.



GUIDANCE The new Challenger
Auto-Guide™ guidance system allows
you to acquire waylines and steer accurately,
even in difficult reception conditions. Or
choose guidance-ready for Raven RS1
steering on the Viper 4, through your
AGCO dealer.



MAP SETTINGS The AccuTerminal map can be viewed in a quarter, half or full screen with access to multiple menus on the right side for controlling obstacles, boundaries, waylines, nudge, section control and more.



HEADLAND MANAGEMENT With AccuField Command[™] headland management, activate automated operating sequences at headlands with the touch of a button.



FUSE AGRO-LINK

AGCO's Fuse Agro-Link™ streamlines the collection of as-applied, as-planted and yield files, facilitates the transfer of prescription files to equipment in the field, and centrally organizes and shares files so you can focus on what you do best.



• Web-based mobile app that facilitates the movement and sharing of agronomic information for growers and agronomy service providers.



- Connects you with your trusted advisors to share information more efficiently.
- Move data between your cloud storage, equipment telematics systems and any farm management information system (FMIS).



- Desktop, laptop, iPhone, or iPad access
- Delivers the right file for the machine with accurate conversions between common file types.



 Move files to older equipment with the app and iXpand device (shown at right).



Visit www.agcotechnologies.com/agro-link to learn more.





PERFECT BALANCE OF STRENGTH, AGILITY, RIDE

The chassis supporting the trio of three-wheelers in the TerraGator C Series is built exclusively for ag use and features single-length, horizontal frame rails made from high-grade, low-alloy steel. This one-piece design reduces metal stress, allowing the frame to smoothly flex over rough, uneven terrain so you can put the product where it belongs, with high reliability and low total cost of ownership.

- Freewheeling front axle design has a rated capacity of 14,000 pounds, while the three-degree canted front fork provides a 45-foot turning radius, so you can easily turn within any spread pattern, with less ground disturbance.
- Rear axle carries the largest payload in the business and is equipped with air cam-actuated drum brakes that adjust to maintain proper brake setting and reduce maintenance.
- Frame rails are 4 in. x 12 in. (10.16 cm x 30.48 cm) beams that are induction-heated, pressurized and formed wider at the engine compartment to maintain strength and resist cracks.
- Designed with mid-frame cab placement and a wheelbase among the longest in the industry, for a superior ride.



SMOOTH, STABLE, PRECISE — WHEREVER YOU GO

You've got to get the product placed accurately no matter how hilly or uneven the terrain, and you'd like to do it with a comfortable ride. With four wheels and the longest wheelbase in its class (201 in./510.4 cm), the TG8400C chassis is built exclusively for off-road ag use to provide the stability, strength and balanced ride you need and deserve.

- Single-length, double C-channel horizontal frame rails in one-piece design reduce metal stress, so the frame flexes smoothly over rough, uneven terrain. This reduces wheel slip in soft fields and provides superior traction in rolling terrain.
- Super-rugged, off-road, wide-track axles are designed for use with high-flotation tires, keeping soil compaction at a minimum even with industry-leading 42,000-pound (19,050-kg) rated capacity.
- The reliably smoother ride of four-wheel TerraGators has reduced the
 effect of rough fields on your machine, systems and booms for more
 than three decades. Plus, the operator stays fresher after a long day
 in the field, meaning better efficiency and accuracy.

MORE SYSTEM CHOICES THAN ANY OTHER FLOATER.

With the top-of-the-line liquid, dry pneumatic and dry spinner systems offered with the TerraGator C Series, you know you will always have the right equipment to fit virtually every farm, every field, every climate and every growing trend.



THE TERRAGATOR C SERIES LIQUID SYSTEM

Robust, full-featured booms combine with the new reload station to give you control, confidence and convenience when applying liquid products. With the TerraGator C Series liquid system, you have:

EVEN BETTER BOOMS AND SECTION CONTROL

- Gain more precision with an increase in the number of sections over previous models to a total of seven sections, resulting in less overlap and less wasted product.
- A rugged boom tree with hydraulically adjustable boom height, full-boom breakaway with hydraulic cylinder return and 4x4 tube construction for greater durability.
- Enhanced booms with 27% larger 1.75-inch boom pins, wider inner-boom cross-section and structural members, and enhanced mid-boom fold and tip breakaway structures for reliability day after day.
- Faster fold speed with soft landing, capability for independent left/right folding and new boom stops positioned out of the operator's forward view.

- Options to enhance productivity and lighten the work of managing the booms, such as automatic boom height control from Raven or NORAC, and one-touch automatic boom folding at the press of a button.
- Optional product recovery easily empties the system plumbing, manifolds and booms to prevent residue settling and plugging.
- Straight 80-foot and 60/80-foot fold-over boom options are available to cover 82.5 feet at 30-inch nozzle spacing, and 85 feet with 60-inch nozzle spacing.
- Optional LED lights increase the number of lights offered as well as improve the nighttime visibility for all-hours productivity.
- Quality application, easier operation and complete spray-out enabled by automated agitation settings.



SAVE TIME WITH NEW RELOAD STATION





50% LARGER POLY EDUCTOR

Adds a dry-hopper rinse and timesaving jug rinse for convenience and increased productivity.



TOUCH-BUTTON LCD SCREEN

Controls new LED reload light, sump controls, remote throttle and more.



DIGITAL TANK-LEVEL READOUT

Reports from center of tank for accurate loading, even on slopes.



FRESH WATER

Larger, two-inch fill connection at the reload station matches the RoGator connection and provides water for the optional injection-style foam marker system to eliminate manual mixing.



AGCO DRY PNEUMATIC SYSTEMS

With AGCO's pneumatic boom technologies, uneven terrain, wind, inconsistent granular fertilizer and the laws of gravity don't get in the way of applying the precise, even pattern that crops and pastures need. Product is precisely delivered through individual nozzles and boom sections from the conveyor chain until it reaches the ground. You can even shut down boom sections to reduce spread pattern by 50% for less waste, better accuracy and improved environmental stewardship.

PLACEMENT PRECISION The time-trusted AirMax Precision[™] and Air Spreader Soilection[®] systems are the best choice to place particles directly in the zone where they are needed when precision is the goal.

AIRMAX PRECISION SYSTEMS

AirMax Precision This single-bin system features 70-foot (21.3 m) spread pattern with triple-overlap coverage to ensure uniform application of up to 1,200 pounds (544.3 kg.) per acre.* Because independent suspensions keep spread pattern at the proper height, spread patterns are even more precise.

AirMax Precision 2 Spread two products at once with customizable application rates. Choose 50/50 or 60/40 configurations with the adjustable-split main bin to efficiently apply multiple products at varying rates with longer runs between reloading.

Both AirMax Precision systems can be equipped with an optional 40-cubic-foot (1.13 m³) granular bin for precise application of additional prescribed nutrients.

Plus, benefit from years of experience with a new generation of strength where it counts, like fan mounts that are reinforced with 85% more material, oil coolers protected with coatings proven in corrosive environments and the best-wearing hydraulic hoses from the industry leader.

^{*} Based on 65-lb. (29.5-kg.) density material applied at a rate of 10 mph (16 kph).



AIR SPREADER SOILECTION SYSTEMS

The Soilection Twin Bin This open, free-flowing two-bin system features a unique distributor head that is engineered for more consistent application. By delivering complex, multi-product applications through booms with 70-foot (12.3 m) spread width and double-overlap coverage, it delivers multiple products faster and more precisely in one application.

The Soilection Four Bin The ultimate system for accurately blending fertilizers, nutrients and chemicals lets you variably apply multiple products in a single pass to significantly reduce operating cost. It's just what the agronomist ordered.

Industry-Exclusive Option

 Add a dual 25-cubic-foot (0.70 m³) granular bin to the twinor four-bin system to apply up to six products at once for your single-pass prescription application.

NEW LEADER® SPINNERS WITH IMPROVED PRECISION

For the first time with a spinner-spreader, you can adjust the spread and swath of dry product to replicate the placement of 16 sections vs. one, using New Leader variable dry rate spinner systems on the TerraGator C Series.

Apply Multiple Products Use a five- or seven-foot MultApplier insert to apply one or two products simultaneously or at variable rates. Use the MultiBin to apply up to four products at once to handle a wide range of nutrients and prescriptions.

NL4500 G4 Edge Dry Nutrient Applicator Independent spinner speed control slows one spinner down to keep product in the field along boundaries.

NL5000 G5 Dry Nutrient Applicator with Swath Width Control Save costs and place product where it's needed with variable spread width control replicating 16-section swath width control through pinpoint fan-frame positioning.

TERRAGATOR C SERIES SPECIFICATIONS*

ENGINE Make Type Number of cylinders Displacement L (CID) Horsepower @ 2,100 RPM (kW)	332 (247)	AP84-4 6 8.4 (513)	AGCO Power	AP98-4		
Type Number of cylinders Displacement L (CID) Horsepower @ 2,100 RPM (kW)	332 (247)	6	AGCO Power	AP98-4		
Number of cylinders Displacement L (CID) Horsepower @ 2,100 RPM (kW)	332 (247)	6		AP98-4		
Displacement L (CID) Horsepower @ 2,100 RPM (kW)	322 (247)	6 7 8.4 (513) 9.8 (598) 332 (247) 365 (272) 425 (31) 363 (270) 393 (293) 452 (33) 1,180 (1,600) 1,416 (1,9) AGCO ML-260 Continuously Variable Transmission 41/23 (67/37) Rear tire opt. 1000/50R25 – 42/23 (68/42) Rear tire opt. 1050/50R32 – 46/29 (74/46) 41/21 (66/47) 3.75-in. diameter (9.5 cm) freewheeling, cold-rolled solid steel Steering type with 16.5-in. x 6-in. heavy-duty cam brakes Double reduction, out				
Horsepower @ 2,100 RPM (kW)	222 (247)	8 // (513)				
	222 (247)	8.4 (513)				
	332 (241)	332 (247) 365 (272)		425 (317)		
Peak horsepower @ 1,900 RPM (kW)	363 (270)			452 (337)		
Torque @ 1,500 RPM ft-lbs. (N-m)	,	1,180 (1,600)		1,416 (1,921)		
TRANSMISSION						
Туре	AGCO ML-260 Continuously Variable Transmission					
Forward speeds — high/low mph (kmh)				41/21 (66/34)		
AXLES						
Front	3.75-in. diameter (9.5 cm) freew	heeling, cold-rolled solid steel		5-in. diameter (12.7 cm) freewheeling, cold-rolled solid steel		
Rear	Wide track 42,000-lb. rating with floatation tires			Double reduction, outboard planetary 54,000-lb. rating with floatation tires		
SYSTEMS AND CAPACITIES						
Dry System						
AirMax Precision**	Single bin, 355 ft³ (10.1 m³)					
AirMax Precision 2**	Adjustable, split bin, 345 ft³ (9.8 m³)					
Soilection Twin Bin***	Two bins, 320 ft³ (9.1 m³)					
Soilection Four Bin***			r insert, MultiBin, up to 331 ft³ (9.3 m³)	Four bins, 340 ft ³ (9.6 m ³)		
New Leader NL4500						
New Leader NL5000	Single bin, MultApplier insert, MultiBin, up to 331 ft³ (9.3 m³)					
Liquid System						
Capacity gal. (L)	1,800 (6,814)			2,400 (9,885)		
Pump GPM (LPM)	260 (984)			280 (1,060) 450 (1,703) 800 (3,028)		
Booms ft. (m)	60/80 (18/24) fold-over boom 80 (24)					
Breakaway, full boom	Hydraulic, resettable					
Breakaway, boom tip	Mechanical, spring return					
Height / tilt adjustment	Hydraulic					
Nozzle spacing in. (m)						
Total spray width ft. (m)	82.5 (25.1) on 30 in. centers; 85 (25.9) on 60 in. centers					

^{*} Specifications are manufacturer's estimates at time of publication and are subject to change without prior notification. Actual weight will vary depending on optional equipment.

^{**} Single 40 cu.ft. (1.13 m³) granular bin available

^{***} Dual 25 cu.ft. (0.7 m³) granular bins available

MODELS	TG7300C	TG8300C	TG8400C	TG9300C		
AIR SYSTEM						
Compressor	Engine-mounted					
Governor	120 psi (8.2 bar)					
CFM	14.1 cfm (6.7 L/s)					
Reservoir	Dual					
VEIGHTS						
Rated capacity front lbs. (kg.)	14,000 (6,350)		16,000 (7,257)	14,000 (6,350)		
Rated capacity rear lbs. (kg.)		54,000 (24,494)				
SUSPENSION						
Гуре	Rigid rear axle to frame mount		Heavy-duty front and rear leaf springs with auxiliary rear leaf springs	Rigid rear axle to frame moun		
STEERING						
Гуре	Dynamic load sense					
TIRES						
Standard	Goodyear® Radial 1000/50R25		Front – Goodyear Radial 48X31R20 Rear – Goodyear Optiterra Radial	Goodyear Optiterra Radial		
Opt.	Michelin® Radial 1000/50R25		Front – Goodyear Radial 54X31R26 Rear – Michelin Radial 1000/50R25 Rear – Michelin Radial 1050/50R32	Michelin Radial 1050/50R32		
APPLICATION CAB						
Glass area / floor area sq.ft. (m²)	58 (5.4) / 14 (1.39)					
Cab suspension	Air-ride cab					
Radio	AM/FM / stereo / USB MP3-compatible / weather band / Bluetooth® with mic. Opt. SiriusXM®					
IVAC / Filtration	Automatic temperature control / 3-level activated carbon					
Standard seat	Cloth with air-ride suspension					
Opt. seat	Leather heated-vented with air-ride suspension					
LUID CAPACITIES						
Fuel gal. (L)	165 (625)			200 (757)		
Diesel exhaust fluid (DEF) gal. (L)	15 (56.8)		20 (75.7)			
Engine coolant gal. (L)	8 (30.3)			7.6 (28.8)		
ingine oil gal. (L)	6 (22.7)			8.5 (32)		
Fransmission oil gal. (L)	14 (53)			14 (53)		
lydraulic reservoir gal. (L)		9 (34)				
CONTROLLERS						
Raven Viper 4+						



TERRAGATOR C SERIES | TG7300C | TG8300C | TG8400C | TG9300C

AGCO FINANCE

At AGCO Finance, we understand that financing is as much a part of your purchase decision as the features and benefits of the product. So, we're committed to providing the best means of acquiring the equipment you need, while allowing you to preserve other credit lines of operating capital. To learn more, visit agcofinance.com.

AGCO ANSWERS

At AGCO, customer service isn't just a department. It's a commitment. Contact us with your questions. We'll do our best to answer them promptly or put you in touch with someone who can. Call (877) 525-4384 or agcoanswers@agcocorp.com.

AGCO AND ASMARK INSTITUTE

Our hands-on, four-day Applicator Training course provides professional training to newly hired applicators and those with up to five years of experience in liquid and dry application. To learn more, visit **applylikeapro.com**.

AGCO PARTS

AGCO Parts supports dealers with world-class service, providing tools like **agcopartsbook.com** to put parts information at your fingertips 24/7.

SPRAYPARTS.COM

The application industry's leading online source for all your sprayer part needs. Backed and supported by AGCO Parts and the AGCO Parts' dealer network, **sprayparts.com** provides easy access to genuine sprayer parts at competitive prices.


OPERATOR OF THE YEAR

Since 2006, AGCO has proudly presented the Operator of the Year award, chosen from nominations by ag retailers across North America. One operator who goes above and beyond in the field and in his or her community is awarded a Harley-Davidson® motorcycle, and we gain valuable insight from their experience and commitment. To learn more, visit applylikeapro.com.



For more than 25 years, in more than 140 countries worldwide, AGCO has been on a mission to become the single resource farmers can depend on for innovative, leading-edge thinking, equipment and technology. And, today, you know AGCO brands, even if you don't know the AGCO name. While AGCO equipment may not all share the same logo or same color, they all have one thing in common — the ability to help farmers be as productive and profitable as they can possibly be, regardless of the tasks at hand. **agcocorp.com**





FENDT



GLEANER

© 2018 AGCO Corporation. Challenger, RoGator and TerraGator are brands of AGCO Corporation. AccuCruise[™], AccuField Command[™], AccuTerminal[®], AGCO[®], AGCO Finance[®], AGCO Power[™], AgCommand[®], AgControl[™], AirMax[®], Fuse[®], RoGator[®], Soilection[®], TaskDoc[®] and TerraGator[®] are trademarks of AGCO. Auto-Guide[™] and Challenger[®] are trademarks of Caterpillar Inc. and are used under license by AGCO. Bluetooth[®] is a trademark of Bluetooth SIG, Inc. Goodyear[®] is a trademark of The Goodyear Tire & Rubber Company. Michelin[®] is a trademark of Michelin North America Inc. New Leader[®] is a trademark of Highway Equipment Company. AccuBoom[™], Raven[®] and Viper[®] are trademarks of Raven Industries, Inc. SiriusXM[®] is a trademark of Sirius XM Radio Inc. All rights reserved. CH18B002CR .1 POD

AGCO may at any time, and from time to time, for technical or other necessary reasons, modify any of the data, specifications or warranties of the products described herein. Some equipment shown may be optional. Attention: Photographs in this publication may show protective shields and guards open or removed for the purposes of illustration. Be certain all shields and guards are in place during operation.