

ATHENS

MODEL 93



The Model 93 is the ideal Disk for smaller farms, plantations, and ranches. This rugged Tandem Disk Harrow is available in widths from 9'4" to 15'3", making it the perfect choice for pasture land renovation, firebreaks, and food-plots.



" WE PLOW THE EARTH "

www.athensplowcompany.com



DISC BLADES

Available in 22 and 24 inch sizes. Athens Plow offers tailored solutions to meet your disking needs.

Smooth blades are best utilized in normal field conditions. They are more economical, wear longer, weigh more than cutout blades, and cut crop residue evenly.

Cutout blades are more aggressive and trap residue better than smooth blades.

CUTOUT OR SMOOTH

STANDARD EQUIPMENT

- Disc Blades, 22" or 24"
- Spacing: 9", 7 1/2", or 9" Front and 7 1/2" Rear
- Adjustable Cutting Angle: 15° or 19°
- Relube Quadraseal Ball Bearings
- Rigid Bearing Hangers with Wear Plates
- 1 1/4" Square Cold Rolled Axle
- Tapered Outside Front & Rear Gangs
- Heavy-Duty Scrapers
- Cover Discs with Scrapers
- Self Leveling Frame
- Gang Wrench and Tongue Jack
- Reversible Tongue Clevis
- 15" - 5 Lug Wheel Hubs and Rims
- Dual Wheels on 15' and 15'3"
- Lifting Hydraulics Complete
- Mechanical Transport

OPTIONS

- Dual Wheels on 9' 4" - 14' 1"
- Spring Bearing Hangers with Wear Plates
- Balk Buster

Athens Plow Co., Inc. guarantees each piece of equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified. Athens Plow Co., Inc. reserves the right to make changes and/or improvements in design and construction of parts or machines without notice or obligation.


MODEL 93 SPECIFICATIONS

WIDTH OF CUT	NUMBER OF DISCS	NUMBER OF BEARINGS	**APPROX. DBHP	APPROX. WEIGHT (lbs.)
9' 4"	24, 26, 28	8	60 - 75	2,898
10' 6"	28, 30, 32	8	70 - 85	3,123
12' 2"	32	12	85 - 95	3,493
12' 11"	36, 40	12	90 - 100	3,569
13' 6"	36	12	95 - 110	3,707
14' 1"	40, 44	12	100 - 120	3,754
15' 0"	40	16	100 - 125	4,751
15' 3"	44, 48	16	100 - 130	5,642


** Approximate Draw Bar Horse Power (DBHP) is only a guide. Extremely hard, soft, hilly or boggy conditions will change these figures.



The Rigid Bearing Hanger features a **Wear Plate** that bolts onto the front-side of the Bearing Hanger adding extra protection to the front and bottom of the Bearing Housing.

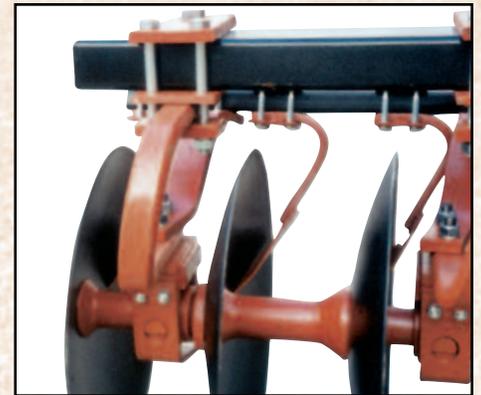

The Spring Bearing Hanger provides maximum strength without sacrificing flexibility. It also features a **Wear Plate** which protects the front and bottom of the Bearing Housing.



The Quadraseal Wheel Hubs

are an exclusive ATHENS PLOW design for increased Bearing life and reduction of downtime. Our QUADRASEAL Wheel Hubs offer maximum protection from dirt and trash by combining a triple lip seal with a press fitted external trash flinger. The QUADRASEAL Bearings give added bearing life.



The Quadraseal Double Tapered Roller Bearings

provide the most capacity in the industry. With this added capacity, the probability of overloading is virtually eliminated. The double tapered roller bearing has a triple-lip seal that runs on a hardened, polished surface and is protected by a heavy steel washer to avoid damage from wire and trash. Between the washer and the seal is a cavity filled with grease – an additional sealing element against dirt.



Quadraseal Ball Bearings

Strong relube QUADRASEAL ball bearings on the 93 cutout or smooth disc blades mean long life and less downtime.

