

HONDA



Honda Power Equipment

Lawn Mowers • Handhelds • Tillers • Pumps • Generators

The Legacy of Honda

Honda's history has been built on pushing technological boundaries to ensure the best experience for customers — no matter which Honda product they choose. Honda has produced more than 100 million Power Equipment products worldwide, all thanks to legendary Honda durability, quality and reliability.

Durability

Honda products are made to last. They are durable enough to withstand the elements or the demands of your job — from one season to the next.

Quality

Honda has built a strong reputation on the quality of our products. You can be assured that the materials, functionality and practicality of the design are all made with quality in mind.

Reliability

Our years of experience will provide you with the peace of mind that your Honda product has been engineered to be reliable and ready to perform — time and time again.



The Legendary Honda Engine

Building a legendary engine is no accident. Honda has more than 65 years of experience designing engines and is the largest engine manufacturer in the world. While some covet and others imitate, only genuine Honda offers a powerful, efficient and quiet 4-stroke engine designed perfectly for your Honda Power Equipment product.



Celebrating Over 65 Years
Honda Power Equipment

Providing Power Equipment to Customers for Over 65 Years

Since beginning power equipment production in 1953, Honda has been providing a remarkable level of quality to customers who rely on trustworthy and portable power solutions. Today, a diverse range of lifestyle-focused Honda Power Equipment products continue to be one of the favourite choices of Canadian consumers who value the timeless appeal of smooth and reliable power, enhanced efficiency, and modern designs that combine innovative technology with a user-friendly operation.



The Honda Civic keeps getting better

Since 1998, the Civic has been Canada's best-selling car and it's no wonder. The exterior and impressive performance of the 2021 Civic solidify its exciting evolution. The sport-inspired design is perfectly complemented by an available 1.5-litre turbocharged engine, while the striking interior is designed with both comfort and safety in mind. And with the Honda Sensing™ suite standard across the Civic lineup, you'll always drive with added confidence. Wherever the road leads, the Civic will lead the way.



The Height of Technology

HondaJet is the culmination of our vision to bring unmatched personal mobility to the skies. HondaJets represent the fastest, highest-flying, quietest and most fuel-efficient jets in their class—recognized as the world's most advanced light business jet aircraft, with best-in-class advantages in performance, comfort, quality and efficiency. The continued success of HondaJet is an achievement that showcases the ability for Honda to, quite literally, take their customers to new heights.



Real Quality. Real Power Equipment.

Honda engineers have pushed boundaries in every category of Honda Power Equipment. Each defined by exclusive technologies designed to outperform the competition. Each with a Honda engine at its heart. It's 100% Honda quality, found only in 100% Honda Power Equipment.

U.S. model shown

The Honda Retail Experience

Our Honda Power Equipment retailers are expertly trained to provide you with the highest level of Honda knowledge, service and support in finding the right Honda Power Equipment you need to get the job done.

Our experts will carefully assemble your product and show you how it works with a detailed demonstration upon purchase. Should you require it, our experts are also available to service and repair your Honda Power Equipment to our highest factory standards.

Find a Honda Power Equipment retailer near you at powerequipment.honda.ca

Why Honda?

Honda Power Equipment products are easy to start and don't mix oil and gasoline, offering up clean and quiet operation, low maintenance costs and low emissions. On top of that, each Honda Power Equipment product is built to be durable and dependable — you can count on it for years to come.

Honda Plus Extended Warranty

With Honda Plus Extended Warranty, you can enjoy the added security of knowing qualifying repairs are covered with zero deductible. Honda Plus is also fully transferable under most conditions and ensures your product is repaired by qualified Honda technicians using high-quality Honda Genuine parts. Some restriction or exclusions apply. For more information on warranty, please visit your local retailer or honda.ca

HONDA

Plus

Lawn Mowers

Honda offers exceptional value and quality that is built to last. From unique features that have been engineered to save you time and money, to clever technology that helps make lawn mowing easier, you can count on Honda.

Push-Type/Self-Propelled/Professional



Special Deck Design

The precisely engineered deck shape features an aerodynamic design to lift clippings and keep them circulating into the blade(s). The special deck design helps create optimal results and ultra-fine lawn clippings.

Smooth & Quiet Power

All Honda Lawn Mowers are powered by a reliable 4-stroke engine, delivering smooth and quiet performance that meets or exceeds EPA and CARB emissions standards.

Hydrostatic Transmission

Honda is the only manufacturer to offer an advanced hydrostatic transmission on a walk-behind mower.

Smart-Drive™ Control

Take complete command of your lawn mowing speed. Exclusive Honda Smart-Drive™ control can comfortably and intuitively match your preferred mowing pace with variable speeds that adapt to various users and conditions.

Twin-Blade Efficiency

The exclusive MicroCut™ twin-blade system cuts grass twice per pass, leaving behind extra-fine clippings, allowing you to mow more and bag less.

Ergonomic Comfort

All features and controls are easily accessible and simple to use. Enjoy incredibly intuitive and ergonomic design, carefully crafted to deliver an exceptional user experience and convenience.

Exclusive Blade Stop System

Honda RotoStop™ cleverly starts and stops the blade rotation (on select models), while the engine stays running. This technology safely eliminates pesky restarts and saves time as you resume mowing, empty bags, cross paths or move obstacles.

Versamow™ System

Get the versatility to individually or simultaneously mulch and bag. Plus, shred leaves or discharge clippings all without additional accessories using the Honda Versamow™ System — available on all HRX models.

Long-Lasting Quality

Premium Honda lawn mowers offer light yet strong impact-resistant NeXite™ deck construction. Developed to help prevent dents, rust and corrosion for long-lasting quality. 5-year warranty on the NeXite™ deck itself.

Exceptional Warranty

Honda Self-Propelled and Push Lawn Mowers are backed by a comprehensive 36-month non-commercial use and 12-month commercial use warranty.



Push-Type

Featuring innovation designed to assist with your everyday lawn mowing needs. Honda Push Mowers are perfect for small- to medium-sized yards.



HRS Side-Discharge

HRS216PKC

- Push-type, side-discharge, heavy-duty 53 cm (21 in.) steel deck.
- Perfect for cutting/mulching small lawns with great manoeuvrability in tight spaces and sharp corners due to its light weight.
- Mulching blade or Optional QuadraCut® twin-blade system.
- Easy starting with Auto Choke System™ (ACS).



HRN MicroCut™ Rear-Bag

HRN216PKC

- Push type, large-capacity rear bag, heavy-duty 53 cm (21 in.) steel deck.
- Complete 3-in-1 mowing system; bagging, exclusive MicroCut™ twin-blade mulching or rear discharge, with the exclusive Clip Director™.
- New Honda GCV170 engine with exclusive CycloFlow™ design delivers 10% more power and torque to the mower's blades.
- Easy starting and re-starting with the new & improved Auto Choke System™ (ACS).
- 2-position EZ Folding Quick Release Handle for easy operator height adjustment, or fold over for storage.

Self-Propelled

Loaded with premium features and technology to help ensure impeccable results and effortless performance.



HRN Smart-Drive™

HRN216VKC

- Self-propelled with variable-speed transmission and Smart-Drive™ control.
- Heavy-duty 53 cm (21 in.) steel deck.
- Complete 3-in-1 mowing system; bagging, exclusive MicroCut™ twin-blade mulching or rear discharge, with the exclusive Clip Director™.
- New Honda GCV170 engine with exclusive CycloFlow™ design delivers 10% more power and torque to the mower's blades.
- Easy starting and re-starting with the new and improved Auto Choke System™ (ACS).
- 2-position EZ Folding Quick Release Handle for easy operator height adjustment, or fold over for storage.



HRN Smart-Drive™ Blade-Stop System

HRN216VYC

- Self-propelled with variable-speed transmission and Smart-Drive™ control.
- Heavy-duty 53 cm (21 in.) steel deck.
- Complete 3-in-1 mowing system; bagging, exclusive MicroCut™ twin-blade mulching or rear discharge, with the exclusive Clip Director™.
- Easily empty bag without having to shut off and re-start engine with the RotoStop™ blade stop system.
- Easy starting and re-starting with the new and improved Auto Choke System™ (ACS) including full throttle control.



HRN Smart-Drive™ Electric-Start

HRN216VLC

- Self-propelled with variable-speed transmission and Smart-Drive™ control.
- Heavy-duty 53 cm (21 in.) steel deck.
- Equipped with a convenient and effortless 12 VDC self-charging electric key start.
- Complete 3-in-1 mowing system; bagging, exclusive MicroCut™ twin-blade mulching or rear discharge, with the exclusive Clip Director™.
- New Honda GCV170 engine with exclusive CycloFlow™ design delivers 10% more power and torque to the mower's blades.
- Easy starting and re-starting with the new and improved Auto Choke System™ (ACS).



HRX Hydrostatic Versamow™

HRX2176HYC

- All new Honda GCV200 engine, delivers 10% more power, easier maintenance, and a sleek design.
- Self-propelled with hydrostatic variable-speed transmission giving customized speed through nine pre-sets.
- Heavy-duty 53 cm (21 in.) NeXite™ polymer deck.
- Easily empty bag without having to shut off and re-start engine with the RotoStop™ blade stop system.
- Easy starting with Auto Choke System™ (ACS) including full throttle control.
- 4-in-1 ready Versamow™ System with ClipDirector™ – mulch, bag, discharge, leaf shred.



HRX Hydrostatic Electric-Start

HRX2176HXC

- All-new Honda GCV200 engine, delivers 10% more power, easier maintenance, and a sleek design.
- Self-propelled with hydrostatic variable-speed transmission giving customized speed through nine pre-sets.
- Heavy-duty 53 cm (21 in.) NeXite™ polymer deck.
- Equipped with a convenient and effortless 12 VDC self-charging electric key start.
- Easily empty bag without having to shut off and re-start engine with the RotoStop™ blade stop system.
- Easy starting with Auto Choke System™ (ACS) including full throttle control.



HRC Hydrostatic PRO

HRC2163HXH, HRC2163HXC

- Designed for commercial use, rear-bagging or mulching, with a rugged, durable and heavy-duty 53 cm (21 in.) steel deck with a front bumper and edge guards.
- Self-propelled, hydrostatic variable-speed transmission gives customized speed through nine pre-sets, while its reinforced handle and cables provide excellent durability for commercial use.
- MicroCut™ twin-blade system cuts grass twice per pass, creating ultra-small clippings so your bag can hold more and be easily emptied without having to shut off and re-start the engine with RotoStop™ blade stop system.

PROFESSIONAL

Lawn Mower Specifications

Specifications	Push-Type		Self-Propelled	
	HRS Side-Discharge	HRN MicroCut™ Rear-Bag	HRN Smart-Drive™	HRN Smart-Drive™ Blade-Stop System
Model Code	HRS216PKC	HRN216PKC	HRN216VKC	HRN216VYC
Deck Size	53 cm (21 in.)	53 cm (21 in.)	53 cm (21 in.)	53 cm (21 in.)
Deck Material	Steel (16 gauge)	Steel (16 gauge)	Steel (16 gauge)	Steel (16 gauge)
Deck Guards (Material)	N/A	N/A	N/A	N/A
Deck Type (Standard)	Mulcher, side-discharge	Rear bag, mulcher, rear discharge	Rear bag, mulcher, rear discharge	Rear bag, mulcher, rear discharge
Cutting Height Range	2.8 – 10.2 cm (1.125 – 4 in.)	2.7 – 10 cm (1 – 4 in.)	2.7 – 10 cm (1 – 4 in.)	2.7 – 10 cm (1 – 4 in.)
Cutting Height Adjustments	6 positions	7 positions	7 positions	7 positions
Wheel Size	20 cm (8 in.)	20 cm (8 in.)	20 cm (8 in.)	20 cm (8 in.)
Wheel Material	High impact plastic	High impact plastic	High impact plastic	High impact plastic
Wheel Bearing	Ball bearing on rear wheels	Sintered metal bushing — Rear only	Sintered metal bushing — Rear only	Sintered metal bushing — Rear only
Grass Bag	N/A	Standard	Standard	Standard
Bag Capacity	N/A	66 litres (1.9 bushels)	66 litres (1.9 bushels)	66 litres (1.9 bushels)
Discharge Chute	Side standard	Rear discharge chute standard	Rear discharge chute standard	Rear discharge chute standard
Mulching Capability	Standard	Standard	Standard	Standard
Mulching Plug/Cover	Standard	3-in-1 Clip Director*	3-in-1 Clip Director*	3-in-1 Clip Director*
Mulching System	Standard / Optional QuadraCut*	MicroCut System*	MicroCut System*	MicroCut System*
Blade(s)	Standard (One blade) & optional (Twin-blades)	Standard (Twin-blades)	Standard (Twin-blades)	Standard (Twin-blades)
Engine Type	Honda GCV160LAO, 4-stroke, OHC	Honda GCV170, 4-stroke, OHV	Honda GCV170, 4-stroke, OHV	Honda GCV170, 4-stroke, OHV
Honda Engine Model	GCV160LAO	GCV170	GCV170	GCV170
Displacement	160 cc (9.8 CID)	166 cc (10.1 CID)	166 cc (10.1 CID)	166 cc (10.1 CID)
Ignition System	Transistorized magneto	Transistorized magneto	Transistorized magneto	Transistorized magneto
Starting System	Recoil starter (handle mounted)	Recoil starter (handle mounted)	Recoil starter (handle mounted)	Recoil starter (handle mounted)
Zone Start Safety System	Standard	Standard	Standard	Standard
Air Cleaner	Dry type (Paper cartridge)	Dry type (Paper cartridge)	Dry type (Paper cartridge)	Dry type (Paper cartridge)
Lubrication System	Forced splash	Forced splash	Forced splash	Forced splash
Oil Capacity	0.50 litres (17 fl. Imp. oz.)	0.40 litres (14.1 fl. Imp. oz.)	0.40 litres (14.1 fl. Imp. oz.)	0.40 litres (14.1 fl. Imp. oz.)
Recommended Fuel	Regular unleaded gasoline (87 Octane) preferably without ethanol	Regular unleaded gasoline (87 Octane) preferably without ethanol	Regular unleaded gasoline (87 Octane) preferably without ethanol	Regular unleaded gasoline (87 Octane) preferably without ethanol
Fuel Tank Capacity	0.93 litres (32.7 fl. Imp. oz.)	0.91 litres (32.0 fl. Imp. oz.)	0.91 litres (32.0 fl. Imp. oz.)	0.91 litres (32.0 fl. Imp. oz.)
Fuel Consumption (Approximate)*	1.1 litres/hr (0.24 Imp. gal./hr)	1.0 litres/hr (0.22 Imp. gal./hr)	1.0 litres/hr (0.22 Imp. gal./hr)	1.0 litres/hr (0.22 Imp. gal./hr)
Choke System	Automatic (ACS)	Automatic (ACS)	Automatic (ACS)	Automatic (ACS)
Transmission	None (Push type)	None (Push type)	Variable Speed Fixed Gear Belt Clutch	Variable Speed Fixed Gear Belt Clutch
Drive Control	N/A	N/A	Variable multi-position Smart-Drive™	Variable multi-position Smart-Drive™
Ground Speed(s)	N/A	N/A	0-6.44 km/h (0-4 mph)	0-6.44 km/h (0-4 mph)
Dry Weight	28.7 kg (63.3 lb.)	33.3 kg (73.4 lb.)	36 kg (79.4 lb.)	39.9 kg (88.0 lb.)
Blade Stop System	Flywheel brake	Flywheel brake	Flywheel brake	Blade stop system (RotoStop™) standard
Standard Configuration	2-in-1: Mulch, discharge	3-in-1: Mulch, bag, rear discharge	3-in-1: Mulch, bag, rear discharge	3-in-1: Mulch, bag, rear discharge
Optional Configuration	N/A	N/A	N/A	N/A
Versamow™ System with Clip Director*	N/A	N/A	N/A	N/A

*NeXite™ Polymer deck carries a 5-year warranty. *Actual fuel consumption depends on operating load. **Self-charging (no need for "plug-in" charger).

Lawn Mower Specifications


Specifications	Self-Propelled			Professional
	HRN Smart-Drive™ Electric-Start	HRX Hydrostatic Versamow™	HRX Hydrostatic Electric-Start	HRC Hydrostatic PRO
Model Code	HRN216VLC	HRX2176HYC	HRX2176HZC	HRC2163HXH, HRC2163H
Deck Size	53 cm (21 in.)	53 cm (21 in.)	53 cm (21 in.)	53 cm (21 in.) with front bumper
Deck Material	Steel (16 gauge)	NeXite™ polymer*	NeXite™ polymer*	Heavy-duty steel (15 gauge)
Deck Guards (Material)	N/A	Optional (Stainless steel)	Optional (Stainless steel)	Standard (steel)
Deck Type (Standard)	Rear-bag, mulcher, rear discharge	Rear-bag, mulcher, rear discharge	Rear-bag, mulcher, rear discharge	Rear-bag, mulcher
Cutting Height Range	2.7 – 10 cm (1 – 4 in.)	1.9 – 10.1 cm (0.75 – 4 in.)	1.9 – 10.1 cm (0.75 – 4 in.)	1.9 – 10.1 cm (0.75–4 in.)
Cutting Height Adjustments	7 positions	7 positions	7 positions	8 positions
Wheel Size	20 cm (8 in.)	23 cm (9 in.) with deep tread	23 cm (9 in.) with deep tread	22.4 cm (8.8 in.) with deep tread
Wheel Material	High impact plastic	High density polyethylene	High density polyethylene	NeXite™ Polymer
Wheel Bearing	Sintered metal bushing - Rear only	Ball bearing on all wheels	Ball bearing on all wheels	Ball bearing on all wheels
Grass Bag	Standard	Standard	Standard	Standard
Bag Capacity	66 litres (1.9 bushels)	88 litres (2.5 bushels)	88 litres (2.5 bushels)	88 litres (2.5 bushels)
Discharge Chute	Rear discharge chute standard	Rear standard	Rear standard	Rear mounted side-discharge chute optional
Mulching Capability	Standard	Standard	Standard	Standard
Mulching Plug/Cover	3-in-1 Clip Director™	Versamow™ System Standard	Versamow™ System Standard	Standard
Mulching System	MicroCut™ System	MicroCut™ System	MicroCut™ System	MicroCut™ System
Blade(s)	Standard (Twin-blades)	Standard (Twin-blades)	Standard (Twin-blades)	Standard (Twin-blades)
Engine Type	Honda GCV170, 4-stroke, OHV	Honda GCV200, 4-stroke, OHV	Honda GCV200, 4-stroke, OHV	Honda GXV160 commercial-grade engine, 4-stroke, OHV
Honda Engine Model	GCV170	GCV200J02	GCV200J03	GXV160
Displacement	166 cc (10.1 CID)	202 cc (12.3 CID)	202 cc (12.3 CID)	163 cc (9.9 CID)
Ignition System	Transistorized magneto	Transistorized magneto	Transistorized magneto	Transistorized magneto
Starting System	12 VDC electric** / Recoil starter (back-up)	Recoil starter (handle mounted)	12 VDC electric** / Recoil starter	Recoil starter and automatic compression release
Zone Start Safety System	Standard	Standard	Standard	Standard
Air Cleaner	Dry type (Paper cartridge)	Dry type (Paper cartridge)	Dry type (Paper cartridge)	2 filter elements; foam and paper
Lubrication System	Forced splash	Forced splash	Forced splash	Forced splash
Oil Capacity	0.40 litres (14.1 fl. Imp. oz.)	0.40 litres (14.1 fl. Imp. oz.)	0.40 litres (14.1 fl. Imp. oz.)	0.65 litres (22.9 fl. Imp. oz.)
Recommended Fuel	Regular unleaded gasoline (87 Octane) preferably without ethanol	Regular unleaded gasoline (87 Octane) preferably without ethanol	Regular unleaded gasoline (87 Octane) preferably without ethanol	Regular unleaded gasoline (87 Octane) or higher, preferably without ethanol
Fuel Tank Capacity	0.91 litres (32.0 fl. Imp. oz.)	0.91 litres (32.0 fl. Imp. oz.)	0.91 litres (32.0 fl. Imp. oz.)	1.4 litres (49.3 fl. Imp. oz.)
Fuel Consumption (Approximate)*	1.0 litres/hr (0.22 Imp. gal./hr)	1.2 litres/hr (0.26 Imp. gal./hr)	1.2 litres/hr (0.26 Imp. gal./hr)	1.1 litres/hr (0.24 Imp. gal./hr)
Choke System	Automatic (ACS)	Automatic (ACS)	Automatic (ACS)	Manual
Transmission	Variable Speed Fixed Gear Belt Clutch	Hydrostatic Variable Speed	Hydrostatic Variable Speed	Hydrostatic
Drive Control	Variable multi-position Smart-Drive™	N/A	N/A	N/A
Ground Speed(s)	0-6.44 km/h (0-4 mph)	0-6.44 km/h (0-4 mph)	0-6.44 km/h (0-4 mph)	3.35-6.41 km/h (2.1-4.0 mph)
Dry Weight	39.6 kg (87.3 lb.)	44.2 kg (97.4 lb.)	47.9 kg (106 lb.)	55.4 kg (122 lb.)
Blade Stop System	Flywheel brake	Blade stop system (RotoStop™) standard	Blade stop system (RotoStop™) standard	Blade stop system (RotoStop™) standard
Standard Configuration	3-in-1: Mulch, bag, rear discharge	4-in-1: Mulch, bag, leaf shred, discharge	4-in-1: Mulch, bag, leaf shred, discharge	3-in-1 with optional rear-mounted side-discharge chute*
Optional Configuration	N/A	N/A	N/A	N/A
Versamow™ System with Clip Director*	N/A	Versamow™ standard	Versamow™ standard	N/A

*part # 06814-VK6-000

Handhelds

Built to be durable, reliable, and carefully designed with ergonomic elements for comfort and efficiency, every Honda Handheld delivers legendary quality and great performance.

Honda VersAttach™/Trimmer/Brush Cutter

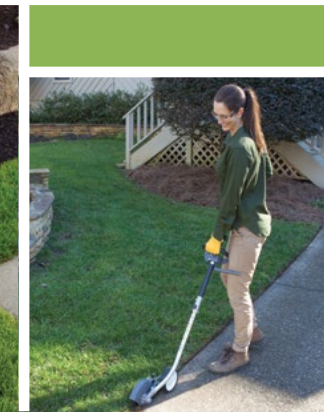

Top Quality

Each Honda Handheld is built to be durable and reliable. After all, we have a legendary reputation of exceptional Honda top quality and performance to live up to, each time you start up your Honda Handheld.

Engine Efficiency

Honda Handheld products are powered by GX25 and GX35 mini 4-stroke engines, which are among the lightest, quietest and most efficient 4-stroke engines on the market. Simple to maintain, these easy starting engines perform well even in the toughest conditions.



Long-Lasting Quality

Honda Handhelds are premium lawn and garden products offering innovative features and durable design, specifically tested and proven with long-lasting Honda quality in mind.

Standard Quiet Line™

Honda Quiet Line™ is standard on all handheld trimmer models. This premium line reduces noise level by another 5 decibels. Because Honda Handhelds offer strong low-end torque, you can do many jobs at partial throttle, reducing noise levels even further.



Durable Construction

Honda Handheld Straight-Shaft Trimmers feature a light, strong and flexible steel cable shaft for increased durability, reduced operator fatigue and superior shock absorption. Designed for longer life than a solid shaft, and with the strongest torsional power in the industry, it's also much easier to service.

Easy Starting

There's a reason Honda Engines are renowned for easy starting, strong reliability and user-friendly operation: the proven 4-stroke engine. Honda Handhelds offer excellent performance and are incredibly simple to start. No hassle, no fuss. Just a quick, consistent, easy start.




Exceptional Warranty

Honda Handhelds are backed by a comprehensive 24-month non-commercial use and 12-month commercial use warranty plus a convenient Honda retailer network offering trustworthy service.

Accessories & Attachments

A commercial-quality string trimmer head comes standard on all Honda Handheld Trimmers. Depending on your needs, it can be operated with a string cutting head or heavy-duty steel brush-cutting blade when used with the appropriate optional accessories and equipment. The versatile Honda VersAttach™ System offers even more flexibility with up to seven additional attachments designed to tackle various tasks and keep your yard looking its best.

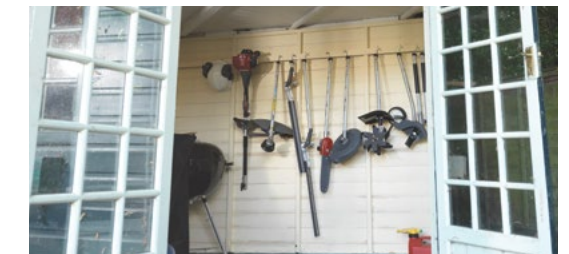

Honda VersAttach™

The Honda VersAttach™ is an innovative multifunction lawn and garden tool designed to simplify yard work and make life easier. The Honda VersAttach™ is a snap to use, easily connecting with up to seven interchangeable attachments to tackle residential and commercial landscaping tasks.



Honda VersAttach™ Powerheads UMC425C/435C

- The efficiently engineered 25 cc powerhead (UMC425C) delivers efficient mini 4-stroke power to easily get the job done. Each Honda Powerhead is simple to start and use, quickly connecting to a variety of different lawn and garden tool attachments to suit your landscaping needs.
- The larger 35 cc mini 4-stroke powerhead (UMC435C) provides plenty of power to tackle your yard work with ease. Comfortable to use and simple to start, each Honda Powerhead delivers premium quality, reliability and performance with up to seven different lawn and garden tool attachments.

Specifications	Honda VersAttach™ 25 cc Powerhead	Honda VersAttach™ 35 cc Powerhead
Model Code	UMC425C	UMC435C
Engine Type	Honda GX25, mini 4-stroke, OHC, single cylinder air-cooled multi-position (360°)	Honda GX35, mini 4-stroke, OHC, single cylinder air-cooled multi-position (360°)
Honda Engine Model	GX25	GX35
Displacement	25 cc (1.53 CID)	35.8 cc (2.18 CID)
Bore & Stroke	35 X 26 mm (1.4 X 1 in.)	39 X 30 mm (1.5 X 1.2 in.)
Maximum Net Torque	1 N.m (0.74 lbf-ft.) @ 5,000 RPM	1.6 N.m (1.20 lbf-ft.) @ 5,500 RPM
Idle Speed	3,100 ± 200 RPM	3,100 ± 200 RPM
Max. No-Load RPM* (Requires Blade Barrier)	10,000 RPM	10,000 RPM
Ignition System	Transistorized flywheel magneto (electronic)	Transistorized flywheel magneto (electronic)
Spark Plug	CMR5H (NGK)	CMR5H (NGK)
Cooling System	Forced air	Forced air
Starting System	Recoil starter	Recoil starter
Stopping System	Ignition primary circuit ground	Ignition primary circuit ground
Carburetor	Diaphragm type w/ fuel pump	Diaphragm type w/ fuel pump
Recommended Fuel	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (86 Octane or higher)
Fuel Primer	Anti-flood type	N/A
Fuel Capacity	0.5 litres (17.6 fl. Imp. oz.)	0.63 litres (22.2 fl. Imp. oz.)
Clutch Drive Type	Centrifugal Twin Shoe-Clutch	Centrifugal Twin Shoe-Clutch
Clutch Size	54 mm (2.125 in.) Diameter	78 mm (3.0625 in.) Diameter
Clutch Engagement	4:200 ± 200 RPM	4:200 ± 200 RPM
Air Cleaner	Semi-dry type	Semi-dry type
Lubrication System	Oil mist	Oil mist
Oil Capacity	80 cc (2.82 fl. Imp. oz.)	100 cc (3.52 fl. Imp. oz.)
Recommended Oil	SAE 10W30 API service classification SJ or later	SAE 10W30 API service classification SJ or later
Product Dimensions	5.1 kg (11.2 lb.)	6 kg (13.2 lb.)
Overall Length With Cutter Mounted	113.5 cm (44.7 in.)	114.5 cm (45.1 in.)
Overall Width	31.5 cm (12.4 in.)	32.0 cm (12.6 in.)
Overall Height	24.5 cm (9.6 in.)	25.5 cm (10.0 in.)
Dry Weight (Without Blade)	5.1 kg (11.2 lb.)	6.0 kg (13.2 lb.)
Handle Type	Loop	Loop
Throttle Control Type	Two-motion trigger type	Two-motion trigger type
Engine Stop Switch	Slide type switch	Slide type switch
Drive Shaft Type	Rigid Steel	Rigid Steel
Main Pipe Diameter	24 mm (0.94 in.)	26 mm (1.02 in.)
Main Pipe Thickness / Material	2 mm (0.08 in.) / Aluminum	2 mm (0.08 in.) / Aluminum
Shoulder Harness	Standard	Standard
Safety Goggles (A.N.S.I Std.)	n/a	n/a

Available Attachments



Pruner[†] SSPP

With a 30.5 cm (12 in.) guide bar and automatic oiler with flow rate adjustment, the pruner attachment is designed for trimming, pruning and cutting high branches.

Dimensions (LxWxH)	78.5 x 8.4 x 14 cm (30.9 x 3.3 x 5.5 in.)
Weight	1.7 kg (3.8 lb.) - Includes saw chain, guide bar & transportation guard
Guide Bar Length	30.5 cm (12 in.)
Shaft Length	635 mm (25 in.)
Chain Type	3/8 in. pitch x 0.05 in. gauge x 45 links Honda part # 72511-VL6-013HE
Sharpening File	Round 4 mm (5/32 in.)



Edger SSET

With a height-adjustable blade and lightweight ergonomic design, the edger is configured to safely operate and help ensure your sidewalk and beds are pristine.

Dimensions (LxWxH)	70 x 20 x 36 cm (27.5 x 7.9 x 14.2 in.)
Weight	1.9 kg (4.1 lb.)
Blade Length	20 cm (7.87 in.)



Trimmer/Brush Cutter SSBC

Combined with an easy-grip loop handle and durable 2-line bump-feed nylon cutter head, the trimmer/brush cutter makes light work of even the most stubborn of grass and weeds.

Dimensions (LxWxH)	72.5 x 31 x 20 cm (28.5 x 12.2 x 7.9 in.)
Weight	1.6 kg (3.5 lb.)
Cutting Swath	42 cm (16.5 in.)
Driveshaft Type	Solid Steel
Maximum Spindle Speed	6,900 RPM
Head Type	2-Line Bump-Feed
Trimmer Line Diameter	2.7 mm (0.105 in.)
Optional Accessories Kit	Steel 3-tooth grass blade kit (Part# UMBK35C)



Blower SSBL

High air speed up to 315 km/h* and air volume up to 250 cfm* provides powerful and targeted airflow parallel to the ground that easily keeps garden paths, driveways and lawns free of debris.

* UMC435

Dimensions (LxWxH)	86.5 x 28 x 16 cm (34 x 11 x 6.3 in.)
Weight	2.2 kg (4.85 lb.)
Maximum Air Speed (km/h - mph)	UMC425: 296 - 184 UMC435: 315 - 196
Maximum Air Volume (CFM)	UMC425: 235; UMC435: 250



Hedge Trimmers (Short and Long)[†] SSHH-S SSHH-L

The short or long shaft articulating hedge trimmer attachment with a 55 cm (21.7 in.) double-sided and double-reciprocating blade helps keep your hedges, bushes and shrubs in shape.

Dimensions (LxWxH)	S: 89.5 x 12.4 x 12.4 cm (35.2 x 4.9 x 4.9 in.) L: 140 x 12.4 x 12.4 cm (55.1 x 4.9 x 4.9 in.)
Weight	S: 2.2 kg (4.8 lb.) L: 2.7 kg (6 lb.)
Shaft Length	S: 13.5 cm (5.3 in.) L: 63 cm (24.8 in.)
Cutter Type	Double-sided, double-reciprocating
Blade Length	55 cm (21.6 in.)
Articulation	18° Angle Increment
Total Articulation Range	108° (-54° - +54°)



Cultivator SSCL

With a tine diameter of 24 cm (9.4 in.), the cultivator makes tilling, aerating and the cultivation of garden plots, raised flower beds and lawns ideal, simple and stress-free.

Dimensions (LxWxH)	80 x 24.4 x 25.4 cm (31.5 x 9.6 x 10 in.)
Weight	3.3 kg (7.2 lb.)
Tine Diameter	24 cm (9.4 in.)
Tilling Width	16.6 cm (6.5 in.)
Tine Speed	233 RPM @ 10,000 RPM engine speed



[†]Extensions for Pruner & Hedge Trimmers

Optional extension attachments provide extra reach with hedge or pruner trimmer attachment. Available in two sizes: SSESCL: 50 cm (19.7 in.), SSESSC: 1 m (39.4 in.).

Trimmers

From the grass line to thick weeds, Honda Handheld Trimmers offer exceptional comfort, efficiency and performance.



Loop-Handle 25 cc HHT25SL

- Perfect for jobs around the home because it's powerful and lightweight.
- Includes Semi-matic (tap-and-go) trimmer head and shoulder harness.

Brush Cutters

Make quick work of thick grass, heavy brush and small saplings with strong low-end torque.



U-Handle 25 cc HHT25SU

- Bike-type handlebar with fingertip controls.
- Includes Semi-matic (tap-and-go) trimmer head and 4-tooth brush-cutting blade with blade guard and mounting hardware, as well as professional double-loop harness.



U-Handle 35 cc HHT35SU

- Versatile and heavy-duty for tough trimming needs.
- Includes manual line feed head and brush-cutting blade with blade guard and mounting hardware, as well as professional double-loop harness.



Trimmer/Brush Cutter Specifications

Specifications	Loop-Handle 25 cc	U-Handle 25 cc	U-Handle 35 cc
Model Code	HHT25SLTCT	HHT25SUT4C	HHT35SUKCT
Engine Type	Honda GX25, mini 4-stroke, OHC, single cylinder air-cooled multi-position (360°)	Honda GX25, mini 4-stroke, OHC, single cylinder air-cooled multi-position (360°)	Honda GX35, mini 4-stroke, OHC, single cylinder air-cooled multi-position (360°)
Honda Engine Model	GX25	GX25	GX35
Displacement	25 cc (1.53 CID)	25 cc (1.53 CID)	35.8 cc (2.18 CID)
Bore & Stroke	35 X 26 mm (1.4 X 1 in.)	35 X 26 mm (1.4 X 1 in.)	39 X 30 mm (1.5 X 1.2 in.)
Maximum Net Torque	1 N.m (0.74 lbf-ft.) @ 5,000 RPM	1 N.m (0.74 lbf-ft.) @ 5,000 RPM	1.6 N.m (1.20 lbf-ft.) @ 5,500 RPM
Idle Speed	3,100 ± 200 RPM	3,100 ± 200 RPM	3,100 ± 200 RPM
Max. No-Load RPM (Requires Blade Barrier)	10,000 RPM	10,000 RPM	10,000 RPM
Ignition System	Transistorized flywheel magneto (electronic)	Transistorized flywheel magneto (electronic)	Transistorized flywheel magneto (electronic)
Spark Plug	CMR5H (NGK)	CMR5H (NGK)	CMR5H (NGK)
Cooling System	Forced air	Forced air	Forced air
Starting System	Recoil starter	Recoil starter	Recoil starter
Stopping System	Ignition primary circuit ground	Ignition primary circuit ground	Ignition primary circuit ground
Carburetor	Diaphragm type w/fuel pump	Diaphragm type w/fuel pump	Diaphragm type w/fuel pump
Recommended Fuel	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)
Fuel Primer	Anti-flood type	Anti-flood type	Anti-flood type
Fuel Capacity	0.5 litres (17.6 fl. Imp. oz.)	0.5 litres (17.6 fl. Imp. oz.)	0.65 litres (22.9 fl. Imp. oz.)
Fuel Consumption (Approximate)**	0.5 litres/hr (0.11 Imp. gal./hr)	0.5 litres/hr (0.11 Imp. gal./hr)	0.7 litres/hr (0.15 Imp. gal./hr)
Clutch Drive Type	Centrifugal Twin Shoe-Clutch	Centrifugal Twin Shoe-Clutch	Centrifugal Twin Shoe-Clutch
Clutch Size	54 mm (2.125 in.) Diameter	54 mm (2.125 in.) Diameter	78 mm (3.0625 in.) Diameter
Clutch Engagement	4,200 ± 200 RPM	4,200 ± 200 RPM	4,200 ± 200 RPM
Air Cleaner	Semi-dry type	Semi-dry type	Semi-dry type
Lubrication System	Oil mist	Oil mist	Oil mist
Oil Capacity	80 cc (2.82 fl. Imp. oz.)	80 cc (2.82 fl. Imp. oz.)	100 cc (3.52 fl. Imp. oz.)
Recommended Oil	SAE 10W30 API service classification SJ or later	SAE 10W30 API service classification SJ or later	SAE 10W30 API service classification SJ or later
Product Dimensions	188.5 cm (74.2 in.)	191 cm (75.2 in.)	190.5 cm (75 in.)
Overall Length with Cutter Mounted	188.5 cm (74.2 in.)	191 cm (75.2 in.)	190.5 cm (75 in.)
Overall Width	34.5 cm (13.6 in.)	(handlebars) 60.5 cm (23.8 in.)	(handlebars) 60 cm (23.6 in.)
Overall Height	26.5 cm (10.4 in.)	41.5 cm (16.3 in.)	40.5 cm (15.9 in.)
Dry Weight (Without Blade)	5.9 kg (13 lb.)	6.15 kg (13.6 lb.)	7 kg (15.4 lb.)
Handle Type	Loop	U-shaped (bike-type handle)	U-shaped (bike-type handle)
Throttle Control Type	Two-motion trigger type	Two-motion trigger type	Two-motion trigger type
Engine Stop Switch	Slide type switch	Slide type switch	Slide type switch
Cutting Head (Standard)	Semi-matic line feed nylon (tap-and-go)	Semi-matic line feed nylon (tap-and-go)	Manual line feed nylon
Cutting Head (Optional)	Manual, pro-tap, semi-pro	Manual, pro-tap, semi-pro	Semi-matic, pro-tap, semi-pro
Cutting Width	43.2 cm (17 in.)	43.2 cm (17 in.)	43.2 cm (17 in.)
Line Type	Quiet Line™	Quiet Line™	Quiet Line™
Cutting Line Diameter	2.41 mm (0.095 in.)	2.41 mm (0.095 in.)	2.41 mm (0.095 in.) or 2.67 mm (0.105 in.)
Anti-Vibration System	Standard	Standard	Standard
Drive Shaft Type	Flexible steel cable	Flexible steel cable	Flexible steel cable
Final Drive Gear Case	Helical cut bevel gears / Sealed ball bearings	Helical cut bevel gears / Sealed ball bearings	Helical cut bevel gears / Sealed ball bearings
Gear Ratio	1.235 Input shaft: 1 (Output Shaft)	1.235 Input shaft: 1 (Output Shaft)	1.235 Input shaft: 1 (Output Shaft)
Main Pipe Diameter	25.4 mm (1 in.)	25.4 mm (1 in.)	25.4 mm (1 in.)
Main Pipe Thickness / Material	1.5 mm (0.06 in.) / Aluminum	1.5 mm (0.06 in.) / Aluminum	1.5 mm (0.06 in.) / Aluminum
Trimmer Guard With Cutter	Standard	Standard	Standard
Steel Blade Guard	Optional	Standard	Standard
Shoulder Harness	Standard	N/A	N/A
Professional Double Loop Harness	Optional†	Standard	Standard
Safety Goggles (A.N.S.I. Std.)	N/A	N/A	N/A

* Without cutting head. ** Actual fuel consumption depends on operating load. *** Requires blade barrier kit. † Includes barrier, double harness and blade mounting hardware. †† Must be used with all blade applications.

Tillers

Honda Tillers are smooth running and exceptionally quiet, and our high-quality, commercial-grade features make short work of tough jobs. A single pass with a Honda Tiller will leave behind just what you want — fully mixed and loosened soil at its best.

Gardening/Ground Breaking



Dedicated Technology

Each Honda Tiller is built using technology and innovation you just won't find anywhere else. We've proven that tillers can be powerful without being noisy, overweight and cumbersome. Try one to see and feel the difference for yourself.

Tilling Width

There are five Honda Tiller models with tilling widths ranging from 15 cm (6 in.) to 92 cm (36 in.) in size. From small residential gardens to large commercial lots, there's an ideally suited tiller for every job.

Dual Element Air Filtration System

The high-quality, premium Honda Air Filter helps protect the tiller from its dusty work environment. Select models feature the Honda "Cyclone" Air Filter, which extends filter service intervals and provides extra protection in extreme dust conditions.

Commercial Grade Transmission

Honda Commercial-Grade Transmissions feature a heavy-duty drive gear, a front engine guard for added protection and our exclusive Honda-designed hybrid digging/cultivating tines.

Rear-Tine ARS™ Active Rotary System

Honda Active Rotary System (ARS™) featured on the Rear-Tine 20" ARS (FR650) uses a patented co-axial counter-rotating tine drive system, working like a powerful mixer made for soil and resulting in optimum soil texture with minimum effort.

Exceptional Warranty

Honda Tillers are backed by a comprehensive warranty of up to 36 months and a convenient Honda retailer network offering trustworthy service.

Easy Operation

Honda Mid-tine Tillers have three-position handle height adjustment. Rear-tine tillers feature both three-position and four-position handle height adjustment. Honda Tillers are light and easy to operate. Plus, the adjustable handle height provides comfort while you work.

Long-Lasting Quality

Honda Tillers are premium garden products offering innovative features and durable design, specifically tested and proven with long-lasting Honda quality in mind.



Gardening

Honda Garden Tillers and Mid-tine Tillers are perfect for small and medium gardening jobs.



Mini-Tiller 9" FG110

- Perfect for smaller gardens, raised beds and narrow rows.
- Lightweight, ultra-compact with 15.2 or 23 cm (6 or 9 in.) tilling widths.
- Versatile with four optional attachments: walkway edger, lawn dethatcher, digging tines and lawn aerator.



Mid-Tine 21" F220

- Perfect for backyard flowerbeds, suburban vegetable gardens and at the cottage.
- 54.5 cm (21.5 in.) tilling width.
- Easy transportation with foldable handles and retractable front wheel.



Mid-Tine 36" Multi-Drive F501

- Perfect for demanding jobs around the yard.
- 91.4 cm (36 in.) tilling width and adjustable handlebar.
- 2 forward and 1 reverse speed.
- Narrow gear case for deeper tilling and retractable transport wheel.

Ground Breaking

Honda Rear-tine Tillers are best for extra-large gardens or breaking up hard ground.



Rear-Tine 20" ARS™ FR650

- Perfect for tilling hard or never-broken ground.
- Exclusive ARS™ Active Rotary System with two sets of counter-rotating tines efficiently till the soil with reduced pulling and kick back.
- 51 cm (20 in.) tilling width.
- 2 forward and 1 reverse speed.



Rear-Tine 20" PRO FRC800

- Designed specifically for rental stores and commercial users who are breaking new ground day after day.
- 50 cm (19.7 in.) tilling width.
- 3 forward and 1 reverse speed.
- Heavy-duty gear case, shift lever, tines and tine housing and wraparound steel bumper guard.



Tiller Specifications

	Gardening			Ground Breaking	
Specifications	Mini-Tiller 9"	Mid-Tine 21"	Mid-Tine 36" Multi-Drive	Rear-Tine 20" ARS™	Rear-Tine 20" PRO
Model Code	FG110	F220	F501	FR650	FRC800
Tiller Type	Mini	Mid-tine	Mid-tine	Rear-tine ARS™ (Active Rotary System)	Rear-Tine
Engine Type	Honda GX25, mini 4-stroke, OHC, single cylinder, air-cooled, multi-position (360°)	Honda GXV57, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder	Honda GX240T2, 4-stroke, OHV, single cylinder
Displacement	25 cc (1.5 CID)	57 cc (3.5 CID)	163 cc (10 CID)	163 cc (10 CID)	270 cc (16.5 CID)
Fuel Tank Capacity	0.55 litres (19.4 fl. Imp. oz.)	0.7 litres (24.6 fl. Imp. oz.)	2.5 litres (0.55 Imp. gal.)	2.8 litres (0.62 Imp. gal.)	4.4 litres (0.97 Imp. gal.)
Recommended Fuel	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)
Starting System	Recoil starter	Recoil starter	Recoil starter	Recoil starter	Recoil starter
Air Cleaner	Semi-dry type	Dry paper type	Dry paper type	Dual-element type	Dual-element type w/ cyclone filter
Transmission Type	Worm gear	Gear drive	Chain drive	Chain drive	Chain drive
Transmission Speed(s)	1-forward	1-forward	2-forward / 1-reverse	2-forward / 1-reverse	3-forward / 1-reverse
Tilling Width	23 cm (9 in.) or 15.2 cm (6 in.)	54.5 cm (21.5 in.)	91.4 cm (36 in.)	51 cm (20.1 in.)	50 cm (19.7 in.)
Tine Diameter	20 cm (8 in.)	28 cm (11 in.)	28 cm (11 in.)	32.6 cm (12.8 in.)	30 cm (11.8 in.)
Tine Speed @ max. Torque Speed	182 RPM	130 RPM	80/113 RPM	238 RPM	219 RPM
Overall Length	103.8 cm (40.9 in.)	120 cm (47.2 in.)	132 cm (52 in.)	145 cm (57.1 in.)	166 cm (65.4 in.)
Overall Height	100 cm (39.4 in.)	97.5 cm (38.4 in.)	99.5 cm (39.2 in.)	110 cm (43.3 in.)	124.5 cm (49 in.)
Overall Width	36.5 cm (14.4 in.)	54.5 cm (21.5 in.)	95.5 cm (37.6 in.)	57 cm (22.4 in.)	61 cm (24 in.)
Dry Weight	11.3 kg (24.9 lb.)	22.5 kg (49.6 lb.)	61 kg (134.5 lb.)	87 kg (191.8 lb.)	120 kg (264.6 lb.)
Folding Handle	Standard	Standard	N/A	N/A	N/A
3-Position Handle Adjustment	N/A	Standard	Standard	N/A	N/A
4-Position Handle Adjustment	N/A	N/A	N/A	Standard	Standard
Transport Wheels	Standard	Standard	Standard	N/A	N/A
Adjustable Depth Bar	Standard	Standard	Standard	Standard	Standard

Pumps

Each Honda Pump includes high-tech features developed with more than 20 years of innovation. Durable construction, high-power engines for easy portability — all add up to excellent pumping performance. Every Honda Pump features a reliable 4-stroke engine that delivers smooth, quiet performance.


Transfer/Construction/High-Pressure

Full Range of Power

The extensive Honda Pump lineup has the right pump to meet your needs. The complete lineup includes transfer, high-pressure and construction pumps. Each is equipped with a durable, commercial-grade engine you can trust around the home and on the job.

Long-Lasting Quality

Honda Pumps are premium lawn and garden products offering innovative features and durable design, specifically tested and proven with long-lasting Honda quality in mind.

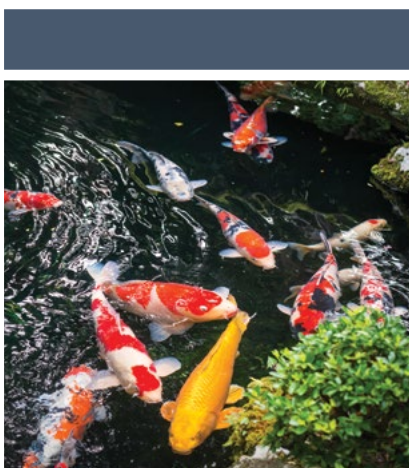

Impeller Construction

All Honda Pumps adhere to the highest standards of quality in every aspect of their design. Rugged, cast iron impellers and mechanical seals help to ensure years of reliable service, and they also contribute to a Honda Pump's ability to maintain maximum discharge capacity.

Accessories

Honda Pumps also have a wide range of accessories available, including multiple types and lengths of hoses, garden hose adapters, nozzle kits, strainers and rings, as well as various clamp sets and coupling parts. Honda has the accessories you need to get the job done right.



Commercial-Grade Engine

At the heart of every Honda Pump is a dependable, fuel-efficient, 4-stroke engine proven to deliver more pumping power and up to 25% better fuel efficiency over comparable side-valve engines. All Honda Pumps use commercial-grade Honda GX Series gasoline engines known for quiet operation.

Exceptional Warranty

Many Honda Pumps are backed by a comprehensive warranty of up to 36 months and a convenient Honda retailer network offering trustworthy service.



Exceptional Performance

Select models feature rubber mounts installed between the engine and the aluminum frame to help absorb vibration. The high-performance rubber mounts help keep the unit from shifting, reduce stress and wear and provide quiet operation. Honda thought of all the details for exceptional performance.



Transfer

Transfer Pumps are designed for small to mid-sized jobs such as pool maintenance.



Chemical Multi-purpose 2"

WMP20

- Designed for pumping a diversity of industrial and agricultural liquid chemicals (over 70 chemicals) in addition to regular clear water applications.
- Moves up to 833 L (183 Imp. gal.) per minute through 50 mm (2 in.) suction and discharge ports.
- Features EPDM seals (ethylene-propylene terpolymere) for chemical resistance, a reinforced thermoplastic pump housing, impeller and full-frame protection.



Portable 1"

WX10

- Very portable for pool maintenance, filling water tanks at the cottage and small drainage jobs.
- Lightweight and compact, only 6.1 kg (13.4 lb.).
- Moves up to 120 L (26.4 Imp. gal.) per minute through 25 mm (1 in.) suction and discharge ports (1" NPT- 0.75" garden hose adapter included).



Portable 1.5"

WX15

- Very portable for pool maintenance, filling water tanks at the cottage and small drainage jobs.
- Lightweight and compact, only 9 kg (20 lb.).
- Moves up to 240 L (53 Imp. gal.) per minute through 38 mm (1.5 in.) suction and discharge ports
- If oil drops below a safe operating level, the engine is designed to automatically shut down with Oil Alert™ System.



Utility 2"

WB20

- Commercial-grade engine, high efficiency and heavy-duty cast iron impeller for more demanding tasks.
- Moves up to 620 L (136 Imp. gal.) per minute
- Full-frame construction with anti-vibration mounting system.



Utility 3"

WB30

- Commercial-grade engine and heavy-duty, cast iron impeller for more demanding tasks.
- Moves up to 1,100 L (242 Imp. gal.) per minute through 80 mm (3.1 in.) suction and discharge ports.
- Full-frame construction with anti-vibration mounting system helps prevent sinking into soft ground.

Construction

Clean up with Construction Series Pumps that have the ability to remove water containing small rocks and unwanted debris.



Trash Pump 2"

WT20

- Heavy-duty, deep-vane impeller and extra-thick, cast-aluminum pump housing.
- Moves up to 710 L (156 Imp. gal.) per minute through 50 mm (2 in.) suction and discharge ports.
- If oil drops below a safe operating level, the engine is designed to automatically shut down with Oil Alert™ System.
- Full-frame construction with anti-vibration mounting system helps prevent sinking into soft ground.



Trash Pump 3"

WT30

- Heavy-duty, deep-vane impeller and extra-thick, cast-aluminum pump housing.
- Moves up to 1,210 L (266 Imp. gal.) per minute through 80 mm (3 in.) suction and discharge ports.
- If oil drops below a safe operating level, the engine is designed to automatically shut down with Oil Alert™ System.
- Full-frame construction with anti-vibration mounting system helps prevent sinking into soft ground.



Trash Pump 4"

WT40

- Heavy-duty, deep-vane impeller and extra-thick, cast-aluminum pump housing.
- Moves up to 1,640 L (361 Imp. gal.) per minute through 100 mm (4 in.) suction and discharge ports.
- If oil drops below a safe operating level, the engine is designed to automatically shut down with Oil Alert™ System.
- Full-frame construction with anti-vibration mounting system helps prevent sinking into soft ground.

High-Pressure

Advanced High-Pressure Pumps are capable of displacing water at greater pressures for irrigation, spraying and commercial use.



High-Pressure 1.5"

WH15

- High-pressure pump that performs a multitude of duties, from water transfer to irrigation.
- Moves up to 400 L (88 Imp. gal.) per minute.
- Designed to use with a fire hose nozzle for spraying further distances or irrigation.
- Convenient carrying handle and hose strainer.



High-Pressure 2"

WH20

- Perform a multitude of duties, from water transfer to irrigation, with this commercial-grade, high-output, high-pressure pump.
- Moves up to 500 L (110 Imp. gal.) per minute through 50 mm (2 in.) suction and discharge ports, high pressure (61 psi).
- Designed to use with a fire hose nozzle for spraying further distances or irrigation.
- Convenient carrying handle and hose strainer.

Pump Specifications

	Transfer				
Specifications	Portable 1"	Portable 1.5"	Utility 2"	Utility 3"	Chemical Multi-purpose 2"
Model Code	WX10	WX15	WB20	WB30	WMP20
Pump Type	Transfer	Transfer	De-watering, general purpose	De-watering, general purpose	Multi-purpose
Pump	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal
Type	Self-priming	Self-priming	Self-priming	Self-priming	Self-priming
Suction Port Diameter	25.4 mm (1 in.)	38 mm (1.5 in.)	50 mm (2 in.)	80 mm (3 in.)	50 mm (2 in.)
Discharge Port Diameter	25.4 mm (1 in.)	38 mm (1.5 in.)	50 mm (2 in.)	80 mm (3 in.)	50 mm (2 in.)
Litres Per Minute	120	240	620	1,100	833
Imp. Gal. Per Minute	26.4	53	136	242	220
Litres Per Hour	7,200	14,400	37,200	66,000	49,980
Imp. Gal. Per Hour	1,584	3,180	8,160	14,520	1,320
Total Head	37 m (121 ft.)	40 m (130 ft.)	32 m (105.6 ft.)	23 m (75.9 ft.)	32 m (105 ft.)
Suction Head (Total Lift.)	8 m (26 ft.)	8 m (26 ft.)	7.5 m (24.6 ft.)	7.5 m (24.6 ft.)	8 m (26 ft.)
Priming Time @ 5 m (16.4 ft.)	80 seconds	110 seconds	110 seconds	150 seconds	65 seconds
Pump Body	Aluminum	Aluminum	Aluminum	Aluminum	Fiberglass reinforced polyester
Impeller	Aluminum	Aluminum	Cast iron	Cast iron	Fiberglass reinforced polyester
Drive Unit Type	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal
Frame Type	Handle type, steel base	Handle type, steel base	Full frame	Full frame	Full frame
Engine Type	Honda GX25T, mini 4-stroke, OHC, single cylinder	Honda GXH50, 4-stroke, OHV, single cylinder	Honda GX120T2, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder
Displacement	25 cc (1.53 CID)	49 cc (2.99 CID)	118 cc (7.2 CID)	163 cc (9.95 CID)	163 cc (9.95 CID)
Lubrication System	Controlled oil mist	Splash type	Forced spray	Forced spray	Forced splash
Governor	Mechanical	Mechanical	Mechanical centrifugal	Mechanical centrifugal	Mechanical centrifugal
Starting System	Recoil starter	Recoil starter	Recoil starter	Recoil starter	Recoil starter
Fuel Tank Capacity	0.53 litres (0.12 Imp. gal.)	1.2 litres (0.26 Imp. gal.)	2 litres (0.44 Imp. gal.)	3.1 litres (0.68 Imp. gal.)	3.1 litres (0.68 Imp. gal.)
Oil Alert™ System	N/A	Standard	Standard	Standard	Standard
Length	34 cm (13.4 in.)	32.5 cm (12.8 in.)	49 cm (19.3 in.)	51 cm (20.1 in.)	52 cm (20.5 in.)
Width	22 cm (8.7 in.)	27.5 cm (10.8 in.)	36.5 cm (14.4 in.)	38.5 cm (15.2 in.)	40 cm (15.7 in.)
Height	29.5 cm (11.6 in.)	37.5 cm (14.8 in.)	42 cm (16.5 in.)	45.5 cm (17.9 in.)	45 cm (17.7 in.)
Dry Weight	6.1 kg (13.4 lb.)	9 kg (20 lb.)	20 kg (44.1 lb.)	26 kg (57.3 lb.)	26 kg (57 lb.)

Pump Specifications

	Construction			High-Pressure	
Specifications	Trash Pump 2"	Trash Pump 3"	Trash Pump 4"	High-Pressure 1.5"	High-Pressure 2"
Model Code	WT20	WT30	WT40	WH15	WH20
Pump Type	Trash	Trash	Trash	High pressure	High pressure
Pump	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal
Type	Self-priming	Self-priming	Self-priming	Self-priming	Self-priming
Suction Port Diameter	50 mm (2 in.)	80 mm (3 in.)	100 mm (4 in.)	40 mm (1.5 in.)	50 mm (2 in.)
Discharge Port Diameter	50 mm (2 in.)	80 mm (3 in.)	100 mm (4 in.)	40 mm (1.5 in.)	50 mm (2 in.)
Litres Per Minute	710	1,210	1,640	400	500
Imp. Gal. Per Minute	156	266	361	88	110
Litres Per Hour	42,600	72,600	98,400	24,000	30,000
Imp. Gal. Per Hour	9,360	15,960	21,660	5,280	6,600
Total Head	30 m (98 ft.)	27 m (89 ft.)	27 m (89 ft.)	39 m (127 ft.)	43 m (141 ft.)
Suction Head (Total Lift.)	8 m (26 ft.)	8 m (26 ft.)	8 m (26 ft.)	8 m (26 ft.)	8 m (26 ft.)
Priming Time @ 5 m (16.4 ft.)	60 seconds	90 seconds	150 seconds	80 seconds	80 seconds
Pump Body	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Impeller	Conical cast iron	Conical cast iron	Conical cast iron	Cast iron	Cast iron
Drive Unit Type	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal
Frame Type	Full frame	Full frame	Full frame	Handle type, steel base	Handle type, steel base
Engine Type	Honda GX160T2, 4-stroke, OHV, single cylinder	Honda GX270T2, 4-stroke, OHV, single cylinder	Honda GX390T2, 4-stroke, OHV, single cylinder	Honda GX120T2, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder
Displacement	163 cc (9.95 CID)	270 cc (16.5 CID)	389 cc (23.7 CID)	118 cc (7.2 CID)	163 cc (9.95 CID)
Lubrication System	Forced splash	Forced spray	Forced spray	Forced splash	Forced splash
Governor	Mechanical centrifugal	Mechanical centrifugal	Mechanical centrifugal	Mechanical centrifugal	Mechanical centrifugal
Starting System	Recoil starter	Recoil starter	Recoil starter	Recoil starter	Recoil starter
Fuel Tank Capacity	3.1 litres (0.68 Imp. gal.)	5.3 litres (1.17 Imp. gal.)	6.1 litres (1.34 Imp. gal.)	2 litres (0.44 Imp. gal.)	3.1 litres (0.68 Imp. gal.)
Oil Alert™ System	Standard	Standard	Standard	N/A	N/A
Length	62 cm (24.4 in.)	66 cm (26 in.)	73.5 cm (28.9 in.)	41.5 cm (16.3 in.)	42.5 cm (16.7 in.)
Width	46.0 cm (18.1 in.)	49.5 cm (19.5 in.)	53.5 cm (21.1 in.)	36 cm (14.2 in.)	37.5 cm (14.8 in.)
Height	46.5 cm (18.3 in.)	51.5 cm (20.3 in.)	56.5 cm (22.2 in.)	40.5 cm (15.9 in.)	40.5 cm (15.9 in.)
Dry Weight	47 kg (104 lb.)	61 kg (134 lb.)	78 kg (172 lb.)	22 kg (48.5 lb.)	23.5 kg (51.8 lb.)

Generators

Today, Honda generators are found hard at work around the world — from challenging remote locations to our very own harsh climate conditions found throughout Canada. Over 55 years of Power Equipment development and innovation by Honda engineers have given rise to a lengthy line of hard-working generators and applications built to suit your needs.

[Inverter/Economy/Cyclo-Converter/Premium](#)



Trusted Performance

Honda Generators are powered by proven 4-stroke Honda engines that don't mix oil and gas. This offers many advantages, including clean and quiet operation, low ownership costs and low emissions.

CSA Approved

All Honda Generators purchased in Canada meet or exceed Canadian Standards Association (CSA) safety and Environmental Protection Agency (EPA) emissions standards.

Light & Compact

Our latest inverter generators are smaller, lighter and quieter than ever before. Many Honda generators produce voltage that is smoother and more consistent than commercially available power sources.

Dual-Voltage Selection

Honda high-output generators offer dual electrical standby power and are available in 4,000 to 10,000 watt models. The dual-voltage configuration allows you to power up appliances that require 120 or 240 volts.

Cold Climate Technology™

Available on all models, Honda Cold Climate Technology™ is specifically designed for cold Canadian climates. This standard-issued breather heater system helps prevent generator shutdown in freezing conditions, so you don't get left out in the cold.

Super Quiet Operation

Honda Super Quiet portable generators feature exhaust and muffler technology engineered to lower noise ratings within the 48-60 dB(A) ranges, so you'll have to worry less about disturbing your neighbours — or your own peace and quiet.

Long Lasting Quality

Honda Generators are premium products offering rugged yet clever design with long lasting quality you can count on.

Easy Operation

From intuitive features and ease-of-use to the carefully crafted reliability of portable power, all Honda generator controls are easily accessible and designed for ultimate convenience.

Exceptional Warranty

Honda generators feature proven quality and reliability, along with a trusted warranty protection up to 36 months, and the support of a convenient Honda retailer network offering exceptional service.

Power Sensitive Electronics

Honda was first to develop generators capable of powering sensitive electronics. Inverter technology regulates surges of raw power and smooths them out to the same high-quality electricity as the outlets in your home. The inverter models range from 1,000 to 7,000 watts to power everything from a laptop to a cottage.



Inverter Series

Compact and quiet, with the ability to power even the most sensitive electronic equipment.



Ultra-Quiet 1000i

EU1000i

- Lightweight and portable 13 kg (28.7 lb.).
- Recommended for TVs, lights, fans, small power tools and more.
- Inverter, stable power of 1,000 watts, at 120 VAC.
- Up to 3 hours of power at maximum rated output, up to 7 hours at 25% output on a tank of gas.
- Parallel-connect capability with another EU1000i.



Ultra-Quiet 2200i

EU2200i

- 2,200 watts of Honda inverter 120 VAC power.
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability.
- Whisper-quiet operation — 57 dB(A) at rated load, 48 dB(A) at 25% load.
- Easy to carry — 21.1 kg (46.5 lb.).
- Double your power, connect it with a EU2200i Companion model for up to 4,400 watts maximum of power (3,600 watts rated).



Ultra-Quiet 2200i Companion

EU2200i Companion

- 2,200 watts of Honda inverter 120 VAC power.
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability.
- Easy to carry — 21.1 kg (46.5 lb.).
- Double your power, connect it with a EU2200i model for up to 4,400 watts maximum of power (3,600 watts rated).

Inverter Series

Generally used for camping, RVing, home appliances, power tools and more.



Ultra-Quiet 3000i

EU3000iK

- Lightweight and portable with wheels and a folding handle.
- Suitable for many larger household appliances, great for RVing (will power a 13,500 BTU/h air conditioner).
- Inverter, stable power of 3,000 watts, at 120 VAC.
- Up to 3.5 hours of power at maximum rated output, up to 7.7 hours at 25% output on a tank of gas.



Ultra-Quiet 3000i ES

EU3000is

- Powers most furnaces, fridges, microwaves, most 13,500 BTU/h RV AC units; great for RVing and more.
- Inverter — stable power of 3,000 watts, at 120 VAC.
- Up to 7.2 hours of power at maximum rated output, up to 20 hours at 25% output on a tank of gas.
- Electric start and back-up recoil start.



Ultra-Quiet 2200i GFCI

EB2200i GFCI

- 2,200 watts of Honda inverter 120 VAC power.
- Whisper-quiet operation — 57 dB(A) at rated load, 48 dB(A) at 25% load.
- Easy to carry — 21.1 kg (46.5 lb.).
- GFCI Duplex Receptacle, Neutral Bonded.
- Ideal for jobsite applications, modern hot air furnaces, sensitive equipment and electronics.



Economy 2800

EG2800iC

- At only 67 lbs, this lightweight inverter generator with Eco-Throttle™ gives you portable home backup and DIY power to keep the basics running during a power outage.
- Inverter, stable power of 2,800 watts max. (2,500 watts rated).
- 5.1 hours of power at the rated load, up to 12.1 hours at 25% output per tankful.
- User-friendly; the control panel includes step by step instructions to start the unit.



Ultra-Quiet 7000i ES

EU7000is

- Fuel injected — better fuel efficiency and lower maintenance.
- Inverter, stable power of 7,000 watts, at 120/240 VAC.
- Perfect for home and cottage back-up power, outdoor events and commercial worksites.
- Up to 6.5 hours of power at maximum rated output, up to 18 hours at 25% output on a tank of gas.
- Electric start and back-up recoil start.



Ultra-Quiet 2200i Combination

EU2200i + EU2200i Companion

- Easily paired together (Ultra-Quiet 2200i and Ultra-Quiet 2200i Companion) for parallel connectivity.
- Uses simple cord connection, no external box necessary.
- Power up to 4,400 watts with expandable parallel connectivity.
- Great for home, RV, and cottage back-up power, outdoor enthusiasts, street vendors.

Premium Series

A common choice in the construction and rental industry, these portable generators offer plenty of smooth power without sacrificing on durability or performance.

Commercial 6500 GFCI

EB6500

- Designed for the rigours of daily commercial usage and rental applications.
- 6,500 watts of power in dual-voltage configuration with GFCI protection.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output.
- Hanger kit/lifting eye for easier moving around the job site.



Commercial 5000 GFCI

EB5000

- Designed for the rigours of daily commercial usage and rental applications.
- 5,000 watts of power in dual-voltage configuration with GFCI protection.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output.
- Hanger kit/lifting eye for easier moving around the job site.



Commercial 10000 GFCI ES

EB10000

- Designed for the rigours of daily industrial/commercial usage and rental applications.
- 10,000 watts of power in dual-voltage configuration with GFCI protection.
- Convenient 12 VDC electric start.
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance.
- 31-litre fuel tank provides up to 6.5 hours of continuous power at maximum rated output, or up to 8.5 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.
- Hanger kit/lifting eye, wheel kit with folding handle for easier moving around the job site.



Electric Start 5000

EM5000S

- Perfect for home backup or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up.
- 5,000 watts of power in dual-voltage configuration.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.



Electric Start 6500

EM6500S

- Perfect for home back-up or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up.
- 6,500 watts of power in dual-voltage configuration.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.



The right wattage for the right amount of power

Generator Specifications

HOME

Application	Approximate wattage required for running	Approximate wattage required for starting
Coffee Maker	1,750	1,750
Dishwasher	1,450	1,800
Electric Fry Pan	1,300	1,300
Electric Range		
6 in. element	1,500	1,500
8 in. element	2,100	2,100
Microwave Oven, 625 watts	625	800
Toaster		
2-slice	1,050	1,050
4-slice	1,650	1,650
Electric Blanket (queen size)	800	800
Refrigerator or Freezer	700	2,200
20" Box Fan or Table Fan	120	180
Lights (as indicated on bulbs.)	(-)	(-)
Clothes Washer	1,150	2,300
Clothes Dryer		
Gas	700	1,800
Electric	5,750	1,800
Dehumidifier	650	800
Furnace Fan, gas or fuel oil		
0.125 hp	500	1,000
0.16 hp	750	1,500
0.25 hp	900	1,800
0.3 hp	1,000	1,800
0.5 hp	1,200	2,500
Sump Pump		
0.3 hp	750	1,500
0.5 hp	1,000	2,100
Hair Dryer	300 to 1,500	300 to 1,500
Clothes Iron	1,200	1,200
Room Air Conditioner - 10,000 BTU	1,500	2,200
Central Air Conditioner		
10,000 BTU	1,500	2,200
20,000 BTU	2,500	3,300
24,000 BTU	3,800	4,950
40,000 BTU	6,000	7,800
Radio	50 to 200	50 to 200
Television (colour)		
20 in. (LCD)	65	65
26 in. (LCD)	110	110
36 to 42 in. (Plasma)	250	250
50 to 60 in. (Plasma)	340	340
VCR/ DVD	35 to 50	35 to 50
Game Console	100	100
Laptop	50 to 75	50 to 75
Computer	150	150
Modem	25	25
Monitor		
Tube Type	200 to 250	200 to 250
LCD	30	30
Printer	100	100
RV Air Conditioner - 13,500 BTU	1,800	2,800
Vacuum Cleaner		
Upright	800	1,100
Canister	1,100	1,500
Garage Door Opener		
0.25 hp	550	1,100
0.3 hp	725	1,400





Note: Check your equipment or appliance for actual wattage requirement.

WORK

Application	Approximate wattage required for running	Approximate wattage required for starting
Air Compressor		
0.5 hp	1,000	2,000
1 hp	1,500	4,500
1.5 hp	2,200	6,000
2 hp	2,800	7,700
Bench Grinder		
6 in.	720	1,000
8 in.	1,400	2,500
10 in.	1,600	3,600
Electric Cultivator - 0.3 hp	700	1,400
Electric Hedge Trimmer - 18 in.	400	550
Electric Grass Trimmer	500	650
Drum Mixer - 0.25 hp	700	1,400
Flood Lights - Mercury Halogen	1,000	1,000
Floor Polisher		
16 in. - 0.75 hp	1,400	3,100
20 in. - 1 hp	1,600	4,500
Power Hand Drill		
0.25 in.	350	350
0.375 in.	400	400
0.5 in.	600	600
Submersible		
Water Pump 400 gpm	200	400
Centrifugal. Type	500	650
Wet/ Dry Vacuum		
1.7 hp	900	900
2.5 hp	1,300	1,300
Saws		
Worm Drive (chop saw)	1,800	2,600
Band Saw	1,100	1,400
Circular Saw		
6.5 in.	800	1,200
7.25 in.	1,400	2,300
8.25 in.	1,800	3,000
Electric Chain Saw		
12 in. - 1.5 hp	900	1,100
14 in. - 2 hp	1,100	1,400
Table Saw		
1.7 hp	1,500	3,000
2.5 hp	1,800	4,500
Electric Welders		
70-amp	2,800	2,800
100-amp	3,600	3,600
200-amp	9,000	9,000
Kango Hammer	900	1,200
Farm Equipment		
Electric Fence (40 km/25 miles)	250	250
Stock Tank De-icer	1,000	1,000
Grain Cleaner	650	1,000
Portable Conveyer - 0.5 hp	1,000	2,400
Grain Elevator - 0.75 hp	1,400	3,000
Milk Cooler	1,100	2,300
Mixer - 3.25 cubic feet, 0.75 hp	2,800	7,700
Milking Machine - 2 hp	1,000	2,300

Watts ÷ AMPS = Volts | Watts ÷ Volts = AMPS | Volts x AMPS = Watts

Inverter Series

Specifications	Ultra-Quiet 1000i	Ultra-Quiet 2200i	Ultra-Quiet 2200i Companion	Ultra-Quiet 2200i GFCI	Ultra-Quiet 3000i	Ultra-Quiet 3000i ES	Ultra-Quiet 7000i ES
Model Code	EU1000i*	EU2200i Parallel†	EU2200i Companion†	EB2200iTC	EU3000iK	EU3000iS	EU7000iS
Generator Type	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Dual inverter
Maximum AC Output (Watts)	1,000	2,200	2,200	2,200	3,000	3,000	7,000
AC Voltage Available	120	120	120	120	120	120	120 / 240
Maximum Continuous AC Output (Watts)	900	1,800	1,800	1,800	2,600	2,800	5,500
Max. Rated AC Amperage @ 120 V / 240 V	7.5 / -	15 / -	15.0 / - (30.0 / - in parallel operation)	15.0 / -	21.7 / -	23.3 / -	45.8 / 22.9
Ground Fault Circuit Interrupter (GFCI)	N/A	N/A	N/A	Standard	N/A	N/A	N/A
Frequency (Hertz)	60	60	60	60	60	60	60
Automatic Voltage Regulator	Standard	Standard	Standard	Standard	Standard	Standard	PWM (Pulse Width Modulation)
DC Output Volts / Amps	12 / 6.5	12 / 8.3	N/A	N/A	12 / 8.3	12 / 8.3	N/A
Common Duplex Receptacle Specifications	7.5 amps/120 VAC continuous is available as combined total from these two AC receptacles.	15.0 amps/120 VAC continuous is available as combined total from these two AC receptacles.	N/A	15.0 amps/120 VAC continuous is available as combined total from these two AC GFCI receptacles.	21.7 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	23.3 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	40 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps available from a single receptacle.
DC Receptacle Specifications	6.5 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	8.3 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A	N/A	8.3 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	8.3 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A
DC Charging Cable	Standard	Standard	N/A	N/A	Standard	Standard	N/A
High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications	N/A	N/A	This receptacle (NEMA # L5-30R) will supply 30.0 amps at 120 VAC continuously in parallel operation.	N/A	This receptacle (NEMA # L5-30R) will supply 21.7 amps at 120 VAC continuously	This receptacle (NEMA # L5-30R) will supply 23.3 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 22.9 amps at 240 VAC and 45.8 amps at 120 VAC continuously.
   							
Engine Type	Honda GXH50T OHV, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GX160T2 OHV, 4-stroke, air-cooled	Honda GX200T2 OHV, 4-stroke, air-cooled	Honda GX390T2 OHV, 4-stroke, air-cooled
Displacement	49.4 cc	121 cc	121 cc	121 cc	163 cc	196 cc	389 cc
Starting System	Manual recoil	Manual recoil	Manual recoil	Manual recoil	Manual recoil	Electric/recoil	Electric/recoil
Low Level Oil Alert™ System	Standard	Standard	Standard	Standard	Standard	Standard	Standard (LED display)
Auto Throttle	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard
Remote Start Capability	No	No	No	No	No	No	Optional
Fuel Tank Capacity	2 litres (0.44 Imp. gal.)	3.6 litres (0.79 Imp. gal.)	3.6 litres (0.79 Imp. gal.)	3.6 litres (0.79 Imp. gal.)	5.9 litres (1.30 Imp. gal.)	13 litres (2.86 Imp. gal.)	19.2 litres (4.22 Imp. gal.)
Transport Wheels	N/A	N/A	N/A	N/A	Standard	Optional wheel kits: 4-wheels, same size: P/N 06423-ZS9-T30 4-wheels, large RR & front swivel/locking wheels: P/N 06424-ZS9-000AH 2-wheels with telescoping handles: P/N 06425-ZS9-020AH	2-wheel kit standard
Lifting Hook	N/A	N/A	N/A	N/A	N/A	N/A	Optional (P/N 06531-Z11- E00ZA)
Battery	N/A	N/A	N/A	N/A	N/A	Standard (P/N 31500-HN1-003AH)	Standard (P/N 31500-MCR-D02AH)
Approximate Running Time (hrs.) / Tankful	3** / 7***	3.2** / 8.1***	3.2** / 8.1***	3.2** / 8.1***	3.5** / 7.7***	7.2** / 20***	6.5** / 18 ***
Rated Fuel Consumption (litres/hr)	0.67**	1.14**	1.14**	1.14**	1.68**	1.78**	2.95**
Noise Level dB(A) (1.5 m to 7 m)	57** / 52***	57** / 48***	57** / 48***	57** / 48***	64** / 57***	58** / 48***	60**
Length (Without Handles and Wheels)	451 mm (17.8 in.)	509 mm (20 in.)	509 mm (20.0 in.)	509 mm (20.0 in.)	622 mm (24.5 in.)	655 mm (25.8 in.)	N/A
Length (With Handles and Wheels)	N/A	N/A	N/A	N/A	N/A	N/A	1,198 mm (47.2 in.)
Width (Without Handles and Wheels)	242 mm (9.5 in.)	290 mm (11.4 in.)	290 mm (11.4 in.)	290 mm (11.4 in.)	379 mm (14.9 in.)	445 mm (17.5 in.)	539 mm (21.2 in.)
Width (With Handles and Wheels)	N/A	N/A	N/A	N/A	N/A	N/A	700 mm (27.6 in.)
Height (Without Lift-Hook)	379 mm (15 in.)	425 mm (16.7 in.)	425 mm (16.7 in.)	425 mm (16.7 in.)	489 mm (19.3 in.)	555 mm (21.9 in.)	721 mm (28.4 in.)
Height (With Lift-Hook)	N/A	N/A	N/A	N/A	N/A	N/A	821 mm (32.3 in.)
Dry Weight	13 kg (28.7 lb.)	21.1 kg (46.5 lb.)	21.1 kg (46.5 lb.)	21.1 kg (46.5 lb.)	35.2 kg (77.6 lb.)	59 kg (130 lb.)	118.1 kg (260.4 lb.)
Cold Climate Technology™	Standard	Standard	Standard	Standard	Standard	Standard	Standard

*Two EU1000i units in parallel: 15 amps/120 volts continuous is available from the 20 amp T-slot receptacle. Note: 16.6 amps is available for approx. 30 min. †Optional parallel operation cable (part number: 08E93-HPK-123H) required for parallel connectivity. Maximum continuous output in parallel operation is 3600 watts or 30 amps @ 120 VAC. **At max. rated output (continuous) in Watts. ***At 25% rated output (continuous) in Watts.



Generator Specifications

	Economy Inverter	Premium Series
Specifications	Economy 2800	Commercial 5000 GFCI
Model Code	EG2800	EB5000
Generator Type	Inverter	Brush type
Maximum AC Output (Watts)	2,800	5,000
AC Voltage Available	120	120 / 240
Maximum Continuous AC Output (Watts)	2,500	4,500 7,000 (iAVR)
Max. Rated AC Amperage @ 120 V / 240 V	20.8 / -	37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR)
Ground Fault Circuit Interrupter (GFCI)	N/A	Standard
Frequency (Hertz)	60	60
Automatic Voltage Regulator	PWM (Pulse Width Modulation)	Standard iAVR (Intelligent Automatic Voltage Regulator)
DC Output Volts / Amps	N/A	N/A
Common Duplex Receptacle Specifications	20.8 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 18.8 amps available from each GFCI duplex receptacle.
DC Receptacle Specifications	N/A	N/A
DC Charging Cable	N/A	N/A
High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications	This receptacle (NEMA # L5-30R) will supply 20.8 amps at 120 VAC continuously	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps (4.5 kVA) at 240 VAC continuously.
Engine Type	Honda GC190LA	Honda iGX390T2 OHV, 4-stroke, air-cooled
Displacement	186 cc	389 cc
Starting System	Manual recoil	Manual recoil
Low Level Oil Alert™ System	Standard	Standard
Auto Throttle	Eco-Throttle™ Standard	Standard
Remote Start Capability	No	No
Fuel Tank Capacity	8.1 litres (1.8 Imp. gal.)	23.5 litres (5.17 Imp. gal.)
Transport Wheels	Optional 2-wheel kit: P/N 06425-Z43-001AH	2 Wheel standard
Lifting Hook	N/A	Standard
Battery	N/A	N/A
Approximate Running Time (hrs.) / Tankful	5.1** / 12.1***	8.1** / 11.2****
Rated Fuel Consumption (litres/hr)	1.60**	2.90**
Noise Level dB(A) (1.5 m to 7 m)	69** / 61***	72**
Length (Without Handles and Wheels)	430 mm (16.9 in.)	681 mm (26.8 in.)
Length (With Handles and Wheels)	N/A	1,043 mm (41.1 in.)
Width (Without Handles and Wheels)	448 mm (17.6 in.)	530 mm (20.9 in.)
Width (With Handles and Wheels)	N/A	706 mm (27.8 in.)
Height (Without Lift-Hook)	481 mm (18.9 in.)	719 mm (28.3 in.)
Height (With Lift-Hook)	N/A	773 mm (30.4 in.) standard
Dry Weight	29.9 kg (65.9 lb.)	94.6 kg (208.6 lb.)
Cold Climate Technology™	Standard	Standard

Generator Specifications

	Premium Series			
Specifications	Commercial 6500 GFCI	Commercial 10000 GFCI ES	Electric Start 5000	Electric Start 6500
Model Code	EB6500	EB10000	EM5000S	EM6500S
Generator Type	Brush type	Brush type	Brush type	Brush type
Maximum AC Output (Watts)	6,500	10,000	5,000	6,500
AC Voltage Available	120 / 240	120 / 240	120 / 240	120 / 240
Maximum Continuous AC Output (Watts)	5,500 7,000 (iAVR)	9,000	4,500 7,000 (iAVR)	5,500 7,000 (iAVR)
Max. Rated AC Amperage @ 120 V / 240 V	45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR)	37.5 x 2 (75) / 37.5	37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR)	45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR)
Ground Fault Circuit Interrupter (GFCI)	Standard	Standard	N/A	N/A
Frequency (Hertz)	60	60	60	60
Automatic Voltage Regulator	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard DAVR (Digital Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)
DC Output Volts / Amps	N/A	N/A	12 / 8	12 / 8
Common Duplex Receptacle Specifications	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.
DC Receptacle Specifications	N/A	N/A	8 amps/12 VDC is available from these +/- thumb screw terminals. Important Note: AC and DC output can be used simultaneously on this series only. DC system uses floating N (Neutral) type.	8 amps/12 VDC is available from these +/- thumb screw terminals. Important Note: AC and DC output can be used simultaneously on this series only. DC system uses floating N (Neutral) type.
DC Charging Cable	N/A	N/A	Optional (P/N 32650-825-015)	Optional (P/N 32650-825-015)
High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps (5.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 30 amps at 120/240 VAC continuously. This receptacle (CS6364/5) will supply 37.5 amps (9 kVA) at 240 VAC or 50 amps (6 kVA) at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps (4.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps (5.5 kVA) at 240 VAC continuously.
Engine Type	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda GX630H OHV, 90° V-Twin design, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled
Displacement	389 cc	688 cc	389 cc	389 cc
Starting System	Manual recoil	Electric	Electric/recoil	Electric/recoil
Low Level Oil Alert™ System	Standard	Standard	Standard	Standard
Auto Throttle	Standard	Standard	Standard	Standard
Remote Start Capability	No	No	Optional	Optional
Fuel Tank Capacity	23.5 litres (5.17 Imp. gal.)	31 litres (6.82 Imp. gal.)	23.5 litres (5.17 Imp. gal.)	23.5 litres (5.17 Imp. gal.)
Transport Wheels	2 Wheel standard	2 Wheel standard	2 Wheel standard	2 Wheel standard
Lifting Hook	Standard	Standard	Optional (P/N 06810-Z22-A30ZA)	Optional (P/N 06810-Z22-A30ZA)
Battery	N/A	Standard	Standard (P/N 31500-MCR-J01)	Standard (P/N 31500-MCR-J01)
Approximate Running Time (hrs.) / Tankful	6.9** / 10.4****	5.4** / 7.9****	8.1** / 11.2****	6.9** / 10.4****
Rated Fuel Consumption (litres/hr)	3.40**	4.77**	2.90**	3.40**
Noise Level dB(A) (1.5 m to 7 m)	73**	72**	72**	73**
Length (Without Handles and Wheels)	681 mm (26.8 in.)	973 mm (38.3 in.)	681 mm (26.8 in.)	681 mm (26.8 in.)
Length (With Handles and Wheels)	1,051 mm (41.4 in.)	1,420/1,041* mm (55.1/41* in.)	1,043 mm (41.1 in.)	1,051 mm (41.4 in.)
Width (Without Handles and Wheels)	530 mm (20.9 in.)	552 mm (21.7 in.)	530 mm (20.9 in.)	530 mm (20.9 in.)
Width (With Handles and Wheels)	706 mm (27.8 in.)	703 mm (27.7 in.)	706 mm (27.8 in.)	706 mm (27.8 in.)
Height (Without Lift-Hook)	719 mm (28.3 in.)	695 mm (27.4 in.)	719 mm (28.3 in.)	719 mm (28.3 in.)
Height (With Lift-Hook)	773 mm (30.4 in.) standard	891 mm (35.1 in.) standard	773 mm (30.4 in.) optional lift hook	773 mm (30.4 in.) optional lift hook
Dry Weight	97.2 kg (214.3 lb.)	183 kg (403.4 lb.)	102.2 kg (225.3 lb.)	104.8 kg (231 lb.)
Cold Climate Technology™	Standard	Standard	Standard	Standard



At max. rated output (continuous) in Watts. *At 25% rated output (continuous) in Watts. ****At 50% rated output (continuous) in Watts. *Indicates handles in folded down position.

#1 SELLING PORTABLE GENERATOR BRAND IN CANADA

BASED ON TOTAL SALES FROM 2016-2021*

*Based on Traqline Canada Independent Market Share analysis of portable generator units sold in Canada from 2016-2021.



  Honda Outdoors   @HondaOutdoors

For optimum performance and safety, please read your owner's manual thoroughly before operating your Honda Power Equipment product. Specifications subject to change without notice. Models and colours may not be exactly as shown. Errors and omissions excepted. See your Honda Power Equipment retailer or honda.ca for full details. TMs - Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd.

Printed in Canada, 2022.

E21PEBRO

HONDA
honda.ca