



PROGRAM 2021/2022



FERRI[®]


SIMPLY. THE MOWER

WORLD LEADER IN MOWER TECHNOLOGY

www.ferri-america.com

LEGENDA

Features:

 standard


 option



TIH
Totality
Independent
Hydraulics



FLOAT
Floating
Head
Systems



Reversible
Rotor




MB
Mechanical
Breakaway



AHB
Hydraulic
Breakaway
with auto-return
system



Arm
Power
Slew



Cable
Controls



Electric
Controls



Oil Cooler
with
Thermostat



LIFT FLOAT
Lift Float
Kit



SAB
Roll-over
protection
system



Rear
Adjustable
Roller




Front
Adjustable
Guard



**PTO
SHAFT**
PTO Shaft



Tractor
Stabilizers



Direct Drive
Motor "High
Performance"




HP
Cast Iron
Worm
Gearbox



Prepared
beforehand
to work in
the rear position



OIL
Oil



LEFT RIGHT
Left and
right work



BOOM MOWERS

- 4 **T350S**
- 5 **T350SI**
- 6 **T250A - T320A**
- 7 **T380D - T430D** *Smart*
- 8 **T460** *Smart*
- 9 **TM** *Farm*
- 10 **TP** *Farm*
- 11 **TXV** *Vision Energy*

MOWERS

- 12 **MT**
- 13 **MKD** *Front and rear mower*

OFFSET / IN-LINE SLOPE MOWERS

- 14 **ZME** *Central and offset mower*
- 15 **ZMGE** *Central and offset mower*
- 16  **ZMTE PRO** *Central and offset mower*
- 17 **ZTE** *Central and offset mower*
- 18  **ZLE PRO** *Central and offset mower*
- 19 **ZHE** *Central and offset mower*

HYDRAULIC FLAIL HEADS FOR MINI-LOADERS



- 20 **TSKID**

ATTACHMENTS

- 21 **Implements**
- 22 **Controls**
- 23 **Hydraulic Flail heads**
- 23 **Professional Flail heads**

BOOM MOWERS
with hedges cutterbar
for green area light green
maintenance

T350S

T350S  15 to 50 HP/1543 lbs  11' 10"





Left hand operation



BOOM MOWERS with hedges cutterbar for green area light green maintenance

T350SI

T350SI  25 to 50 HP/1984 lbs  11' 10"



Left hand operation









BOOM MOWERS


for agriculture and light green maintenance

T250A

T320A



T250A	 20 to 35 HP/1543 lbs	 8'3"
T320A	 25 to 40 HP/1984 lbs	 10'7"
T320A/R	 25 to 40 HP/1984 lbs	 10'7"



Suitable for tractors with reversible drive.



BOOM MOWERS

for agriculture and light green maintenance

T380D

SMART

T430D

SMART



T380D Smart

T430D Smart

T430DR Smart



40 to 60 HP/3747 lbs



50 to 70 HP/4409 lbs



50 to 70 HP/4409 lbs



12' 7"



14' 2"



14' 2"



ELECTRA FULL



Legenda: see 2

Features:



standard



option

BOOM MOWERS

for agriculture and green areas

T460

SMART



T460 Smart

50 to 70 HP/4850 lbs 15' 1"



BOOM MOWERS

for agriculture and green areas



TM 46 FARM



50 to 70 HP/5512 lbs 15' 3"






BOOM MOWERS

for grounds maintenance



TP 510  60 to 80 HP/6614 lbs  15' 9"



TP 610  70 to 90 HP/7050 lbs  19' 5"





PROFESSIONAL BOOM MOWERS

for municipal grounds maintenance




TXV 50  80 to 100 HP/7500 lbs  17' 2"

TXV 60  90 to 110 HP/8000 lbs  20' 6"



Good View on Flail Head



Legenda: see 2

Features:

 standard









 option

MOWERS

for agriculture and green areas



For grass
and twigs

MT 140		30 to 45 HP		4' 7"
MT 160		35 to 50 HP		5' 3"
MT 180		45 to 60 HP		5' 10"
MT 200		50 to 70 HP		6' 6"









FRONT AND REAR MOWERS

for agriculture and green areas



For grass and twigs

MKD 2300  75 to 130 HP  7' 6"
MKD 2500  85 to 130 HP  8' 2"
MKD 2800  95 to 130 HP  8' 11"



Max. modularity. Revolving upper 3 point linkage for front and rear mounting.



Legenda: see 2

Features:



standard









option

OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas





ZME 125  18 to 30 HP/1555 lbs  4' 1"  5' 9"

ZME 155  25 to 40 HP/2000 lbs  5' 1"  6' 8"



For compact tractors



Mechanical breakaway.






Rotor with internal sealed bearings







OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas



ZMGE 1400  40 to 70 HP/3527 lbs  4' 8"  8' 6"

ZMGE 1600  40 to 70 HP/3748 lbs  5' 4"  9' 2"



Gearbox unit outside the transmission cover (more offset and less PTO angle)

Extra Reach




OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas



ZMTE PRO 1600	60 to 80 HP/5291 lbs	5' 5"	9' 2"
ZMTE PRO 1800	60 to 80 HP/5291 lbs	6' 1/2"	9' 10"
ZMTE PRO 2000	70 to 80 HP/5732 lbs	6' 8"	10' 6"



Gearbox unit outside the transmission cover (more-side sliding)

Extra Reach




Mechanical block pin for transport (no chains or holders).

OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas




ZTE 2300 70 to 80 HP/6170 lbs 7'5" 10'9"



Hydraulic block tap side movements for transport with manual activation (no chains or holders).



Hydraulic block tap of flail head during transport (no chains or holders).



Gearbox unit outside the transmission cover (more-side sliding)

Legenda: see 2

Features:

standard










option


17

PROFESSIONAL OFFSET/IN-LINE SLOPE MOWERS

for municipal and green areas



ZLE PRO 1800  60 to 120 HP/6173 lbs  6'0"  9'11"
ZLE PRO 2000  70 to 120 HP/6620 lbs  6'8"  10'6"
ZLE PRO 2300  80 to 120 HP/7050 lbs  7'6"  11'4"



Extra Reach



Gearbox unit outside the transmission for more homogeneous mulching.



Double skin mulching frame with inter-axial "Full Coverage" layer in Strenx 700




STRENX™
PERFORMANCE STEEL

OFFSET/IN-LINE SLOPE MOWERS

for professionals and green areas



ZHE 2500  100 to 160 HP/8818 lbs  8'2"  12'0"



Extra Reach




Gearbox unit outside the transmission cover (more-side sliding)



Hydraulic block valve for transport with automatic (no chains or holders).



Hydraulic block tap for transport with manual activation (no chains or holders).

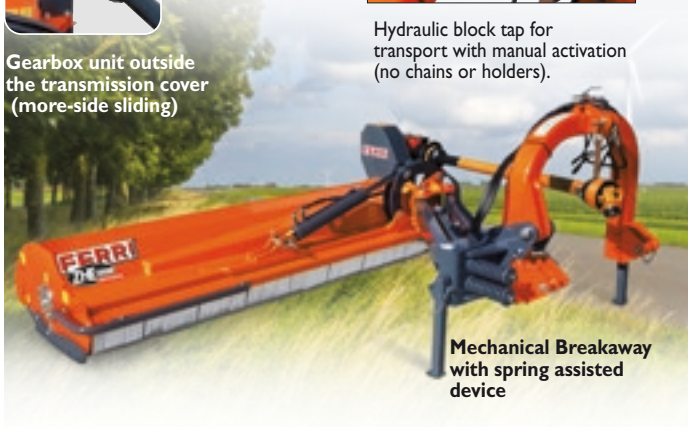

Mechanical Breakaway with spring assisted device



FLAIL HEADS for mini-loaders

TSKID



TSKID 1800
TSKID 2000



55 to 100 HP



71"



55 to 100 HP



79"



PTO
SHAFT



INTERCHANGEABLE IMPLEMENTS

For hydraulic Boom Mowers



**CUTTER BAR
CS 150**
Max CUT 1/2".
Width of cut: 59"



CUTTER BAR CSP 150
Max CUT 1/2".
Width of cut: 59"



**CUTTER BAR TR 13
TR 22**
Max CUT 3 1/4".
Width of cut:
51" (TR 13).
87" (TR 22).



**DITCH CLEANER
FF45 - FF60**
For the maintenance of
ditches.
Width 18" & 24".

CONTROLS



Classic

Cable controls. Reliability and simply use (standard).



Electra Full

Monolever electric control with rotor's electric switch.



Simple Proportional Tronic

Proportional electric control with 3 proportional functions, electric starter of the hedgetrimmer, emergency stop and automatic control of the inclination of the hedgetrimmer bar by means of a button on the joystick.



Comfort

Electro-hydraulic proportional controls. The 2 hydraulic distributors are controlled and operated by a mixed system. The Joystick runs the hydraulic low pressure proportional movements of the first and second arm.



Proportional electrical control with electric rotor management.

The EP Tronic control allows for easy portability of the cab control thanks to a light joystick and the lack of hydraulic hoses.

HYDRAULIC FLAIL HEADS

PROFESSIONAL HYDRAULIC FLAIL HEADS

TME 60

 24"
 154 lbs

T250A

TME 80

 31"
 176 lbs

T320A



TID 100

 39"
 284 lbs



T380D
SMART

T430D
SMART

T460
SMART



TI 120

 47"
 463 lbs



TM
FARM

TP
FARM



TN 120 PROFESSIONAL

 47"
 628 lbs



TXV




World Leader In Mower Technology



FERRI[®]

Company

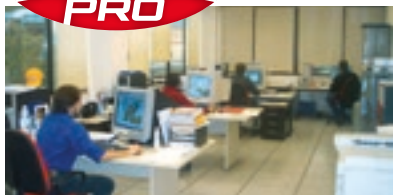

FERRI[®]

Engineering



FERRI[®]

Manufacturing



FERRI[®]

Genuine
Spare Parts



FERRI[®]



FERRI srl - Via C.Govoni, 30 - 44034 Tamara (FE) Italy
Tel. 011-39-0532.866866 - Fax 011-39-0532.866851
www.ferrisrl.it - info@ferrisrl.it

North America Sales and Marketing Manager/FERRI

Ronald E. Roglis
Glenarm, Illinois 62536
Cell (314) 422-9460
Fax (217) 483-4123
ron.roglis@gmail.com

Parts Stock / FERRI:

J.S. Woodhouse Co., Inc.
1314 Union Street
P.O. Box 1169
West Springfield, Ma. 01090 U.S.A.
tel. 413-736-5462
fax 413-732-3786
info@jswoodhouse.com

Dealer: