

HIGHWAY LIGHT PACKAGE RECOMMENDED FOR ON ROAD TRANSPORT LIGHTING SPECIFICATIONS

CUSTOMER TO SUPPLY A 7-PIN MALE & FEMALE PLUG OFF OF THE REAR OF THE CAB FOR LIGHT HOOK UP TO IMPLEMENT, LOCATED CENTRALLY BEHIND THE CAB. ORDER PART #56-0005-2 & 56-0014-1 FROM MEYER MANUFACTURING CORPORATION



HYDRAULIC SPECIFICATIONS-TRUCK WET KIT PROVIDED BY CUSTOMER

9100 DUAL DRIVE

40 GPM @ 1,500 TRUCK ENGINE RPM

3,500 PSI PEAK PRESSURE W/RELIEF VALVE INSTALLED & SET AT 3500 PSI 45-50 GALLON RESERVOIR FILLED W/40 GALLONS OF HYDRAULIC OIL

3/4" HOSES REQUIRED WITH 3/4" NPT MALE SWIVEL ENDS FOR HYDRAULIC HOOKUP

is located on the truck to provide safe weight distribution on the truck. Always follow Federal, State and local laws for lighting, weight and operation. Be sure box Select truck with axle, frame and horsepower configurations that match box capacities.

		1			?			
QUAD AXLE	288"	117"	387"	24"	363"	202"	14"	9130
QUAD AXLE	280"	109"	371"	24"	347"	194"	14"	9128
QUAD AXLE	264"	93 <u>''</u>	339'	24"	315"	178"	14"	9126
TRI AXLE	N A	115"	339'	24"	315"	200'	14"	9126
TANDEM	N A	NA A	323 "	24"	299"	194"	14"	9124
SUGGESTED AXLE	G	F	Е	D	С	В	Α	SIZE

SCALE EQUIFFED INUCAS


damage frame strength due to concentrations of load. All scale equipped units require a double framed truck. Noncompliant frame specifications will void Meyer warranty for related Truck/Box combinations equipped with optional scale packages require additional truck

S

4

ယ

 \sim

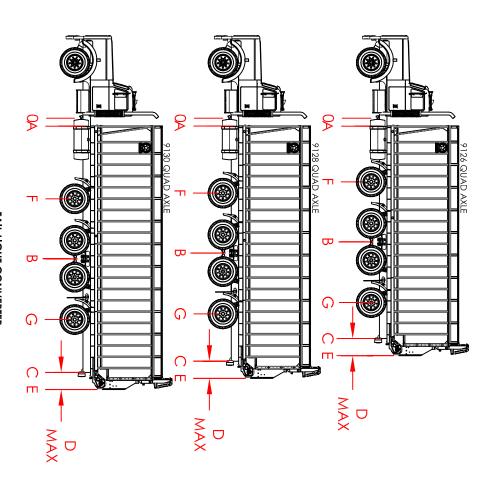

TAIL LIGHT CONVERTER

BRAKE LIGHTS TO OPERATE ACCORDING TO DOT LIGHTING REGULATIONS. DEPENDING ON MAKE AND MODEL OF TRUCK IT MAY BE NECESSARY TO INSTALL A LIGHT CONVERTER, MEYER #56-0028. CONVERTER ALLOWS SIGNAL LIGHTS AND

WRITTEN PERMISSION OF MEYER MFG CORP IS PROHIBITED.	MEYER MFG CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF	FRAC ANGI TWO PL THREE PL	t DIMENS DINLESS OTI	CHECKED	DRAWN BY	
IS PROHIBITED.	RP. ANY REPR	PROPRIETARY AND CONFIDENTIAL INFORMATION CONTAINED IN T AWING IS THE SOLE PROPERTY C	FRACTIONAL ± 1/32" ANGULAR: BEND ± 0.5° TWO PLACE DECIMAL ± 0.02" THREE PLACE DECIMAL ± 0.005"	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES:		JAA	NAME
MFG CORP.	ODUCTION OUT THE	ENTIAL ED IN THIS ERTY OF	32" 0.5° ± 0.02" ± 0.005"	CIFIED: NCHES		4/11/2017	DATE
SCALE: 1:1 WT: XX.XX SHEET 1 OF 1	A SPECIFICATIONS -	SIZE DWG. NO. RE 9100 RT TRUCK MOUNT	9100 RT TRUCK MOUNT HYDRAULIC SPECIFICATIONS	TITLE:	MATERIAL:		MEVER MEC CORP
Ť 1	•	REV.					