

## FUGLEMAN WINDSHIELDS

### ASSEMBLY AND INSTALLATION INSTRUCTIONS

#### FRONT WINDSHIELD



#### STEP 1: GASKET INSTALLATION


a) Remove protective layer along the contour of the front windshield.



b) Apply dishwasher soap mixed with water inside the C channel of the gasket.

This will make it easier to insert.

c) Starting at the bottom, insert gasket along the contour. Cut any surplus to have a good fit between both ends.

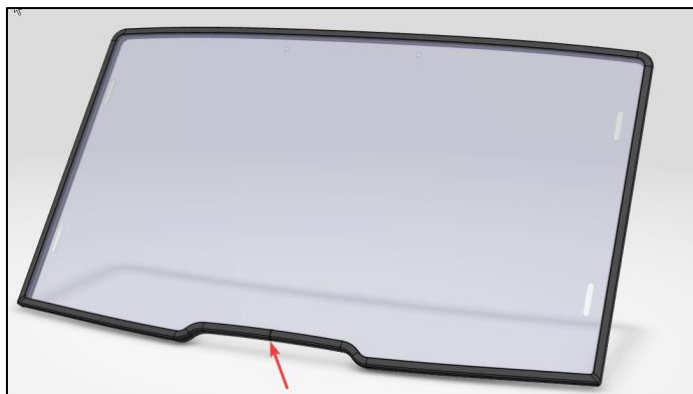


## STEP 2: WINDSHIELD INSTALLATION

a) Install the windshield on the ATV and remove protective layer



b) Install the 4 straps and blocks

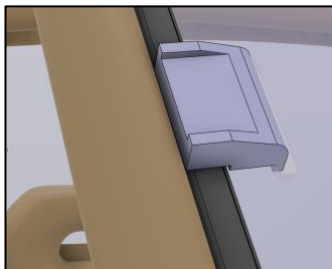

c) Install the two brackets on top of the windshield

d) Tighten to 10 ft lbs

## BACK WINDSHIELD




### STEP 1: GASKET INSTALLATION

a) Remove upper center clip





b) Remove protective layer along the contour of the back windshield

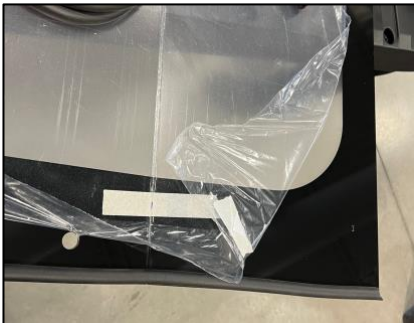

c) Remove approximately 6 inches of the liner on the gasket



d) Starting with the bottom section, apply the 3 gaskets (see below picture for positioning and measurement)

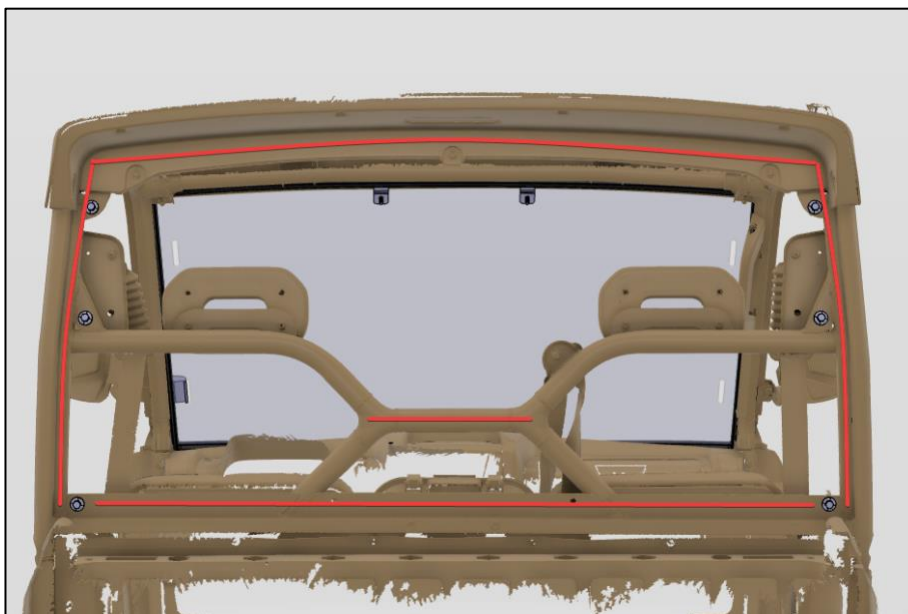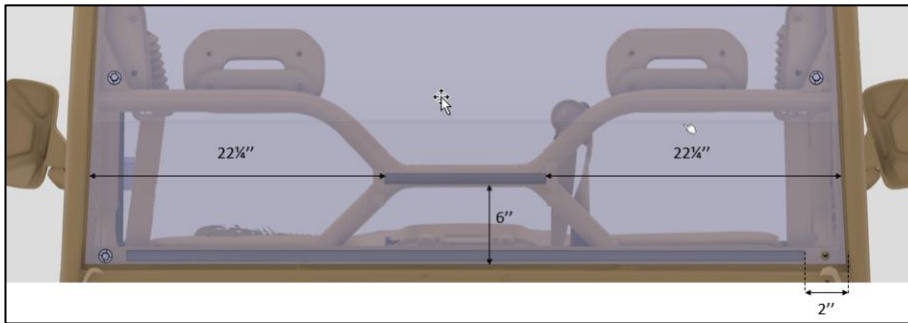

## STEP 2: WINDSHIELD INSTALLATION

- a) Install the windshield on the ATV
- b) Install hardware (6 X M8-1.25 X 45 SS18-8 and 1 X HEX. HEAD CAP SCREW M6-1 X 45 SS18-8)



- c) Tighten so that the gasket is fully pressed against the frame.  
Do not overtightened!