


**160-173-100**

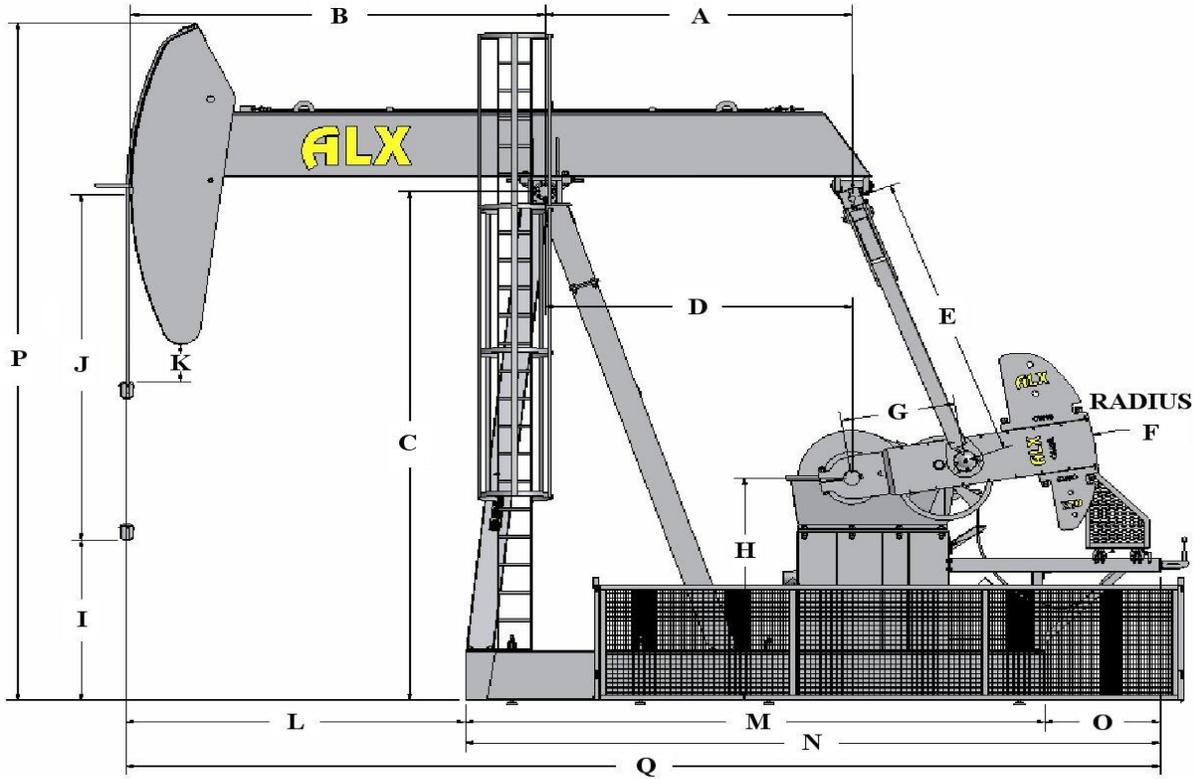

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	BACK WIDTH	FRONT WIDTH	OVERALL WIDTH
98.50	129.00	191.50	98.50	110.75	76.00	37.00	78.00	60.00	#####	15.25	#####	193.75	236.75	43.00	254.75	339.25	27.50	72.00	77.25

**EFFECTIVE COUNTERBALANCE DATA**

Weight Combination	Counter Balance Effect
Crank Only	3601
2 #13	5567
2 #15	7187
4 #13	7534
2 #16	8449
2 #13 + #15	9153
2 #13 + #16	10416
4 #15	10773
2 #15 + #16	12036
4 16	13298

**GENERAL ENGINEERING DATA**

Peak Torque Rating, API	160,000 in-lbs
Polish Rod Capacity	17,300 lbs
Stroke Lengths	100",85",72"
Walking Beam Size	24"@117 lbs
Reducer Model	T160
Reducer Ratio	28.506
Input Shaft Size	2.625
Max. Sheave Diameter	30" 4C
Belts for Std High Mount	C195
Oil Capacity	105L
Structural Unbalance	287 lbs
Gear Box Weight	5060 lbs
Total Weight	* 21411 lbs

\* NOT INCLUDING COUNTER WEIGHT

Counter Weights	Weight	Crank Arm	Weight
#13	738 lbs	R32	2040 lbs
#15	1494 lbs		
#16	2100 lbs		

**GET PUMPED UP AT "WWW.ALXJACKS.COM"**



### STANDARD EQUIPMENT

- \* High Mount Assembly
- \* Bendix Style Brake
- \* Mesh Crank Arm Guards
- \* Bridle Assembly
- \* Single Rail Tie Down Bars
- \* Adjustable Motor Rails
- \* 2 Ladders With Safety Cages
- \* Cable Fall Restraint
- \* Wrist Pin Wrench
- \* Gear Oil Fill
- \* T Bolts
- \* Painted Black & Safety Yellow

### OPTIONAL EQUIPMENT

- \* Counter Balance Weights
- \* Electric Motors
- \* Triple Rated Electric Motors
- \* Low Oil Level Switch
- \* Full Guard With Mesh
- \* Fiberglass Full Guard
- \* Concrete Bases
- \* Colour Options
- \* Low Mount Brake Cables
- \* Low Mount Engine Rails
- \* Drive Sheave & Belts
- \* Vibration Switches
- \* Central Lubrication
- \* Full Guard Enclosed
- \* Partial Belt Guard
- \* Pressure Treated Stripping
- \* Low Mount Brake Mount
- \* Speciality Lube Oils

### CONSTRUCTION FEATURES

- \* Manufactured To API 11E Specifications
- \* CWB Welded To W48
- \* Mono Gear Box Mounting Plate
- \* Three Leg Sampson Post - Removable Third Leg
- \* Saddle Bearing - Double 6" x 11" Railroad Style
- \* Split Case Gear Boxes
- \* Replaceable Wrist Pin Sleeves
- \* Hangar Style Rear Equalizer
  - \* Pitman Arm Utilize Brass Bearings For Quiet Operation
- \* Common Off The Shelf Bearings and Seals

## ALX PUMPING UNITS

#### **Please Call For Quote:**

ALX Sales Canada: 1-866-ALX-JACK (259-5225)

#### **Address:**

**ALX Plant**  
521 6th Street  
Estevan, SK  
S4A-1A4

**Corporate Office**  
P.O. Box 695  
Estevan, SK  
S4A-2A6

**Date: January 15, 2022**

**GET PUMPED UP AT "WWW.ALXJACKS.COM"**