




Artificial
Lift
XWerx Ltd.

320-256-120

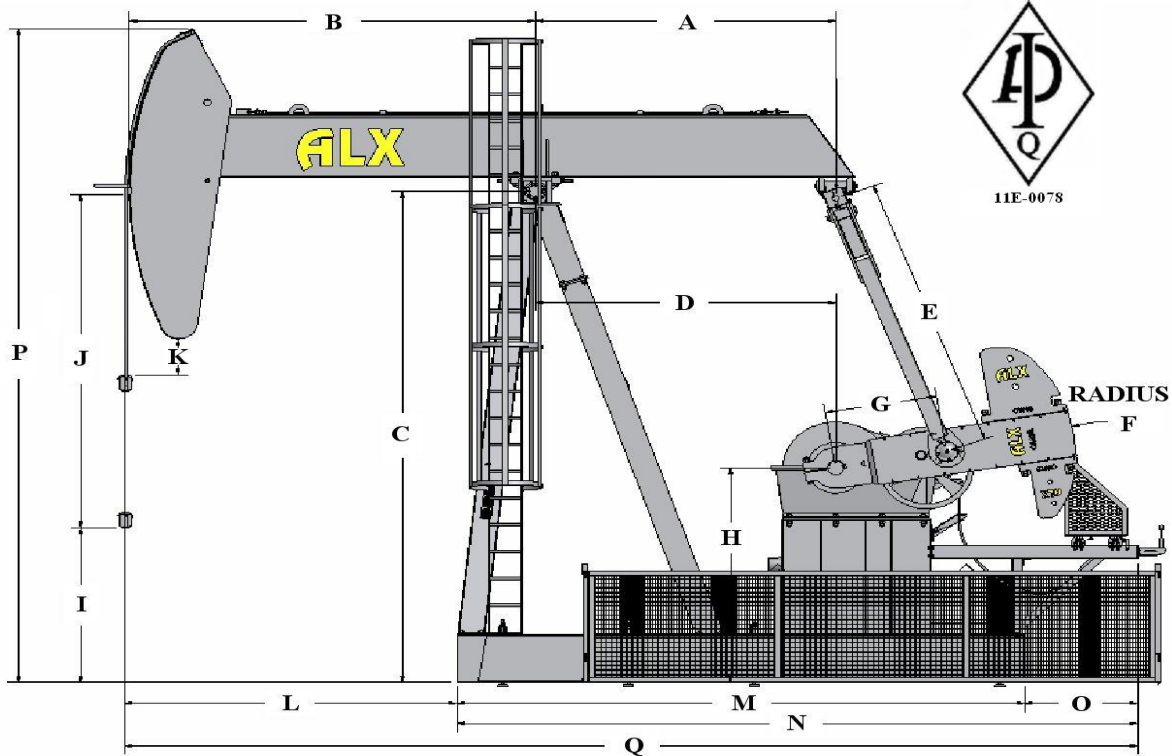

GENERAL DIMENSIONS

| A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | BACK WIDTH | FRONT WIDTH | OVERALL WIDTH |
|--------|--------|--------|--------|--------|-------|-------|-------|-------|--------|-------|--------|--------|--------|-------|--------|--------|---------------|----------------|------------------|
| 114.50 | 155.00 | 215.50 | 114.50 | 118.75 | 92.00 | 43.00 | 94.00 | 67.75 | 120.00 | 16.00 | 125.50 | 216.00 | 259.75 | 43.00 | 286.50 | 385.00 | 32.50 | 72.00 | 83.00 |

EFFECTIVE COUNTERBALANCE DATA

| Weight Combination | Counter Balance Effect |
|--------------------|------------------------|
| Crank Only | 5761 |
| 2 #13 | 7819 |
| 2 #15 | 9597 |
| 4 #13 | 9877 |
| 2 #16 | 10992 |
| 2 #13 + #15 | 11655 |
| 2 #13 + #16 | 13050 |
| 4 #15 | 13432 |
| 2 #17 | 13891 |
| 2 #15 + #16 | 14828 |
| 2 #13 + #17 | 15949 |
| 4 #16 | 16223 |
| 2 #15 + #17 | 17727 |
| 2 #16 + #17 | 19122 |
| 4 #17 | 22021 |

GENERAL ENGINEERING DATA

| | |
|--------------------------|-----------------|
| Peak Torque Rating, API | 320,000 in-lbs |
| Polish Rod Capacity | 25,600 lbs |
| Stroke Lengths | 120", 105", 90" |
| Walking Beam Size | 27" @ 146 lbs |
| Reducer Model | T320 |
| Reducer Ratio | 28.8 |
| Input Shaft Size | 3.625 |
| Sheave Diameter | 44.375 5C |
| Belts for Std High Mount | C195 |
| Oil Capacity | 140L |
| Structural Unbalance | -301 lbs |
| Gear Box Weight | 8560 lbs |
| Total Weight | * 30595 lbs |

* NOT INCLUDING COUNTER WEIGHT

| Counter Weights | Weight | Crank Arm | Weight |
|-----------------|----------|-----------|----------|
| #13 | 738 lbs | R43 | 3500 lbs |
| #15 | 1494 lbs | | |
| #16 | 2100 lbs | | |
| #17 | 3500 lbs | | |

GET PUMPED UP AT "WWW.ALXJACKS.COM"



STANDARD EQUIPMENT

- * High Mount Assembly
- * Bendix Style Brake
- * Mesh Crank Arm Guards
- * Bridle Assembly
- * Single Rail Tie Down Bars
- * Adjustable Motor Rails
- * 2 Ladders With Safety Cages
- * Cable Fall Restraint
- * Wrist Pin Wrench
- * Gear Oil Fill
- * T Bolts
- * Painted Black & Safety Yellow

OPTIONAL EQUIPMENT

- * Counter Balance Weights
- * Electric Motors
- * Triple Rated Electric Motors
- * Low Oil Level Switch
- * Full Guard With Mesh
- * Fiberglass Full Guard
- * Concrete Bases
- * Colour Options
- * Low Mount Brake Cables
- * Low Mount Engine Rails
- * Drive Sheave & Belts
- * Vibration Switches
- * Central Lubrication
- * Full Guard Enclosed
- * Partial Belt Guard
- * Pressure Treated Stripping
- * Low Mount Brake Mount
- * Speciality Lube Oils

CONSTRUCTION FEATURES

- * Manufactured To API 11E Specifications
- * CWB Welded To W48
- * Mono Gear Box Mounting Plate
- * Three Leg Sampson Post - Removable Third Leg
- * Saddle Bearing - Double 6" x 11" Railroad Style
- * Split Case Gear Boxes
- * Replaceable Wrist Pin Sleeves
- * Hangar Style Rear Equalizer
 - * Pitman Arm Utilize Brass Bearings For Quiet Operation
- * Common Off The Shelf Bearings and Seals

ALX PUMPING UNITS

Please Call For Quote:

ALX Sales Canada: 1-866-ALX-JACKS (259-5225)

Address:

ALX Plant
521 6th Street
Estevan, SK
S4A-1A4

Corporate Office
P.O. Box 695
Estevan, SK
S4A-2A6

Date: January 15, 2022

GET PUMPED UP AT "WWW.ALX.COM"