




**Artificial
Lift
XWerx Ltd.**

456-305-144

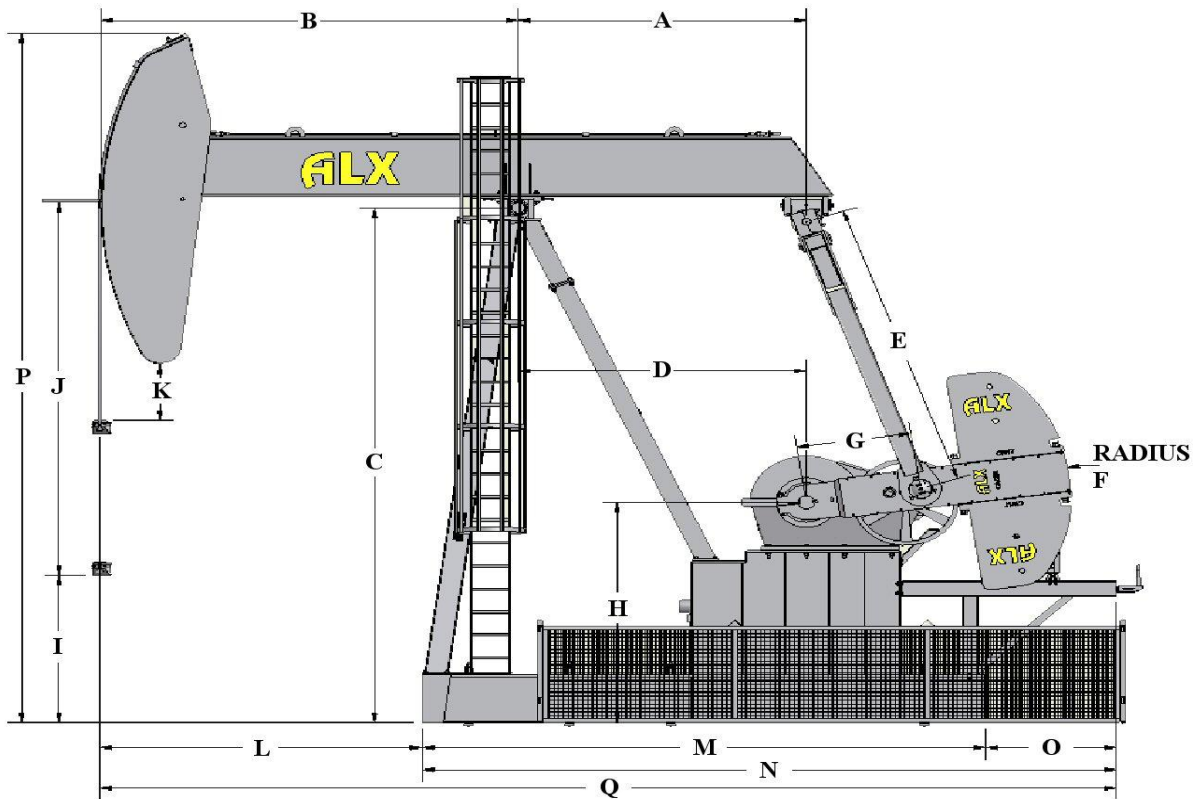

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	BACK WIDTH	FRONT WIDTH	OVERALL WIDTH
120.00	173.50	262.00	120.00	144.00	110.00	48.00	112.00	75.00	144.00	29.50	134.00	235.00	289.00	54.00	351.00	423.25	33.50	72.00	97.25

EFFECTIVE COUNTERBALANCE DATA

Weight Combination		Counter Balance Effect
Crank Only		6379
2	#15	10373
2	#16	11859
4	#15	14367
2	#17	15021
2	#15 + #16	15853
4	#16	17339
2	#15 + #17	19015
2	#18	18900
2	#16 + #17	20501
2	#15 + #18	22894
4	#17	23662
2	#16 + #18	24380
2	#17 + #18	27542
4	#18	31421

GENERAL ENGINEERING DATA

Peak Torque Rating, API	456,000 in-lbs
Polish Rod Capacity	30,500 lbs
Stroke Lengths	144", 123", 103"
Walking Beam Size	30" @ 173 lbs
Reducer Model	T456
Reducer Ratio	28.36
Input Shaft Size	4.000
Sheave Diameter	44.375" 5C
Belts for Std High Mount	C210
Oil Capacity	285L
Structural Unbalance	379 lbs
Gear Box Weight	10340 lbs
Total Weight	* 40436 lbs

* NOT INCLUDING COUNTER WEIGHT

Counter Weights	Weight	Crank Arm	Weight
#15	1494 lbs	R37	2040 lbs
#16	2100 lbs		
#17	3500 lbs		
#18	5300 lbs		

GET PUMPED UP AT "WWW.ALXJACKS.COM"



456-305-144

STANDARD EQUIPMENT

- * High Mount Assembly
- * Bendix Style Brake
- * Mesh Crank Arm Guards
- * Bridle Assembly
- * Dual Rail Tie Down Bars
- * Adjustable Motor Rails
- * 2 Ladders With Safety Cages
- * Cable Fall Restraint
- * Wrist Pin Wrench
- * Gear Oil Fill
- * T Bolts
- * Painted Black & Safety Yellow

OPTIONAL EQUIPMENT

- * Counter Balance Weights
- * Electric Motors
- * Triple Rated Electric Motors
- * Low Oil Level Switch
- * Full Guard With Mesh
- * Fiberglass Full Guard
- * Concrete Bases
- * Colour Options
- * Low Mount Brake Cables
- * Low Mount Engine Rails
- * Drive Sheave & Bolts
- * Vibration Switches
- * Central Lubrication
- * Full Guard Enclosed
- * Partial Belt Guard
- * Pressure Treated Stripping
- * Low Mount Brake Mount
- * Speciality Lube Oils

CONSTRUCTION FEATURES

- * Manufactured To API 11E Specifications
- * CWB Welded To W48
- * Mono Gear Box Mounting Plate
- * Three Leg Sampson Post - Removable Third Leg
- * Saddle Bearing - Double 6" x 11" Railroad Style
- * Split Case Gear Boxes
- * Replaceable Wrist Pin Sleeves
- * Hangar Style Rear Equalizer
- * Pitman Arm Utilize Brass Bearings For Quiet Operation
- * Common Off The Shelf Bearings and Seals

ALX PUMPING UNITS

Please Call For Quote:

ALX Sales Canada: 1-866-ALX-JACK (259-5225)

Address:

ALX Plant
521 6th Street
Estevan, SK
S4A 1A4

Corporate Office
P.O. Box 695
Estevan, SK
S4A-2A6

Date: January 15, 2022

GET PUMPED UP AT WWW.ALXJACKS.COM