## **T25**

Sub-Compact, Series 2 24.7 hp





# Packed with features to help accomplish your goals

Get work done quicker with this small-frame tractor. Highly maneuverable and with maximized lift capabilities, the T25 is designed to be an all-round multi-tasking machine.



1. 2 range hydrostatic tranmission (HST)



4. Bluetooth speaker with IP66 grade waterproofing







6. Wide loadspace with a wellequipped toolbox



2. 3rd function for 4in-1 bucket work



3. USB 2 port






#### Superior operator amenities for greater productivity

Fully equipped with modern amenities to maximize operator comfort, this tractor is complete with a large cup holder, wireless smartphone charging dock, multiple USB ports to charge personal devices and a bluetooth speaker. These features are designed to promote productivity, keeping drivers hydrated, connected and alert during every job.



#### Customizable rear accessories to meet a variety of needs

Attached to the right and left verticals on the foldable ROPS structure, this tractor features a modular system with three slot for lights, work lamps and speakers. Based on operator preference and working conditions, more speakers and lamps can be attached. This brings operators comfort and security in daylight or at night.

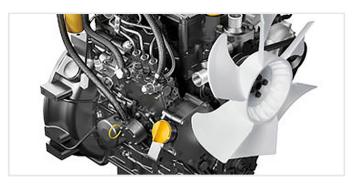

#### High torque, water-cooled Yanmar diesel engine

The Japanese made Yanmar engine offers more torque with less revs compared to competitors in its class. Since it is water cooled, the engine warms up faster and stabilized temperature more effectively while the tractor is running. The engine is also Tier 4 certified, including for noise emission standards.



#### Upgraded detailing to reduce operator effort

Packed with value-added features to enhance ease of operation, including a new fuel cap design to enhance grip and reduce manual effort and a brighter meta panel engineered to enhance operator awareness.



High capacity fuel tank to support time intensive work

The high capacity fuel tank allows drivers to take on jobs for longer periods without stopping for fuel. This is in addition to the engine, which promotes fuel-efficient operation and increases the time before a refuel.



#### Comfortable and secure seating for confident operation

In addition to a standard retractable seatbelt and cushioning, the seat of this tractor can hold over 400 lb (190 kg) and is equipped with a heavy duty mechanical suspension. While the seat provides comfort, the suspension acts as a buffer on uneven ground, keeping the operator secure in situations where there is risk of impact to the lower back. The seat can also be manually adjusted for weight, enabling operators to have the most optimal seating position.

### Technical specifications

ENGINE	
Engine manufacturer	Yanmar 3TNV80F
Gross engine power	24.7 hp
Туре	Natural Aspiration
PTO power	18.3 hp   13.6 kW
Rated engine speed	3000 rpm
No. of cylinders	3
Displacement	77.3 cu. in.   1267 cc
Air cleaner	Single Dry
Alternator	12V, 40A
Fuel system	IDI

r det system	IDI
HYDRAULIC SYSTEM	
Pump type	Single Gear Pump
Implement flow	4.18 gpm   15.82 l/min
Steering flow	2.77 gpm   10.49 l/min
Total flow	6.95 gpm   26.31 l/min
Category, 3-point hitch	I
Hitch lift capacity	1534 lb   696 kg
Hitch lift capacity at 24 inches behind link ends	1102 lb   500 kg
Lift control type	Position
No. of standard remote valves	Optional (1)
STANDARD TIRES	
Industrial - Front	23x8.5-12
Industrial - Rear	12x16.5
Agricultural - Front	6.0-12
Agricultural - Rear	9.5-20
Golf Tires - Front	25x8.5-14
Golf Tires - Rear	36x12.5-15

POWERTRAIN	
Transmission type	HST
No. of speeds	Infinite 2 Range
Max. traveling speed	13.7 mph   22.1 kmph
Brakes	Wet Disc
Steering	Hydrostatic
Clutch	N/A
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	107.8 in.   2,740 mm
Overall width	52.8 in.   1342 mm
Wheelbase	61 in.   1550 mm
Height to top of ROPS	89.8 in.   2280 mm
Min. ground clearance	7.71 in.   196 mm
Min. turn radius with brakes	102.4 in.   2602 mm
Min. turn radius without brakes	109.5 in.   2782 mm
Weight with ROPS	1881 lb   853 kg
Weight with cab	2399 lb   1088 kg
CAPACITIES	
Fuel tank	6.6 U.S. gal.   25 L
Coolant	3.8 qt   3.6 L
Crankcase	2.9 qt   2.7 L
Transmission/Hydraulics system	5.8 U.S. gal   17 L
Front axle	4.7 qt   4.5 L
РТО	
PTO type	Independent
PTO control	Electric/Hydro
PTO rear	540 rpm



## Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world