

SIMPLE AND EFFECTIVE

With the Typhoon™, you can instantly decide to go out boating: light and compact, it easily fits in the boot of your car.

THE “+” of the PRODUCT


A removable inflatable floor: inflated at high pressure, it is as rigid and less heavy than a traditional floor! An inflatable keel: it ensures a good heading hold and provides an extra buoyancy. Semi-recessed valve and swimming platform.

TECHNICAL FEATURES

EXTERNAL LENGTH (m-ft)	4.7 - 15'5"	AVERAGE RECOMMENDED POWER (kW)	23
INSIDE LENGTH (m-ft)	3.35 - 10'12"	MAXIMUM AUTHORIZED POWER (HP)	40
OVERALL BEAM (m-ft)	1.9 - 6'3"	MAXIMUM AUTHORIZED POWER (kW)	30
INSIDE BEAM (m-ft)	0.92 - 3'0"	MAXIMUM AUTHORIZED ENGINE WEIGHT (Kg-Lbs)	72 - 158
FLOAT DIAMETER (m-ft)	0.49 - 1'7"	MAXIMUM SPEED (MONO) (km/h - mph)	54-34
NUMBER OF PASSENGERS (ISO)	7	HULL LENGTH AT THE 1st BAG (tube) (m - ft)	1.42 - 4'8"
MAXIMUM AUTHORIZED LOAD (Kg-Lbs)	900 - 1984	HULL WIDTH AT THE 1st BAG (tube) (m - ft)	0.77 - 2'6"
TOTAL WEIGHT (Kg-Lbs)	110 - 243	HULL HEIGHT AT THE 1st BAG (Tube) (m - ft)	0.32 - 1'1"
NUMBER OF WATERTIGHT COMPARTMENTS	5+1	LENGTH OF THE 2nd BAG (floor) (m - ft)	1.2 - 3'8"
DESIGN CATEGORY	C	WIDTH OF THE 2nd BAG (floor) (m - ft)	0.8 - 2'7"
SHAFT	L	HEIGHT OF THE 2nd BAG (Floor) (m - ft)	0.16 - 0'6"
AVERAGE RECOMMENDED POWER (HP)	30		

VERSIONS

470 ALU

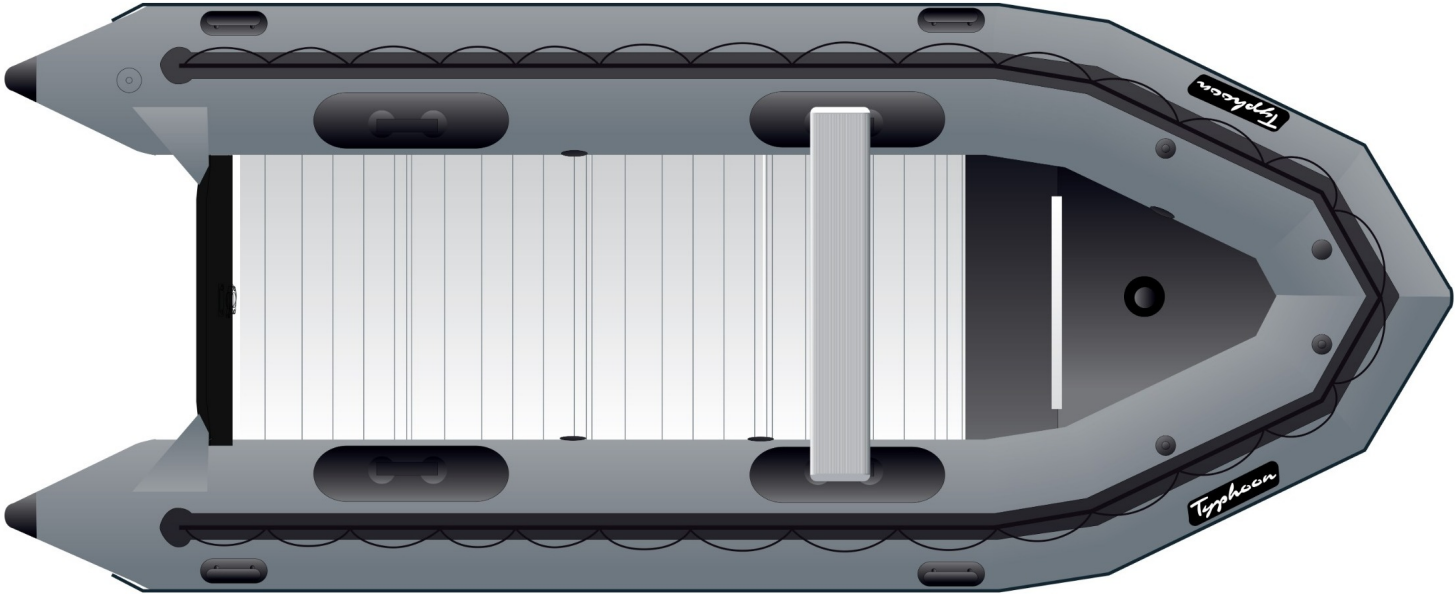

OPTIONS

HULL & DECK
Side rigid ladder

OTHER(S)
Launching wheels

Pressure indicator valve bravo 5

Taxes
Eco contribution France 4 à 4,99m pneumatiques