



# X-ONE

## AVAILABLE DECK SIZES

Engine	Deck Sizes
25HP* - Kohler® Command Pro®	52", 60"
27HP* - Kawasaki® FX850	54"RD, 60"RD, 52", 60", 72"
29.5HP* - Kawasaki® FX850 EFI	60", 72"
26HP* - Vanguard® 810cc w/ Oil Guard	60"




# X-ONE

**Fabricated Frame for Durability**  
1.5" x 3.0" steel frame making it tough and durable.



**VX™ Deck**  
Fabricated 7 ga. steel engineered for extreme vacuum to deliver an excellent after cut appearance.

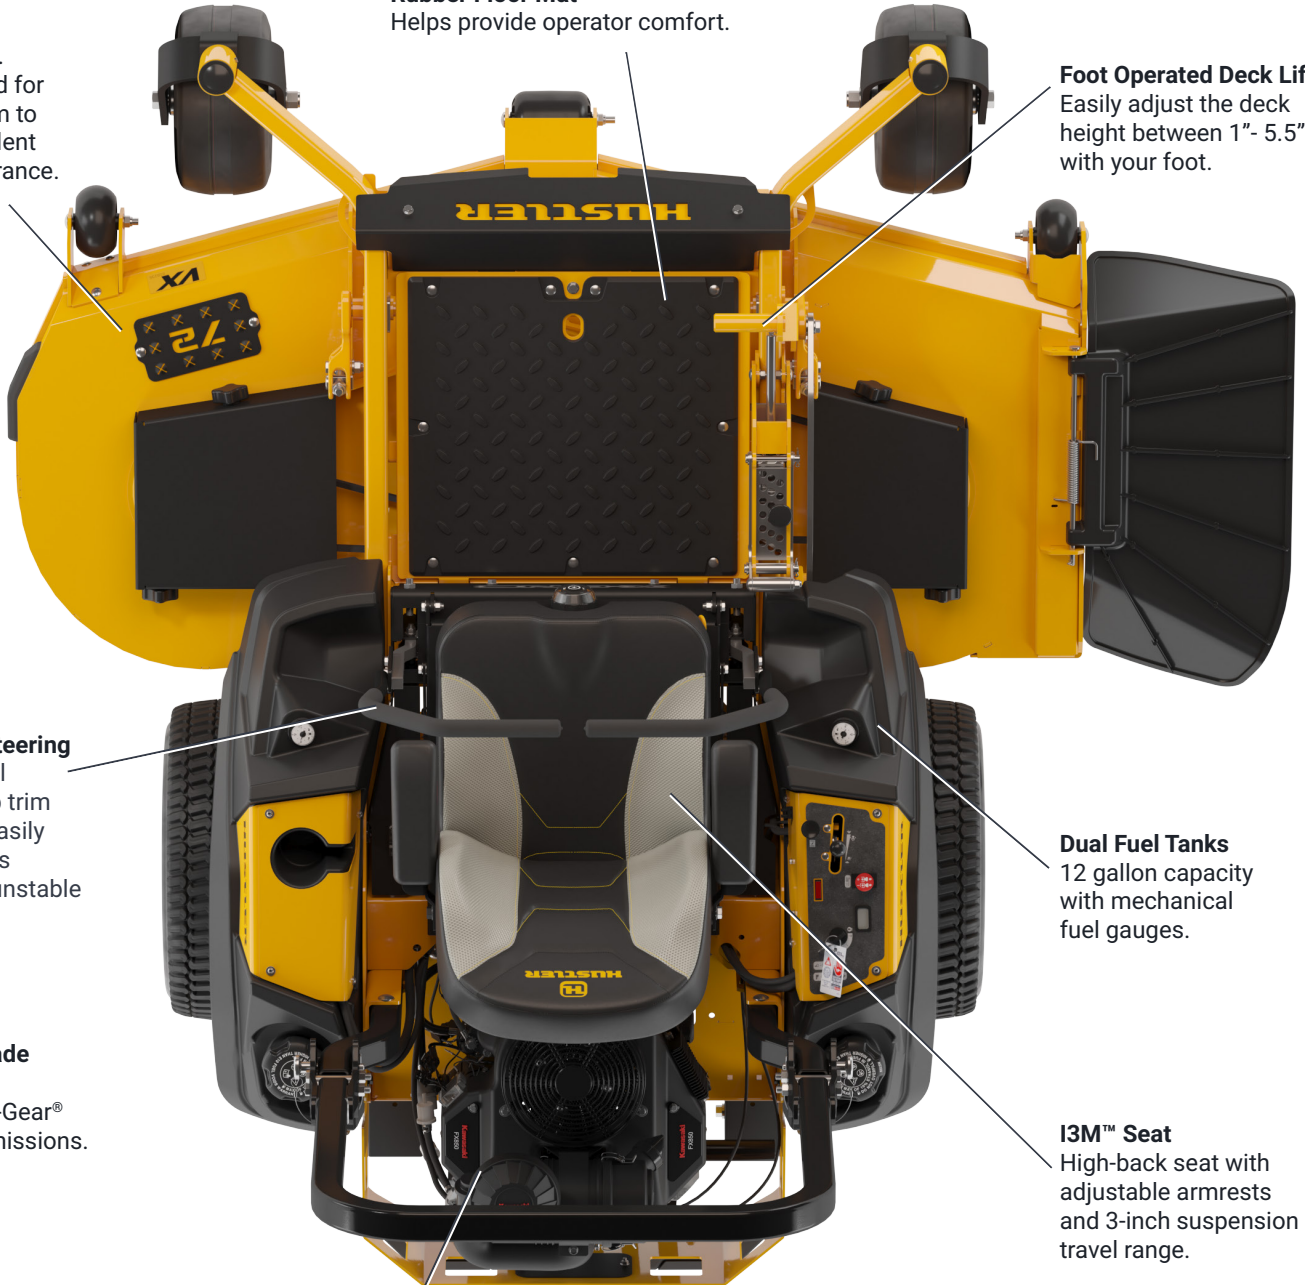

**Rubber Floor Mat**  
Helps provide operator comfort.

**Foot Operated Deck Lift**  
Easily adjust the deck height between 1" - 5.5" with your foot.

**SmoothTrak™ Steering**  
Precision control designed to help trim and maneuver easily around obstacles without feeling unstable or jerky.

**Dual Fuel Tanks**  
12 gallon capacity with mechanical fuel gauges.

**Commercial-grade Torque**  
Driven by Hydro-Gear® ZT-4400® transmissions.

**I3M™ Seat**  
High-back seat with adjustable armrests and 3-inch suspension travel range.

**Commercial-Grade Engines**  
Kawasaki® FX, Kohler® Command Pro® and Vanguard® Engine options backed by 3 year limited warranties.

LIMITED WARRANTY

**5** YEAR | **1200** HOUR

FIRST 2 YEARS NO HOUR LIMIT

## MORE FEATURES



Dual USB Port



Fabricated Step Tread



7 ga. Engine Guard

### VX™ Deck Technology

Designed to draw the grass into the mower blades resulting in a crisp and clean after cut appearance.

- Made with 7 ga. steel and with 7 ga. wrappers.
- Front edge protected by 11 ga. Formed channel with rolled edge.
- Ductile cast iron spindles with steel shaft and sealed ball bearings.
- Reinforced 7 ga. stamped disc spindle mounts.



## ACCESSORIES

(Each sold separately)

- ▶ Semi pneumatic front tires
- ▶ Steering lever extension kit
- ▶ Deck rear anti-scalp wheels
- ▶ 3-bag grass catcher (12 bushels)
- ▶ BacVac bagger (10 bushels)
- ▶ Mesh side bagger (3 bushels)
- ▶ Side Fabric bagger (3.5 bushels)
- ▶ Metal side bagger (3.5 bushels)
- ▶ Side Aluminum bagger (3.5 bushels)
- ▶ Flex Forks®
- ▶ Mulch kit
- ▶ Light kit
- ▶ Stripe kit
- ▶ Electric deck lift
- ▶ Hitch kit
- ▶ Michelin® X® Tweel® Turf
- ▶ Michelin® X® Tweel® Caster



## X-ONE®

ENGINE	
Manufacturer	Kawasaki® FX series, Kohler® Command Pro®, Vanguard®
HP	52", 60": 25HP* - Kohler® Command Pro® 54"RD, 60"RD, 52", 60", 72": 27HP* - Kawasaki® FX850 60", 72": 29.5HP* - Kawasaki® FX850 EFI 60": 26HP* - Vanguard® 810cc w/ Oil Guard (Per SAE J1995)
Displacement	FX850, FX850 EFI: 852cc • Command Pro®: 725cc • Vanguard®: 810cc
Cooling	Air cooled
Air Cleaner	Canister style
Engine Warranty	3 year limited
DRIVE SYSTEM	
Type	Dual hydrostatic
Transmission	Hydro-Gear® ZT-4400®
Hydraulic Cooling	Transmission mounted fans
Speed	Up to 12 mph
Parking Brakes	Integrated with steering levers
DECKS	
Cutting Width	Side discharge: 52", 60", 72" • Rear-discharge: 54", 60"
Cutting Heights	1" - 5.5"
Deck Lift	Foot operated
Depth	5.5"
Blades	3
Blade Length	52" deck: 17.86" • 54" RD deck: 18.50" 60", 60 RD deck: 20.50" • 72" deck: 23.86"
Blade Tip Speed	52": 17,700 • 54"RD: 18,300 • 60", 60" RD: 18,800 • 72": 18,500
Spindles	Ductile cast iron with steel shaft and sealed ball bearings
Drive	Electric PTO clutch
Construction	Fabricated 7 ga. with 7ga. wrappers
Spindle Mounts	Reinforced 7 ga. stamped disc
Impact/Trim Areas	Front of deck: 11 ga. formed channel with rolled edge
CONSTRUCTION	
Frame	1.5" x 3" steel tubing
Front Axle	Fabricated with tapered roller bearings
Front Caster Wheels	Tapered wheel bearings and debris cap
Front Caster Forks	Fabricated 1/2" steel
GENERAL	
Seat	I3M™ suspension seat
Fuel Capacity	Dual fuel tank w/ 12 gallon capacity
Cupholder	Yes
Front Tire	13 x 6.5 - 6
Drive Tire	52", 54" RD: 24 x 9.5 - 12 • 60", 60"RD, 72": 24 x 12 - 12
DIMENSIONS	
Weight	52": 1285 lbs • 54" RD: 1320 lbs • 60": 1290-1395 lbs 60"(Kohler®): 1290 lbs • 60"RD: 1350 lbs • 72": 1405-1425 lbs
Height	49" • 72.5 w/ ROPs
Length	52": 85.5" • 54"RD: 86.9" • 60": 84.4" • 60"RD: 86.5" • 72": 86.9"
Width w/Chute Up	52": 55.8" • 54"RD: 55.8" • 60": 61.6" • 60"RD: 61.7" • 72": 73.6"
Tire Width	52", 54"RD: 51" • 60", 60"RD, 72": 54.5"
Trim Side	52": 0.9" • 54"RD: 2.0" • 60": 5.1" • 60"RD: 3.2" • 72": 12"
PRODUCTIVITY**	
Acres Per Hour	52": 5.52 • 54"RD: 5.73 • 60", 60"RD: 6.36 • 72": 7.64

Specifications are subject to change without notice.

\* As rated by the engine manufacturer.

\*\* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

Kawasaki is a registered trademark owned by KAWASAKI JUKOGYO KABUSHIKI KAISHA. Kohler and Command Pro are registered trademarks owned by Kohler Co. Vanguard is a registered trademark owned by Briggs & Stratton Corporation. Hydro-Gear and ZT-4400 are registered trademarks owned by Hydro-Gear Limited Partnership. Michelin, X and Tweel are registered trademarks owned by COMPAGNIE GÉNÉRALE DES ÉTABLISSEMENTS MICHELIN.