



SNOW CONTROL



SNOWPLOWS

You put in the hours to finish what you start—and then do it all over again—to earn your place. You’ve dedicated your career to snow and ice management and control, and you deserve the utmost respect.

Founded on innovation in 1997, TrynEx International acknowledges those who put it all on the line by delivering the most dependable and low-maintenance equipment available. Designed by people who understand your business from first hand experience, we support doers with durable, technologically advanced equipment, an industry-leading warranty, and unrivaled customer service.

For the diligent and determined, those with a dream and the grit to make it reality, it’s time to **make your mark.**



Not Just Fast.

AUTOMATIC.

Automatixx
ATTACHMENT SYSTEM

When every minute matters, the revolutionary Automatixx® attachment system allows you to hook up your plow quickly and easily—all from the driver's side of the vehicle. Removable receiver brackets provide exceptional ground clearance when the plow is off the truck and a power-assisted attachment ensures you can hook up and get to work in no time.



1. PLUG IN

Plug in the electrical connections.

2. ACTIVATE

Activate the power attachment switches. The plow attaches and raises the stand in one fully automatic motion.

3. ENGAGE

Engage the pin lever to lock the plow onto the truck.



SECURITY GUARD™

Your equipment investment is protected by the SECURITY GUARD anti-theft system. Unlike physical locks that can be easily cut or removed, the system secures the plow by electronically synchronizing your control and plow module. This makes the plow inoperable for unauthorized users.

FLEETFLEX ELECTRICAL SYSTEM

Use any plow with one control on one truck. The FLEET FLEX electrical system features common programmable controls that allow true fleet interchangeability. The system offers easily installed wiring, hand-held or joystick options and a "soft-stop," one-touch float.

POWERCOAT

For a long-lasting, maintenance-free finish, our plows feature POWERCOAT, a baked-on, high-gloss powder coat formula that guards against weathering and corrosion. The advanced, multi-stage process includes surface prep, blasting, epoxy priming, and uniform coverage.

Unleash Your Plow's

SCRAPING POTENTIAL.



The Scape Maxx™ down-force kit—an exclusive feature on all SnowEx® truck plows—allows operators to apply downward force to bust through hard pack and maximize to-the-pavement scraping performance.

INCREASE DOWN-FORCE

The Scape Maxx kit makes our Light Truck and Regular-Duty straight blades act as heavier duty plows. It improves both back dragging and overall clearing abilities without the need to upgrade to a heavier plow or larger vehicle.

MORE POWER AT YOUR FINGERTIPS

Because the Scape Maxx kit utilizes abilities already built into our complete line of truck plows, installation and control are easy. Simply press and hold the down button on the plow control to engage, and the Scape Maxx feature does the rest.



BOOST BACK DRAGGING

For heavier snow plows, like the Heavy-Duty, SPEEDWING™, POWER PLOW™, and HDV™ models, the Scape Maxx kit provides optimum down-force to keep the blade against the surface, even over irregular terrain, making them ideal for back dragging jobs.



See What You've

BEEN MISSING.

/// **STORM SEEKER™ LED**
with **EdgeView™** TECHNOLOGY

See what you've been missing with STORM SEEKER™ LED headlights. Delivering up to twice the light output of halogen bulbs, these headlights offer 100% LED performance, and include the patented EdgeView™ technology, which employs unique side lamps to provide a full 180 degrees of light to maximize visibility from plow edge to plow edge.

SOLID OPTICS

Enhanced solid optic elements for both high and low beams place light exactly where it needs to be instead of relying on reflectors to aim the light as with many other halogen and LED headlights.

INTUITIVE HEATING SYSTEM

With the ability to sense the lens temperature, the intuitive heating system automatically turns on the heating elements when necessary to prevent snow and ice buildup.

ENGINEERED FOR EXTREMES


Headlights have undergone thorough testing to withstand extreme temperatures, vibration, impact, water submersion, corrosion, and shock. The result is a compact, completely sealed design built for the rigors of plowing.

ADVANCED LENS DESIGN

To help prevent ice bridging, the headlamp structure is designed with a forward sloped lens and has no bezel, a common point for ice to start building up on other headlights.

SUPERIOR VISIBILITY

STORM SEEKER LED headlights provide a flat, even, ultra-wide, ultra-bright LED light pattern for superior visibility while also helping to reduce eye fatigue. With high beams, operators can see further down the road and get a clear view of upcoming hazards.

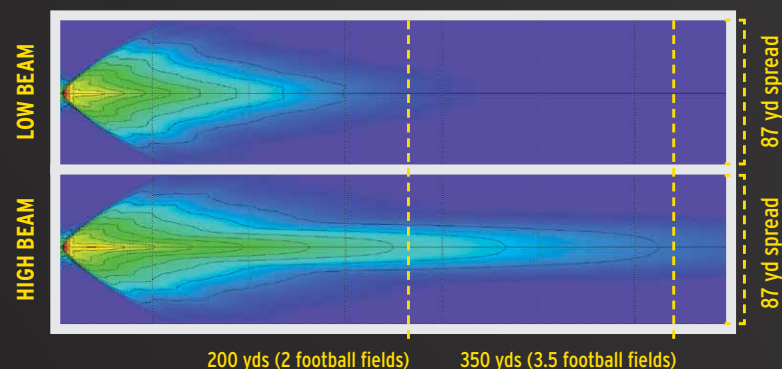

PLOW COMPATIBILITY

With our truck plows, you have a choice between LED or halogen headlights. And the **STORM SEEKER™** dual-halogen headlights rival any other halogen on the market. Providing a bright, smooth wide beam, our dual-halogen headlights are engineered and tested for maximum light output, performance and durability to keep you ahead of the storm.

It's easy to upgrade existing truck plows to STORM SEEKER LED headlights. All SnowEx® plows are FLEET FLEX system compatible. Check your vehicle's compatibility with our Power Match program at www.snowexproducts.com/powermatch

/// **STORM SEEKER™**

V-PLOW SERIES



YOUR MOST UNIVERSAL TOOL

The unmatched versatility of a V-plow makes it the ideal tool for pushing, windrowing, back dragging, or stacking snow. Easily transform between straight blade, V, and scoop modes with the touch of a button. Make your mark when you're prepared for whatever conditions await.



HDV™ V-PLOW



RDV™ V-PLOW



MULTIPLE BLADE MODES

Easily change between straight blade, V-plow, and scoop blade configurations to best tackle the snow removal task you are performing.



TRIP-EDGE PROTECTION

Each blade features independent trip-edge protection in all configurations—V, scoop, or straight—to keep snow in front of the blade. Compression-type springs never wear out or need to be adjusted.



DOUBLE-ACTING ANGLE CYLINDERS

Double-acting cylinders push and pull the wings forward and back under the heaviest snow loads. They also hold the wings firmly in place for optimum performance when back dragging.



SNOW CATCHER

For a clean pass in any blade configuration, V-plows have an integrated snow catcher over the center hinge to help keep snow from spilling over the top.

HDV™



RDV™



HEAVY-DUTY UTV



| FEATURES | |
|--------------------------|---|
| BLADE SIZES | 8'6", 9'6" |
| BLADE CONSTRUCTION | 16-gauge powder-coated steel and stainless steel |
| T-FRAME DESIGN | Provides added strength and allows blade-pitch adjustment to reduce uneven cutting edge wear. |
| CUTTING EDGE | A robust steel cutting edge protects the blade at the point of contact for longer wear and enhanced scraping action. |
| FLARED WINGS | Tall flared wings—up to 39" high at end on 9'6" model—throw snow higher and farther to deliver exceptional snow clearing results. |
| STRUCTURAL REINFORCEMENT | Six to eight solid welded reinforcement ribs for maximum durability—and robotically welded headgear—help ensure quality and consistency on every plow. |
| ACCESSORIES | Poly Cutting Edge, Carbide Cutting Edge, 1/2" and 5/8" Steel Cutting Edges, Back Drag Edge, Blade Angle Stop, Curb Guards, Rubber Deflector, Shoe Kits, Wing Extensions |
| UNIQUE FEATURES | Stand-Free Design, Adjustable Center Cutting Edge |
| VEHICLE COMPATIBILITY | Class 2-6 Trucks, Tractors |

| FEATURES | |
|--------------------------|---|
| BLADE SIZES | 7'6" |
| BLADE CONSTRUCTION | 14-gauge powder-coated steel and stainless steel |
| T-FRAME DESIGN | Provides added strength and allows blade-pitch adjustment to reduce uneven cutting edge wear. |
| CUTTING EDGE | The standard 3/8" x 6" steel cutting edge provides long-lasting performance and clean scraping action. |
| FLARED WINGS | Tall flared wings—33" high at end—throw snow higher and farther to deliver exceptional snow clearing results. |
| STRUCTURAL REINFORCEMENT | Six to eight solid welded reinforcement ribs for maximum durability—and robotically welded headgear—help ensure quality and consistency on every plow. |
| ACCESSORIES | 1" Poly Cutting Edge, 1/2" Steel Cutting Edge, Back Drag Edge, Blade Angle Stop, Cast Iron wor AR400 Steel Curb Guards, Shoe Kits, Poly Deflector, 10" Rubber Deflector |
| UNIQUE FEATURES | Adjustable Width Configuration |
| VEHICLE COMPATIBILITY | Half-Ton Trucks, Series 3 Tractors |

| FEATURES | |
|--------------------------|---|
| BLADE SIZES | 6' |
| BLADE CONSTRUCTION | 14-gauge high-strength, powder-coated steel |
| T-FRAME DESIGN | Provides added strength and allows blade-pitch adjustment to reduce uneven cutting edge wear. |
| CUTTING EDGE | The standard 1/4" x 5" steel cutting edge provides long-lasting performance and clean scraping action. |
| FLARED WINGS | Tall flared wings—29-1/4" high at end—throw snow higher and farther to deliver exceptional snow clearing results. |
| STRUCTURAL REINFORCEMENT | Six solid welded reinforcement ribs for maximum durability—and robotically welded headgear—help ensure quality and consistency on every plow. |
| ACCESSORIES | Rubber Snow Deflector, Poly Cutting Edge, Shoe Assembly Kit, Wing Extension Kit, Light Bar Kit, Blade Stop Kit |
| UNIQUE FEATURES | Stand-Free Design, Sub-Compact Tractor Mount Kit |
| VEHICLE COMPATIBILITY | Full-Sized UTVs, Sub-Compact Tractors |

WINGED PLOW SERIES



ENGINEERED FOR EFFICIENCY

SnowEx® winged plows allow you to adapt to the job and take on any challenge that comes your way. Available in either automatic or operator-controlled versions, our winged plows feature wing extensions that allow you to optimize the position of the plow to move more snow with every pass, giving you the power to take on more work and enhance your profits.



POWER PLOW™ WINGED BLADE



SPEEDWING™ WINGED BLADE



VERSATILE WINGS

Wings provide extensions on the left and right side of the plow to extend the width of the blade and reduce snow that falls off the end of the blade in windrow or scoop modes.



TRIP BLADE AND WING PROTECTION

Four heavy-duty coil springs protect your plow and vehicle by allowing the whole blade to trip when striking obstacles. Plus, the wings of the plow will trip in any position as well, including scoop.



CARBON STEEL CUTTING EDGE

Our winged plows come standard with a 6" high-carbon steel cutting edge on the moldboard and wings—ensuring a clean scrape on every pass while minimizing wear and extending the life of the blade.



HIGH-STRENGTH STEEL BASE CHANNEL

Be prepared for a difficult winter, this year and the next, with a high-strength steel base channel that provides extra support along the bottom of the plow blade.

POWER PLOW™

SPEEDWING™



| FEATURES | |
|--------------------------|--|
| BLADE SIZES | 8'-10', 8'6"-11' |
| BLADE CONSTRUCTION | Blade: 12-gauge powder-coated steel Wing: 11-gauge powder-coated steel |
| HYDRAULIC WINGS | Expand plow width by moving the wings outward (WIDE PASS™) or increase capacity by angling the wings forward (BUCKET BLADE™) to match plowing conditions. |
| CUTTING EDGE | The standard 1/2" x 6" steel cutting edge (1/4" x 10" on wings) provides long-lasting performance and clean scraping action. |
| PLOWING WIDTH | Straight: 96" - Compact 105" - BUCKET BLADE 120" - WIDE PASS Full Angle: 85.6" - Compact 93.4" - BUCKET BLADE 95.1" - Windrow 106.2" - WIDE PASS |
| STRUCTURAL REINFORCEMENT | Includes four welded vertical reinforcement ribs to provide unmatched torsional strength to prevent blade twisting. |
| ACCESSORIES | 1/2" and 5/8" Steel Cutting Edges (Blade), 1/4" and 3/8" Steel Cutting Edges (Wings), Poly Cutting Edges, Deflector Kits, Blade Guides |
| UNIQUE FEATURES | Full-Trip Moldboard |
| VEHICLE COMPATIBILITY | Class 2-5 Trucks |

| FEATURES | |
|---------------------------|---|
| BLADE SIZES | 8'7" |
| BLADE CONSTRUCTION | Blade: 12-gauge powder-coated steel Wing: 12-gauge powder-coated steel |
| AUTOMATIC ADJUSTING WINGS | Wings automatically adjust into scoop or windrow mode when you change the plowing angle with the control. |
| CUTTING EDGE | The standard 1/2" x 6" steel cutting edge (1/4" x 8" on wings) provides long-lasting performance and clean scraping action. |
| PLOWING WIDTH | Straight: Scoop: 103" Full Angle: Windrow: 93.4" |
| STRUCTURAL REINFORCEMENT | Includes four welded vertical reinforcement ribs to provide unmatched torsional strength to prevent blade twisting. |
| ACCESSORIES | Deflector Kits, Back Drag Edges, Blade Guides |
| UNIQUE FEATURES | Skid-Steer Compatible Mount, Full-Trip Moldboard |
| VEHICLE COMPATIBILITY | Class 2-5 Trucks, Skid-Steers |



VARIABLE STRAIGHT BLADE POSITIONS
(Compact/WIDE PASS™)
Use compact mode for transport and narrow areas, or expand the wings to make wider areas.



WINDROWING POSITION
When angled for windrowing, the leading wing directs more snow into the moldboard to eliminate spill-off.



BUCKET BLADE™ SCOOP POSITION
Angle the wings forward to engage scoop mode and carry up to 30% more snow with every pass.



CORNERING PERFORMANCE
Fully angle in the scoop position to maintain a full load of snow when moving around obstacles and corners.

STRAIGHT BLADE PLOW SERIES



SIMPLE. STRONG. RELIABLE.

Professional-grade plows that are designed with accessibility and simplicity in mind, our SnowEx® full line of straight blade plows enable people with all types of experience levels to efficiently move snow. With simple hydraulics that allow you to raise, lower, and angle your plow from inside the cab, you'll clear driveways and other tight areas in no time.




SCAPE MAXX™ DOWN-FORCE KIT

Standard on all truck plows, the Scape Maxx feature gives you the ability to apply downward force to bust through hard pack, improve back dragging, and maximize to-the-pavement scraping performance.



LIGHTWEIGHT, HIGH-STRENGTH STEEL

Constructed of durable, high-strength, low-alloy steel components that are both stronger and lighter than conventional steel.

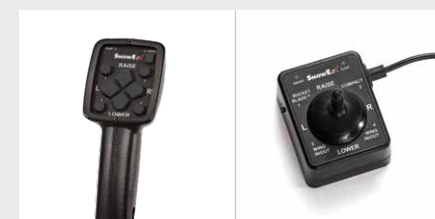

CONTROL OPTIONS

Choose between the POWER GRIP™ control with backlit buttons or the compact joystick control. Both feature power "on" and float LEDs. Applies to truck plows and HD UTV plow.



VERTICAL REINFORCEMENT RIBS

Vertical reinforcement ribs maximize blade strength and help prevent twisting even under the most punishing conditions.

HEAVY-DUTY



| FEATURES | |
|---|--|
| BLADE SIZES | 7'6", 8', 8'6", 9' |
| BLADE CONSTRUCTION | 12-gauge powder-coated steel |
| STRUCTURAL REINFORCEMENT | Two angled power ribs combined with six vertical reinforcement ribs maximize blade strength and help prevent twisting. |
| CUTTING EDGE | The standard 1/2" x 6" steel cutting edge provides long-lasting performance and clean scraping action. |
| HIGH-STRENGTH RECTANGULAR TUBE QUADRANT | The massive quad design contributes to torsional strength for enhanced plowing performance and equipment reliability season after season. |
| A-FRAME CONSTRUCTION | The tubular steel A-frame and large center pin provide added durability to withstand punishing conditions. |
| ACCESSORIES | Rubber Cutting Edges, Bolt-On Wing Extensions, Back Drag Edges, Deflector Kits, Blade Guides, Curb Guard Kits, Shoe Assembly Kits, Shock Absorbers |
| UNIQUE FEATURES | Scrape Maxx™ Down-Force Kit, Tractor Compatible Mount Kit, Full-Trip Moldboard |
| VEHICLE COMPATIBILITY | Class 2-5 Trucks & 3-4 Series Tractors |

REGULAR-DUTY



| FEATURES | |
|---|---|
| BLADE SIZES | 7'6", 8' |
| BLADE CONSTRUCTION | 16-gauge powder-coated steel |
| STRUCTURAL REINFORCEMENT | Six vertical ribs support the back of the blade to add strength and protect against twisting. |
| CUTTING EDGE | The standard 5/16" x 6" steel cutting edge provides long-lasting performance and clean scraping action. |
| HIGH-STRENGTH RECTANGULAR TUBE QUADRANT | Constructed of durable, high-strength, low-alloy steel components that are both stronger and lighter than conventional steel. |
| A-FRAME CONSTRUCTION | Provides strength and durability. |
| ACCESSORIES | 3/8" and 1/2" Steel Cutting Edges, Deflector Kits, Curb Guard Kits, Shoe Assembly Kits |
| UNIQUE FEATURES | Scrape Maxx Down-Force Kit, Full-Trip Moldboard |
| VEHICLE COMPATIBILITY | Half-Ton & Class 2 Trucks |

LIGHT TRUCK



| FEATURES | |
|---|---|
| BLADE SIZES | 6'8", 7'2" |
| BLADE CONSTRUCTION | 16-gauge powder-coated steel |
| STRUCTURAL REINFORCEMENT | Six vertical ribs support the back of the blade to add strength and protect against twisting. |
| CUTTING EDGE | The standard 1/4" x 5" steel cutting edge provides long-lasting performance and clean scraping action. |
| HIGH-STRENGTH RECTANGULAR TUBE QUADRANT | Constructed of durable, high-strength, low-alloy steel components that are both stronger and lighter than conventional steel. |
| A-FRAME CONSTRUCTION | Provides strength and durability. |
| ACCESSORIES | 1/4" Steel Cutting Edges, Deflector Kits, Shoe Assembly Kits, Blade Guides |
| UNIQUE FEATURES | Scrape Maxx Down-Force Kit, Full-Trip Moldboard |
| VEHICLE COMPATIBILITY | SUVs & Compact Trucks |

HEAVY-DUTY UTV



| FEATURES | |
|----------------------------------|---|
| BLADE SIZES | 6' |
| BLADE CONSTRUCTION | 14-gauge high-strength, powder-coated steel |
| STRUCTURAL REINFORCEMENT | Four vertical ribs support the back of the blade to add strength and protect against twisting. |
| CUTTING EDGE | The standard 1/4" x 5" steel cutting edge provides long-lasting performance and clean scraping action. |
| HIGH-STRENGTH STEEL CONSTRUCTION | Constructed of durable, high-strength, low-alloy steel components that are both stronger and lighter than conventional steel. |
| A-FRAME CONSTRUCTION | Provides strength and durability. |
| ACCESSORIES | Deflector Kits, Shoe Assembly Kits, Curb Guards Kit, Poly Cutting Edges Kit, Light Bar Kit |
| UNIQUE FEATURES | Sub-Compact Tractor Mount Kit, Full-Trip Moldboard |
| VEHICLE COMPATIBILITY | Full-Sized UTVs & Sub-Compact Tractors |

MID-DUTY UTV



| FEATURES | |
|----------------------------------|---|
| BLADE SIZES | 5'6", 6' |
| BLADE CONSTRUCTION | 16-gauge high-strength steel |
| STRUCTURAL REINFORCEMENT | Four vertical ribs support the back of the blade to add strength and protect against twisting. |
| CUTTING EDGE | The standard 1/4" x 4" steel cutting edge provides long-lasting performance and clean scraping action. |
| HIGH-STRENGTH STEEL CONSTRUCTION | Constructed of durable, high-strength, low-alloy steel components that are both stronger and lighter than conventional steel. |
| SWAY-FRAME™ DESIGN | Unique, patent-pending design allows the blade to shift side-to-side to align the blade with the wheel track. |
| ACCESSORIES | High-Wear Cutting Edge, Poly Cutting Edge, Deflector Kits, Shoe Assembly Kits |
| UNIQUE FEATURES | Full-Trip Moldboard, Hydraulic or Winch Lift Operation Options |
| VEHICLE COMPATIBILITY | Mid-Sized, Crossover & Sport UTVs |



ROTARY BROOM

WALK-BEHIND
SNOW REMOVAL



FEATURES & SPECIFICATIONS

BROOM HEAD

Floating pivotal broom head allows for easy adjustments to angle settings, brush rotation speed, and down pressure.

MULTIFUNCTION CONTROLS

Easily vary travel speed and direction with the unit's multifunction controls. The drive system features three forward gears and a reverse gear. Maneuvering is simple thanks to a seven-position height adjustment for handlebars, active assisted steering, and a freewheel feature for 360-degree turning.

PIVOTAL BROOM HEAD

A floating pivotal broom head has five angle settings to adjust the trajectory of snow and other materials.

PLOW AND ATTACHMENT MOUNTING

A standard 40-inch wide plow and other attachments fasten securely and easily to the unit's pin mounting system.

Additional Features: Anti-Corrosion Paint, Polar Trec Tires, Blade Attachment, Brush Cover



| | |
|--------------------|----------------|
| MODEL: | SS-4000 |
| Brush Width | 40" |
| Speed | Up to 2.7 mph |
| Weight | 238 lb |

ACCESSORIES



DEBRIS COLLECTOR BOX
Conveniently attaches to the broom for easy cleanup and waste disposal.



MULTI-PURPOSE BRUSH KIT
Achieve multi-season usage with a brush ideal for addressing spring/fall cleanup, construction sites, and walkways.



STANDARD DUTY BRUSH KIT
Replacement brush for sidewalks, entryways, and other winter applications.

See pages 22 & 23 for full list of accessories.

PUSHER SHOVELS

WALK-BEHIND
SNOW REMOVAL



FEATURES & SPECIFICATIONS

HEAVY-DUTY POLYETHYLENE BLADE

Constructed from ultra-high molecular weight polyethylene for superior strength, wear resistance, and snow turnover.

REINFORCED CONSTRUCTION (PUSHER)

A fiberglass pole is securely fastened to the blade with a reinforced triangular base and heavy-duty support bracket for added strength against heavy snow.

BI-DIRECTIONAL BLADE (WHEELED)

With the flip of the blade, the wheeled shovel features bi-directional blade movement for increased versatility on each pass. No tools required!

WHEELS (WHEELED)

6" wheels constructed of durable plastic and rubber allow for easier pushing and increased stability in winter conditions.

| | | | |
|---------------------------|--------------|--------------|-----------------|
| MODEL: | SP-30 | SP-36 | SP-36WL |
| Blade Dimensions | 30" x 9.25" | 36" x 9.25" | 36" x 10.5" |
| Overall Dimensions | 30" x 54" | 36" x 54" | 36" x 48" x 18" |
| Weight | 6 lb | 7 lb | 12 lb |

STORAGE CONTAINERS

ALL-WEATHER
STORAGE



FEATURES & SPECIFICATIONS

VERSATILE ALL-WEATHER APPLICATIONS

These poly containers are great for de-icing material because of their non-corrosive nature but can also be used for a variety of other storage applications like storing PPE and oil dry for shops and maintenance centers, or bulk item storage for manufacturing facilities.


Additional Features: Molded-in Handle, Fork Pockets, Lockable Lid

| | | | | |
|---------------------|--------------|--------------|--------------|--------------|
| MODEL: | 74045 | 74047 | 74049 | 74051 |
| Capacity | 3 cu ft | 6 cu ft | 12 cu ft | 18 cu ft |
| Empty Weight | 19 lb | 36 lb | 51 lb | 58 lb |

ACCESSORIES


ARCTIMAXX™ GREASE

Specially formulated to protect moving components in arctic mining conditions, this grease is ideal for bearings, hinges, and pivot bolts on snow and ice control equipment.




THICKER STEEL CUTTING EDGES

Select SnowEx® plows offer thicker center and wing cutting edges for enhanced wear resistance over time.




POLY CUTTING EDGES

Durable polyurethane cutting edges withstand abuse while scraping up snow and ice from the surface.




RUBBER CUTTING EDGES

Available on HD plow models only, rubber cutting edges are ideal for use on sensitive pavements, such as decorative pavers or parking structures, where steel may not be permitted.



BACK DRAG EDGES

Make quick work of clearing snow away from tight quarters, such as garage doors. Easy bolt-on installation and heavy-duty construction make this back drag edge a must for any serious snow fighter.



POWER GRIP™ HAND-HELD CONTROL

Intuitive hand-held control provides easy button control of all plow functions, and features backlit buttons, float LED, and automatic shutoff.



JOYSTICK CONTROL

Compact solenoid joystick control includes power on and float LEDs, and offers simple directional control of the plow.



SHOCK ABSORBERS

Helps soften blade return after it has been tripped forward, extending truck and plow life.



LIGHT BAR KIT

Dual-LED light kit bolts into existing holes on plow push bar. Not rated for road use.
Heavy-Duty UTV models only




TOUCH-UP PAINT

Provided in convenient 12-oz aerosol spray cans, touch-up paints deliver an excellent finish to help keep your plow looking its best.




BLADE GUIDES

Commercial blade guides are highly visible fluorescent orange, enhanced with reflective tape and available in 24" or 36" lengths.




DEFLECTOR KIT

A deflector enhances snow containment and prevents it from blowing onto the windshield.




SHOE ASSEMBLY KIT

For use on surfaces that are rocky and abrasive, such as gravel, the shoe kit lets you set the scraping height of the blade and enhances its ability to float over the plowing surface, rather than digging in.




CURB GUARD KIT

These simple bolt-on curb guards help to keep the blade from rubbing against curbs and protect it from damage if a curb is encountered.



BOLT-ON WING EXTENSIONS

Wing extensions maximize blade width and carrying capacity, reducing the number of passes to get the job done.



EMERGENCY PARTS BAG

Kit includes the most common replacement parts, packaged in a small, durable bag for easy storage behind or under truck seat. Available in two versions to cater to all plow models.



HYDRAULIC FLUID

For all truck plows, this zinc-free product can significantly enhance the operation and performance of the hydraulic system to temperatures as low as -40°F. Available in gallon and quart sizes.



GRILLE PLATE

Customizable 11-pin and 14-pin kits create harness storage locations for any application.



LED SECURITY KIT

Thwart opportunistic theft of LED plow lights with the Security Kit featuring tamper-resistant hardware, mounting bracket, and installation tool.



CONTROL CUP HOLDER MOUNT

Compact, easy-to-install accessory is designed to fit firmly into most size cup holders in your vehicle.



COMPATIBILITY MATRIX

| | HDV™ V-Plow | RDV™ V-Plow | POWER PLOW™ | SPEEDWING™ | Heavy-Duty |
|-----------------------------|-------------------|-----------------|-----------------|------------|-----------------------------------|
| | 8.6 HDV / 9.6 HDV | 7.6 SS / 7.6 PC | 8100PP / 8611PP | 8600SW | 7600HD / 8000HD / 8600HD / 9000HD |
| Thicker Steel Cutting Edges | X | X | X | X | |
| Poly Cutting Edges | | X | X | | |
| Rubber Cutting Edges | | | | | X |
| Back Drag Edges | X | X | | X | X |
| Blade Guides | X | X | X | X | X |
| Deflector Kit | X | X | X | X | X |
| Shoe Kit | X | X | | | X |
| Curb Guard Kit | X | X | | | X |
| Bolt-On Wing Extensions | X | | | | X |
| POWER GRIP™ Control | X | X | X | X | X |
| Joystick Control | X | X | X | X | X |
| Shock Absorbers | | | | | X |
| Light Bar Kit | | | | | |

| Regular-Duty | Light Truck | Heavy-Duty UTV | | Mid-Duty UTV | |
|-----------------|-----------------|----------------|---------------------|--------------|--------|
| 7600RD / 8000RD | 6800LT / 7200LT | 6000 V-Plow | 6000 Straight Blade | 6000 MD | 7200MD |
| X | | | | | |
| | | X | X | X | X |
| | | | | | |
| | | | | | |
| X | X | | | | |
| X | X | | | | |
| X | X | X | X | X | X |
| X | X | X | X | X | X |
| | | | | | |
| X | X | X | X | X | X |
| X | X | X | X | X | X |
| | | | | | |
| | | X | X | | |

SPECIFICATIONS



HDV™ V-Plow

| | 8.6 HDV | 9.6 HDV |
|----------------------------|---|---|
| Blade Width | 8'6" (259.1 cm) | 9'6" (289.6 cm) |
| Blade Height | 31" at hinge/38" at end (78.7 cm/96.5 cm) | 31" at hinge/39" at end (78.7 cm/99.1 cm) |
| Blade/Wing Thickness | 16 ga | 16 ga |
| Reinforcement Ribs | 6 vertical/1 angle | 8 vertical/1 angle |
| Trip Springs | 4 steel | 6 steel |
| Angle Cylinders | 1.75" x 11" (4.4 cm x 27.9 cm) | 1.75" x 11" (4.4 cm x 27.9 cm) |
| Plowing Width (Straight) | 102" Straight-112.5" w/Wings (259 cm-285.8 cm) 92" V-115" w/Wings (233.7 cm-292.1 cm) 86" Scoop-98" w/Wings (218.4 cm-249 cm) | 114" Straight-124.5" w/Wings (289.5 cm-316.2 cm) 103" V-126" w/Wings (261.6 cm-320 cm) 98" Scoop-110" w/Wings (249 cm-279.4 cm) |
| Plowing Width (Full angle) | 90" (228.6 cm) 115" w/Wings (292.1 cm) | 103.2" (262.1 cm) 118" w/Wings (299.7 cm) |
| Approx. Weight* | 950 lb (430 kg) | 1,020 lb (462 kg) |
| Cutting Edge | 3/8" (0.95 cm) | 1/2" x 6" (1.3 cm x 15.2 cm) |



RDV™ V-Plow

| | 7.6 SS | 7.6 PC |
|----------------------------|---|---|
| Blade Width | 7'6" (229 cm) | 7'6" (229 cm) |
| Blade Height | 27" at center/33" at end (68.58 cm/83.82 cm) | 27" at center/33" at end (68.58 cm/83.82 cm) |
| Blade/Wing Thickness | 14 ga | 14 ga |
| Reinforcement Ribs | 6 vertical/2 horizontal | 6 vertical |
| Trip Springs | 2 | 2 |
| Angle Cylinders | 1.5" x 12" (3.81 cm x 30.48 cm) | 1.5" x 12" (3.81 cm x 30.48 cm) |
| Plowing Width (Straight) | 90" Straight (228.6 cm) 77" V (195.6 cm) 81" Scoop (205.8 cm) | 90" Straight (228.6 cm) 77" V (195.6 cm) 81" Scoop (205.8 cm) |
| Plowing Width (Full angle) | 79" (200.6 cm) | 79" (200.6 cm) |
| Approx. Weight* | 539 lb (244 kg) | 493 lb (223.6 kg) |
| Cutting Edge | 3/8" x 6" (0.95 cm x 15.2 cm) | 3/8" x 6" (1.3 cm x 15.2 cm) |

*Does not include vehicle mount weight.



SPEEDWING™

| | 8600SW |
|----------------------------|------------------------------------|
| Blade Width | 8'7" (261.6 cm) |
| Blade Height | 29.5" (74.9 cm) |
| Blade/Wing Thickness | 12 ga |
| Reinforcement Ribs | 4 |
| Trip Springs | 4 steel |
| Angle Cylinders | 1.5" (3.8 cm) |
| Plowing Width (Straight) | 103" - Scoop (261.6 cm) |
| Plowing Width (Full angle) | 93.4" - Windrow (237.2 cm) |
| Approx. Weight* | 891.5 lb (404.4 kg) |
| Cutting Edge | 1/2" x 6" blade (1.3 cm x 15.2 cm) |
| | 1/2" x 8" wing (1.3 cm x 20.3 cm) |




POWER PLOW™

| | 8100PP | 8611PP |
|----------------------------|--|--|
| Blade Width | 8' (243.8 cm) | 8'6" (259.1 cm) |
| | 10' WIDE PASS™ (304.8 cm) | 11' WIDE PASS (335.3 cm) |
| Blade Height | 31" (78.7 cm) | 31" (78.7 cm) |
| Blade/Wing Thickness | 12 ga blade | 12 ga blade |
| | 11 ga wing | 11 ga wing |
| Reinforcement Ribs | 4 | 4 |
| Trip Springs | 4 steel | 4 steel |
| Angle Cylinders | 1.5" (3.8 cm) | 1.5" (3.8 cm) |
| Plowing Width (Straight) | 96" - Compact (243.8 cm) 105" - BUCKET BLADE™ (266.7 cm) 120" - WIDE PASS™ (304.8 cm) | 102" - Compact (259.1 cm) 118" - BUCKET BLADE (299.7 cm) 132" - WIDE PASS (335.3 cm) |
| Plowing Width (Full angle) | 85.6" - Compact (217.4 cm) 93.4" - BUCKET BLADE (237.2 cm) 95.1" - Windrow (241.6 cm) 106.2" - WIDE PASS (269.8 cm) | 94.5" - Compact (240 cm) 114.5" - BUCKET BLADE (290.8 cm) 113" - Windrow (287 cm) 126" - WIDE PASS (320 cm) |
| Approx. Weight* | 970 lb (439 kg) | 1,036 lb (469 kg) |
| Cutting Edge | 1/2" x 6" blade (1.3 cm x 15.2 cm) | 1/2" x 6" blade (1.3 cm x 15.2 cm) |
| | 1/4" x 10" wing (0.635 cm x 25.4 cm) | 1/4" x 10" wing (0.635 cm x 25.4 cm) |

*Does not include vehicle mount weight.





SPECIFICATIONS

|  Heavy-Duty | | | | |
|--|--|---|---|--|
| | 7600HD | 8000HD | 8600HD | 9000HD |
| Blade Width | 7'6" (228.6 cm) | 8' (243.8 cm) | 8'6" (259.1 cm) | 9' (274.3 cm) |
| Blade Height | 31" (78.7 cm) | 31" (78.7 cm) | 31" (78.7 cm) | 31" (78.7 cm) |
| Blade/Wing Thickness | 12 ga | 12 ga | 12 ga | 12 ga |
| Reinforcement Ribs | 6 vertical/2 angle | 6 vertical/2 angle | 6 vertical/2 angle | 6 vertical/2 angle |
| Trip Springs | 4 steel | 4 steel | 4 steel | 4 steel |
| Angle Cylinders | 1.5" (3.8 cm) | 1.5" (3.8 cm) | 1.5" (3.8 cm) | 1.5" (3.8 cm) |
| Plowing Width (Straight) | 90" (228.6 cm) 110.5" w/Wings (281 cm) | 96" (243.8 cm) 116.5" w/Wings (296 cm) | 102" (259.1 cm) 122.5" w/Wings (311 cm) | 108" (274.3 cm) 128.5" w/Wings (326 cm) |
| Plowing Width (Full angle) | 78.1" (198.4 cm) 95.2" w/Wings (241.8 cm) | 83.3" (211.6 cm) 100.4" w/Wings (255 cm) | 88.5" (224.8 cm) 105.6" w/Wings (268.2 cm) | 93" (236.2 cm) 112" w/Wings (284.5 cm) |
| Approx. Weight* | 730 lb (331 kg) | 746.5 lb (338 kg) | 763.5 lb (346 kg) | 781.5 lb (354 kg) |
| Cutting Edge | 1/2" x 6" (1.3 cm x 15.2 cm) | 1/2" x 6" (1.3 cm x 15.2 cm) | 1/2" x 6" (1.3 cm x 15.2 cm) | 1/2" x 6" (1.3 cm x 15.2 cm) |

|  Regular-Duty | | | | |
|---|--------------------------------|--------------------------------|-------------------------------|-------------------------------|
| | 7600RD | 8000RD | 6800LT | 7200LT |
| Blade Width | 7'6" (228.6 cm) | 8' (243.8 cm) | 6'8" (203.2 cm) | 7'2" (218.4 cm) |
| Blade Height | 27" (68.6 cm) | 27" (68.6 cm) | 23.5" (59.7 cm) | 23.5" (59.7 cm) |
| Blade/Wing Thickness | 16 ga | 16 ga | 16 ga | 16 ga |
| Reinforcement Ribs | 6 | 6 | 6 | 6 |
| Trip Springs | 2 steel | 2 steel | 2 steel | 2 steel |
| Angle Cylinders | 1.5" (3.8 cm) | 1.5" (3.8 cm) | 1" (2.5 cm) | 1" (2.5 cm) |
| Plowing Width (Straight) | 90" (228.6 cm) | 96" (243.8 cm) | 80" (203.2 cm) | 86" (218.4 cm) |
| Plowing Width (Full angle) | 81" (205.7 cm) | 86.6" (219.9 cm) | 71" (180.3 cm) | 76.3" (193.8 cm) |
| Approx. Weight* | 415 lb (188 kg) | 425 lb (193 kg) | 306 lb (139 kg) | 313 lb (142 kg) |
| Cutting Edge | 5/16" x 6" (0.79 cm x 15.2 cm) | 5/16" x 6" (0.79 cm x 15.2 cm) | 1/4" x 5" (0.63 cm x 12.7 cm) | 1/4" x 5" (0.63 cm x 12.7 cm) |

*Does not include vehicle mount weight.

|  Heavy-Duty UTV | | |
|---|--|--------------------------------|
| | 6000 V-Plow | 6000 Straight Blade |
| Blade Width | 6' (182.9 cm) | 6' (182.9 cm) |
| Blade Height | 25.75" at hinge/29.25" at end (65.4 cm/74.3 cm) | 23.5" (59.7 cm) |
| Blade/Wing Thickness | 14 ga | 14 ga |
| Reinforcement Ribs | 6 | 4 |
| Trip Springs | 2 steel | 2 steel |
| Angle Cylinders | 1" (2.5 cm) | 1" x 7" (2.5 cm x 17.8 cm) |
| Plowing Width (Straight) | 72" Straight-84" w/Wings (182.9 cm-213.4 cm) 60"/66" V-67"/73" w/Wings (152.4 cm/167.6 cm-170.2 cm/185.4 cm) 55"/61" Scoop-61"/67" w/Wings (139.7 cm/155 cm-155 cm/170.2 cm) | 72" (182.9 cm) |
| Plowing Width (Full angle) | 60"/66" (152.4 cm/167.6 cm) 67"/73" w/Wings (170.2 cm/185.4 cm) | 64" (162.6 cm) |
| Approx. Weight* | 355 lb (161 kg) | 261 lb (118 kg) |
| Cutting Edge | 1/4" x 5" (0.635 cm x 12.7 cm) | 1/4" x 5" (0.635 cm x 12.7 cm) |

|  Mid-Duty UTV | | |
|---|--|--|
| | 6000 MD | 7200 MD |
| Blade Width | 5'6" (168 cm) | 6' (183 cm) |
| Blade Height | 19.67" (50 cm) | 19.67" (50 cm) |
| Blade/Wing Thickness | 16 ga | 16 ga |
| Reinforcement Ribs | 4 | 4 |
| Trip Springs | 2 | 2 |
| Angle Cylinders | Hydraulic: 1.5" x 4" (3.8 cm x 10.2 cm) Winch: N/A | Hydraulic: 1.5" x 4" (3.8 cm x 10.2 cm) Winch: N/A |
| Plowing Width (Straight) | 59" (150 cm) | 64" (163 cm) |
| Plowing Width (Full angle) | - | - |
| Approx. Weight* | Hydraulic: 190 lb (86.2 kg) Winch: 175 lb (79.4 kg) | Hydraulic: 195 lb (88.5 kg) Winch: 180 lb (81.7 kg) |
| Cutting Edge | 1/4" x 4" (0.63 cm x 10.2 cm) | 1/4" x 4" (0.63 cm x 10.2 cm) |

*Does not include vehicle mount weight.





Rotary Broom

| | SS-4000 |
|------------------|---|
| Weight | 238 lb (108 kg) |
| Overall Length | 72" (182.9 cm) 80" w/Snow blade (203.2 cm) |
| Overall Height | 42.5" (108 cm) |
| Overall Width | 40" (101.6 cm) |
| Brush Width | 40" (101.6 cm) |
| Snow Blade Width | 40" wide (101.6 cm) 37" (94 cm) angled |
| Speed | Up to 2.7 mph (4.35 km/h) |
| Engine | HONDA® |



Pusher Shovels

| | SP-30 | SP-36 | SP-36WL (Wheeled) |
|---------------------------|------------------------------------|------------------------------------|---|
| Weight | 6 lb (3 kg) | 7 lb (3 kg) | 12 lb (5 kg) |
| Blade Dimensions | 30" x 9.25" (76.2 cm x 23.5 cm) | 36" x 9.25" (91.4 cm x 23.5 cm) | 36" x 10.5" (91.4 cm x 26.7 cm) |
| Overall Shovel Dimensions | 30" x 54" (76.2 cm x 137.2 cm) | 36" x 54" (91.4 cm x 137.2 cm) | 36" x 48" x 18" (91.4 cm x 121.9 cm x 45.7 cm) |

Storage Containers



| | 74045 | 74047 | 74049 | 74051 |
|-------------------|-------------------|-------------------|-------------------|-------------------|
| Material Capacity | 3 cu ft | 6 cu ft | 12 cu ft | 18 cu ft |
| Empty Weight | 19 lb (9 kg) | 36 lb (16 kg) | 51 lb (23 kg) | 58 lb (26 kg) |
| Overall Length | 33" (83.82 cm) | 48" (121.92 cm) | 48" (121.92 cm) | 48" (121.92 cm) |
| Overall Width | 22.75" (57.79 cm) | 33.25" (84.46 cm) | 33.25" (84.46 cm) | 33.25" (84.46 cm) |
| Overall Height | 17.4" (44.20 cm) | 20.75" (52.71 cm) | 27.75" (70.49 cm) | 35.75" (90.81 cm) |
| Fork Pockets | No | Yes | Yes | Yes |

Determine Which Plow
FITS YOUR VEHICLE.

Add your vehicle’s unique specifications to our Power Match plow selection tool to find out which SnowEx® snow plow will fit your vehicle. For future reference and comparison purposes, print out the information, or email it to your inbox. Visit snowexproducts.com/powermatch and find what you need to get working.





SPREADERS / PLOWS / LIQUIDS / SIDEWALKS



TrynEx International holds a national cooperative contract through Sourcewell, formerly NJPA, a government agency that offers cooperative purchasing and other services to more than 50,000 government entities and nonprofit organizations such as municipalities, counties, DOT and educational institutions. Sourcewell Members can save both time and money purchasing from competitively solicited contracts. The awarded contract for TrynEx International includes pricing for its snow and ice handling equipment, supplies and accessories.

Specifications subject to change without notice. Images may not reflect dealer inventory and/or unit specifications.

TrynEx International, LLC, reserves the right under its product improvement policy to change construction or design details and furnish equipment when

so altered without reference to illustrations or specifications used. TrynEx International, LLC, or the vehicle manufacturer may require or recommend optional equipment for snowplows. Do not exceed vehicle ratings with a snowplow. This product is manufactured under the following US patents: 7,134,227; 9,200,418; 9,822,563; 9,869,067; 10,793,056; 10,900,183; 11,332,899; 11,427,978; CAN Patents: 2,843,990; 2,911,623; and other patents pending. TrynEx International, LLC, offers a limited warranty for all snowplows and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: ARCTIMAXX™, Automatixx®, BUCKET BLADE™, EdgeView™, HDV™, POWER GRIP™, POWER PLOW™, RDV™, Scrape Maxx™, SECURITY GUARD™, SnowEx®, SPEEDWING™, STORM SEEKER™, Sway-Frame™, WIDE PASS™.