

H&S


RAKES & TEDDERS




Innovators in the Manufacture
of Agricultural and
Commercial Equipment

QUALITY - TESTED - PROVEN - DURABLE!

RR420 ROTARY RAKE



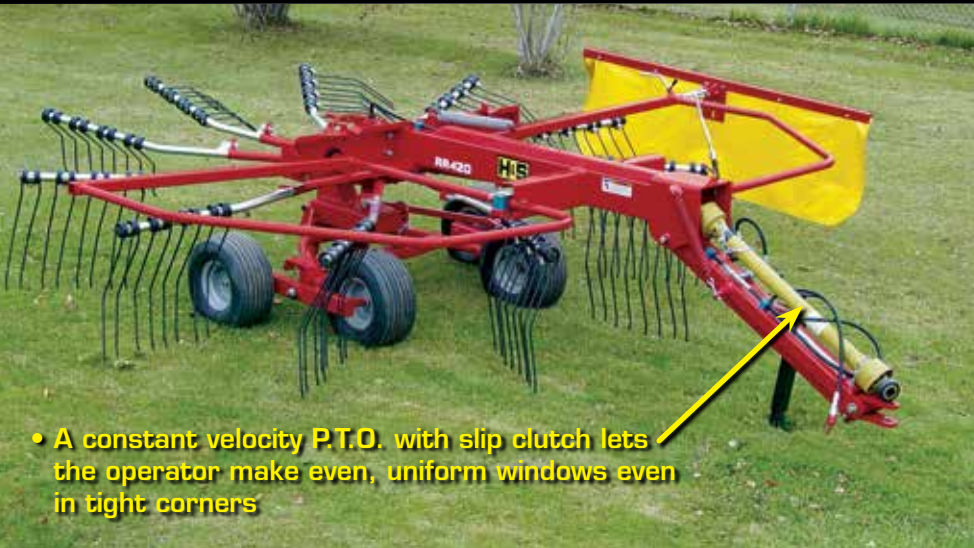


- A constant velocity P.T.O. with slip clutch lets the operator make even, uniform windows even in tight corners

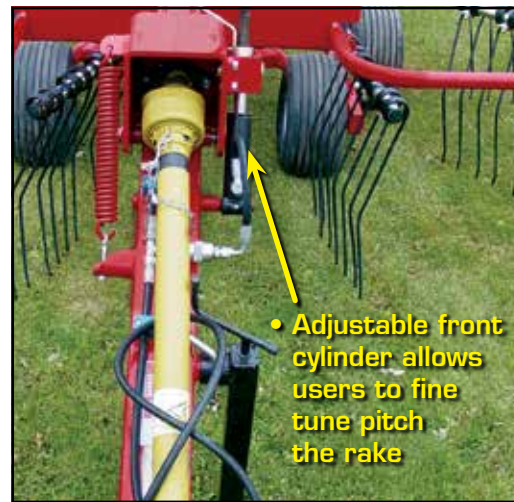


- Adjustable front cylinder allows users to fine tune pitch the rake

MODEL	RR420
NUMBER OF ARMS	11
NUMBER OF DOUBLE TINES PER ARM	4
WORKING WIDTH	13'8"
GEAR BOX	Sealed in oil bath
ROTOR DIAMETER (WORKING WIDTH)	11'2"
TRANSPORT WIDTH	5'9"
PTO DRIVELINE WITH SLIP CLUTCH	540 rpm Constant Velocity Overload Protects Gearbox
TIRES	4 Mounted On Tandem Axles 18X8.5x8
HP REQUIRED	30/45
WEIGHT	1369 lbs

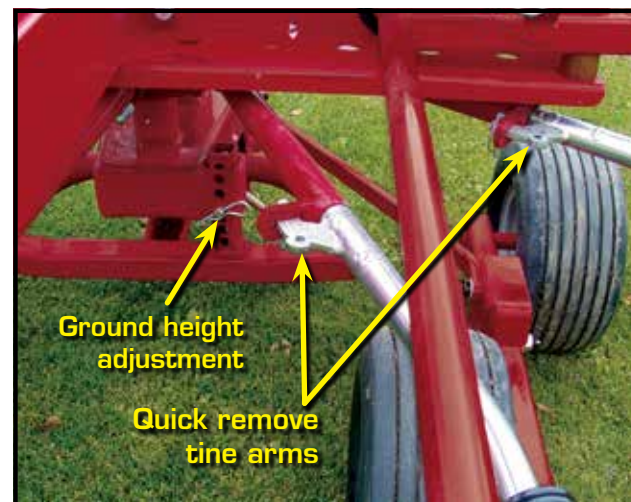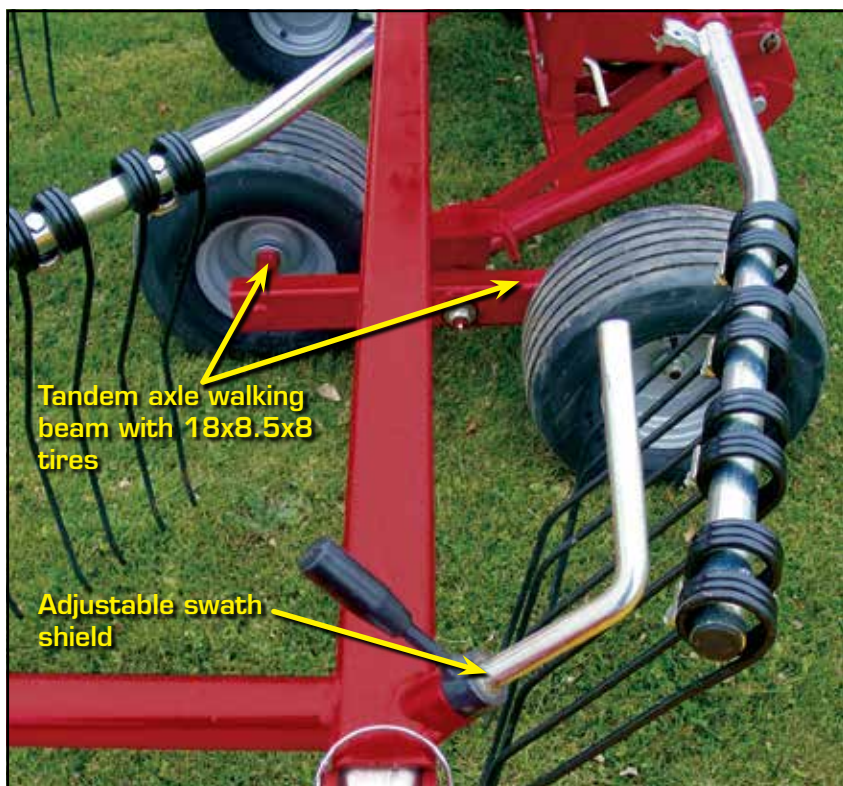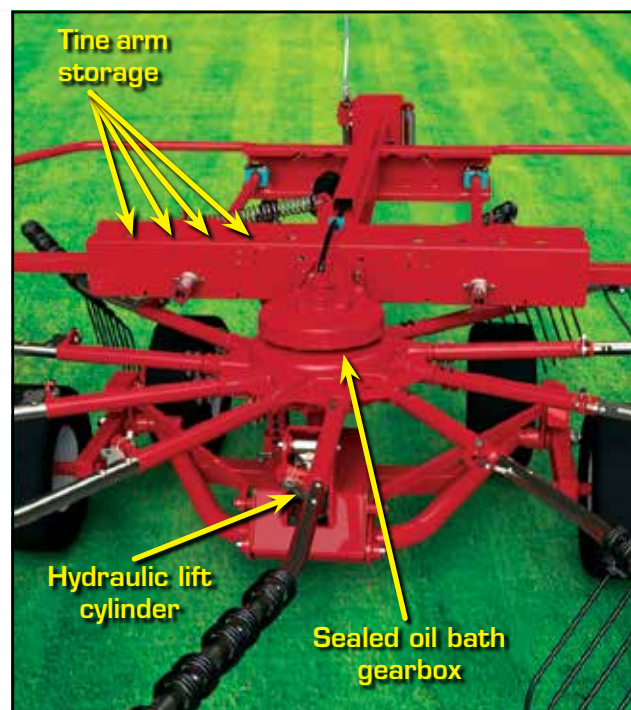

ROTARY TEDDERS

RT-5800

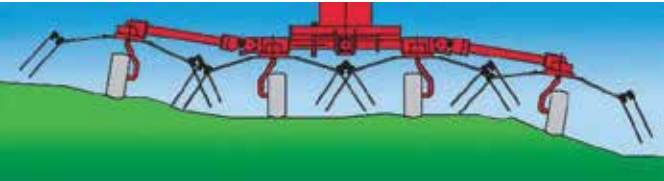

5200H/5800H FEATURES

- The **outer mounted rotars** automatically follow the unevenness of the ground.
- The rotars are driven by the **universal joint**. This system is a press-forged steel double universal joint.
- The outer rotars are hydraulic folded from a set of tractor remotes.



TRANSPORT POSITION

MODEL	RT-5800H	RT-5200H
NUMBER OF ROTARS	4	4
TINE ARMS ON ROTARS	6	6
WORKING WIDTH	19'	17'
TRANSPORT WIDTH	11"	10'3"
WEIGHT	1225#	1000#
TIRES	16x6.5-8	16x6.5-8
TRACTOR HP REQUIRED	25	25
PTO SLIP CLUTCH	Standard	Standard
OPERATING SPEED	10 mph	10 mph

RTG6



RTG6 TECHNICAL SPECIFICATIONS

- Central tandem wheels to adapt to any type of terrain
- Grease lubricated unit
- 540 rpm
- Heavy Duty shielded PTO shaft with clutch protection
- 16.650-8 Wheels
- 36 Flexible steel teeth
- Working Width = 24'
- Transport Width = 9'8"
- Weight = 1917 lbs.

RT-5200



RTG2



G2 TECHNICAL SPECIFICATIONS

- 5.600-6 Wheels
- 12 Flexible steel teeth
- Cardan shaft with slip clutch
- Oil bath gear box
- Working Width = 10'2"
- Transport Width = 8'2"
- Weight = 419 lbs.

TR RAKES


TR7/9



The TR7 has a flange for bolting on a 2-wheel extension to become a TR9 wheel rake for wider windrow widths. A jack is a standard equipment.



- **TR7, TR9, & TR9-3W Rakes** feature a spring loaded pin to select up to 4 pole adjustments. This along with the many possible wheel settings, gives a wide range of working widths
- All models feature independent rake wheel spring suspension. Rake wheels are lowered, and raised into transport position by the hydraulic cylinder that is operated from the tractor remote

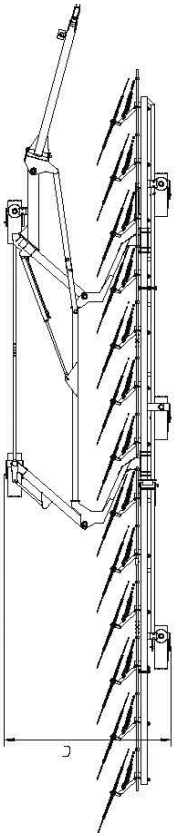

- Unlike the other TR model rakes, the **TR/9-S** has a narrow transport width of 77"
- The **TR/9-S** is equipped with a strong joint system that can move from transport position to the working position by the hydraulic cylinders that are operated by the tractor remote lever
- The hydraulic cylinder/joint system feature allows the operator to make width adjustments on the go, adapting to any changing field conditions

TR/9-S



MODEL	TR7	TR9	TR9-3W	TR9-S
NUMBER OF WHEELS	7	9	9	9
WHEEL DIAMETER	55"	55"	55"	55"
TINES PER WHEEL	40	40	40	40
RAKE WHEEL TINE DIAMETER	7MM	7MM	7MM	7MM



Warranty: See operators manual for warranty details and limitations. H&S reserves the right to change its products or the description at any time without notice or obligation.

Models and specifications are subject to change without prior notice.

4/19 3M



H&S MANUFACTURING

2608 S. Hume Avenue
Telephone (715) 387-3414
FAX (715) 384-5463 • Website www.hsmfgco.com
MARSHFIELD, WI 54449



H&S WAREHOUSE 10145 Lakeshore Road
P.O. Box 1260 • Telephone (716) 736-7595
FAX (716) 736-7596 • Website www.hsmfgco.com
RIPLEY, NY 14775