

H&S

TWIN-FLEX MERGER



Fast | Easy | Efficient


**NO ADDITIONAL
CROSS CONVEYOR
EXTENSION
NEEDED!**

Ability (with up to 16' windrow cuts) to merge 5 windrows into one in either direction.

28' OF CONTINUOUS MERGING WITH TWO 14' INDEPENDENT HEADS

THE H&S *SOFT-SHOE™* SUSPENSION SYSTEM

A self-contained, self-monitoring hydraulic suspension system for the TF6128 *TWIN-FLEX™* Merger provides the softest merger head footprint in the industry. The merger will handle all field conditions, including wet soils, rough terrain, new seeding, etc.

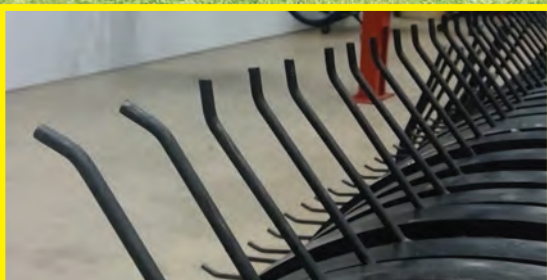

RUBBER-MOUNTED TEETH



6128 CONTROL BOX



5128 CONTROL BOX

**BEST-VALUE PER LINEAR FOOT
OF MACHINE WIDTH FOR A
2-HEAD CONTINUOUS MERGER**

**HEAVY-DUTY RADIAL TIRES
DON'T SCUFF IN FIELD (6128)**

NARROWEST TRANSPORT WIDTH AND LOWEST HEIGHT

CROSS CONVEYOR SYSTEM

The Highest Torque Rated hydraulic drive motors together with fluted rolls, and heavy 42" wide high capacity 2-ply cross conveyor belts make it the "Best System in the Industry!"

PATENTED CENTER CAM/CENTER DRIVE SYSTEM

Provides smooth clump-free windrows — **NO BUNCHING!** Merge left, right, or split direction on both models. The belts can also be stopped and started at any point while merging.

LARGE DIAMETER PICK-UP HEADS


All heads are approximately 31" in diameter with an 8" drop to the cross conveyor. The greater the distance of drop from the head to the cross conveyor allows for a better release of material, eliminates bunching of material, thus resulting in an even feed into the harvester for increased capacity.

SELF-CONTAINED HYDRAULIC SYSTEM

A 35-gallon reservoir coupled with large displacement motors for the pick-up Heads and Cross Conveyor is able to handle **HEAVY** Crops.

SIMPLE TO OPERATE REQUIRES NO SENSORS TO RUN THE MACHINE.

HYDRAULIC SKID SHOE KIT

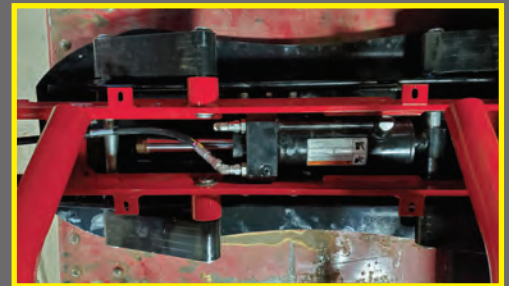

DUAL DRIVE CROSS CONVEYOR KIT



REMOTE FILTER PACKAGE



**OPTI
ONS**

SPECIFICATIONS

	TF5128	TF6128
Working Width	28' 2"	28' 2"
Transport Width	8' 6"	8' 6"
Transport Length	25'	25'
Transport Height	9' 8"	9' 8"
Pick-Up Heads	2-14"	2-14"
Head Travel	20" (10" up & 10" down)	20" (10" up & 10" down)
Pick-Up Strippers	Poly	Poly
Pick-Up Teeth	Rubber Mounted	Rubber Mounted
Conveyor Belt Width	42"	42"
Cross-Conveyor On/Off Right/Left/Split	In-Cab / Electric-Over-Hydraulic	In-Cab / Electric-Over-Hydraulic
Skid Shoe Height	Manual Adjust	Manual Adjust
Head Suspension	Manual Pressure Adjust	Exclusive SOFT-SHOE™ Suspension Technology System with in-cab adjust
Drive System	2-Section High Volume Pump	3-section High Volume Pump
PTO	1000 RPM / 1 $\frac{3}{8}$ " or 1 $\frac{3}{4}$ "	1000 RPM / 1 $\frac{3}{8}$ " or 1 $\frac{3}{4}$ "
Oil Reservoir Capacity	35 gallon	35 gallon
Tire Size	16.5 x 16.1	15R x 19.5 radial
Weight	12,100#	12,260#
Tractor Size	95 HP minimum	95 HP Minimum
Hydraulic Requirements	2 Sets of Remotes (Requires closed center hydraulic system) 2750 PSI 12 GPM min.	2 Sets of Remotes (Requires closed center hydraulic system) 2750 PSI 12 GPM min.
3-Point Hitch	Cat II, III, or III-N	Cat II, III, or III-N
Auto Default Right-Hand Merge	Standard	Standard

STRONG HERITAGE

STRONG PEOPLE

STRONGER FUTURE!

For over 50 years, H&S Manufacturing has made life better. Our team is committed to building long-lasting relationships and high-performance machinery. As we continue to grow and move forward, we want you to farm smarter with our most reliable and innovative farming equipment.

H&S is proud to be American made!



WARRANTY: See operator's manual for warranty details and limitations. H&S reserves the right to change its products or the description at any time without notice or obligation.

5/21 3M

H&S MANUFACTURING

www.hsmfgco.com

2608 S. HUME AVE. • MARSHFIELD, WI 54449
(715) 387-3414 • FAX (715) 384-5463



H&S WAREHOUSE • 10145 LAKESHORE ROAD
P.O. BOX 1260 • RIPLEY, NY 14775 • (716) 736-7595