


SINGLE-SPINDLE ROTARY CUTTERS

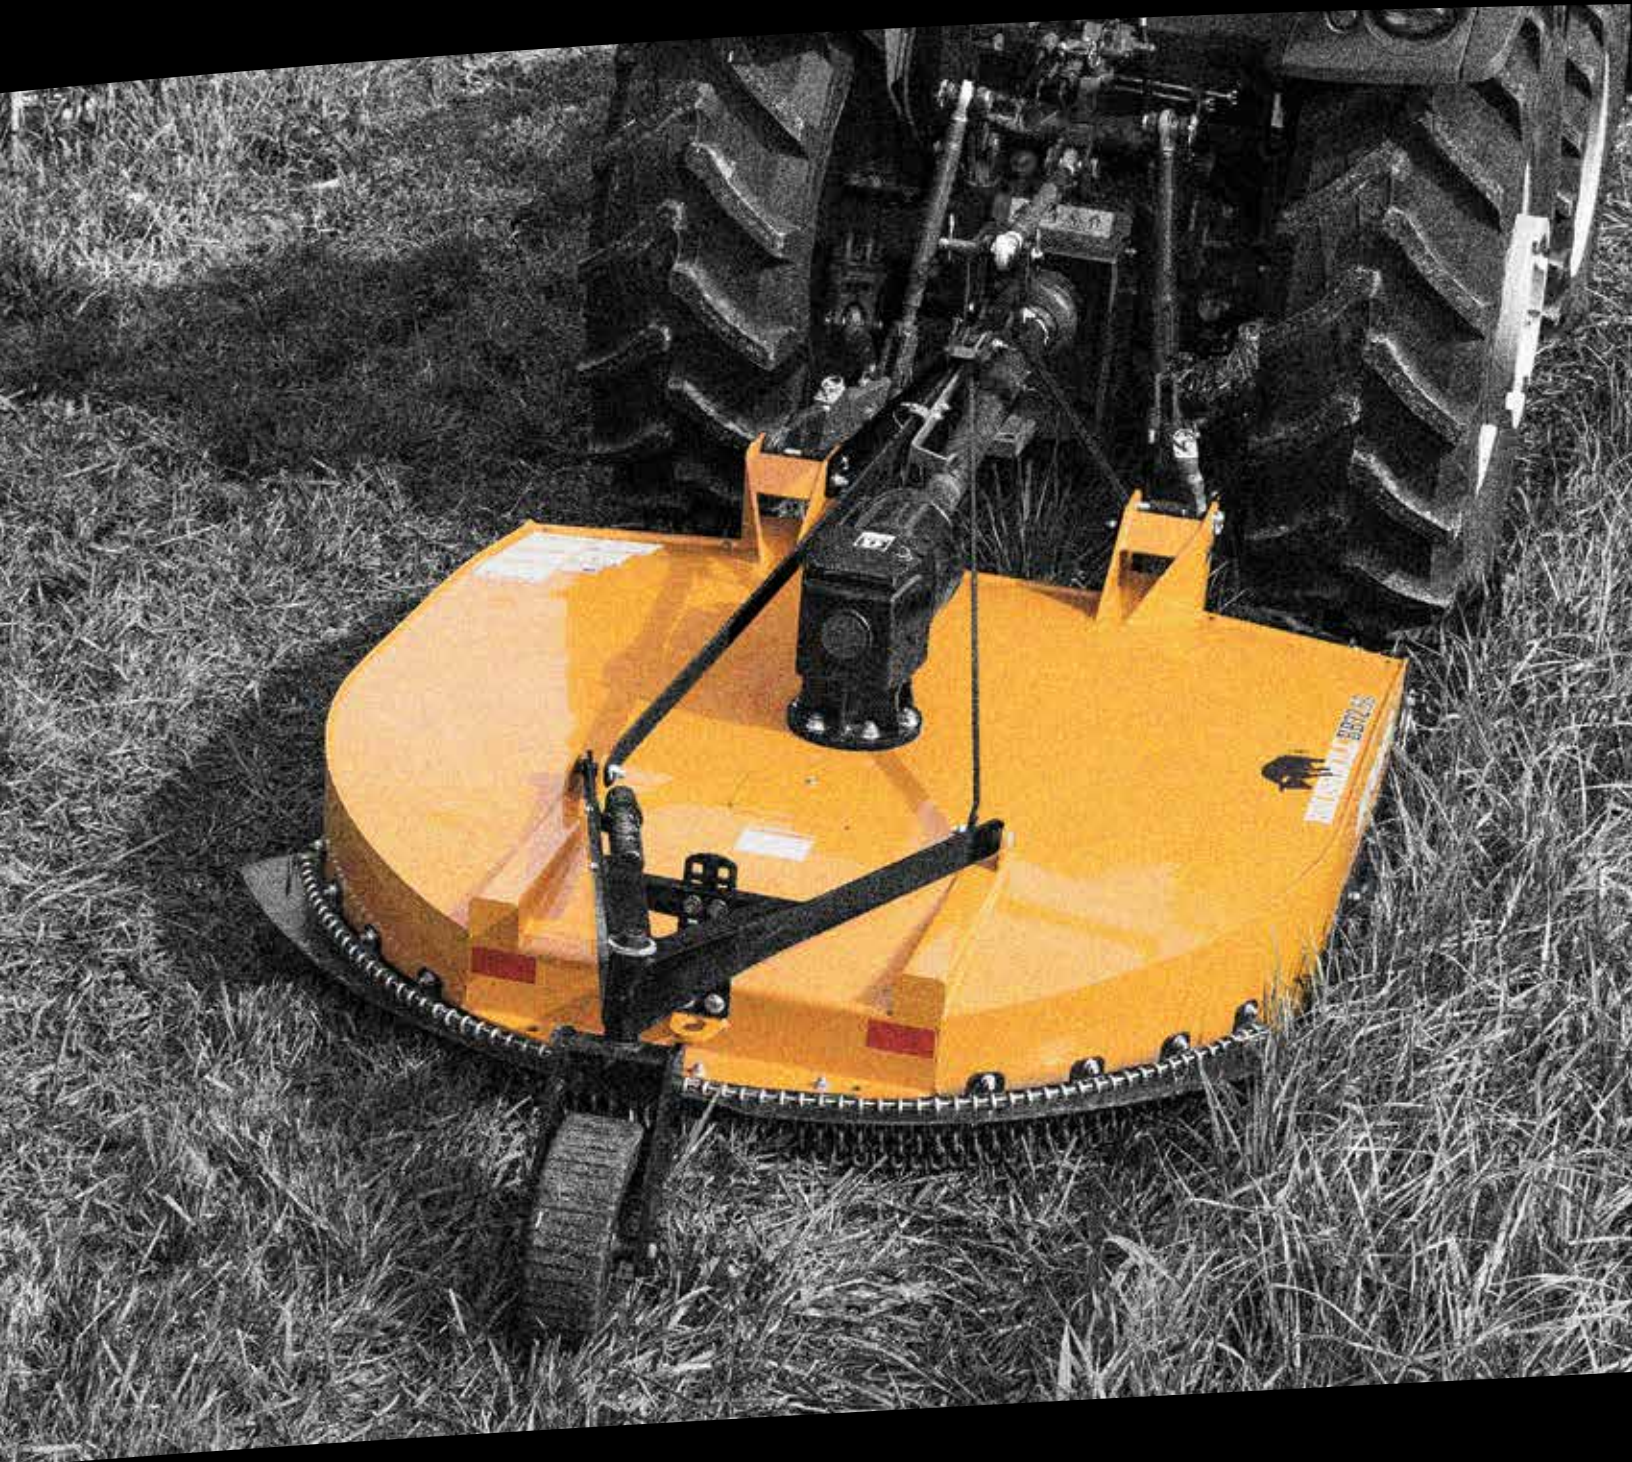

WOODS

SINGLE-SPINDLE ROTARY CUTTERS

TABLE OF CONTENTS

Single-spindle 30- and 40-series BrushBull™	4
BB48.30	
BB60.30	
BB72.30	
BB84.40	
Specifications Chart	5
Single-spindle 50-series BrushBull™	6
BB60.50	
BB72.50	
BB84.50	
Specifications Chart	7
Single-spindle 60-series BrushBull™	8
BB60.60	
BB72.60	
BB84.60	
Specifications Chart	9
RC-Series Rotary Cutters	10
RC48.20	
RC60.20	
RC72.20	
Specifications Chart	11

Woods

GENUINE PARTS

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.



SINGLE-SPINDLE ROTARY CUTTERS

Put our products to the test in your own back yard. Rugged, dependable and productive — Woods rotary cutters are designed for the extremes of real world use.

Start at the Beginning

Since 1946, Woods has grown to become the undisputed cutter expert. This legacy began with development of the first tractor-mounted rotary cutter and continues today with unmatched product innovations such as greasable Quick-change blade pins and a smooth, sloped deck that sheds debris.

And yet, we still go back to customers like you before redesigning a product. Erasing preconceptions, we listen – really listen – to what you need and value. Then, Woods Engineers go to work creating a product that you will love to use.

Finally, we make it just a bit more durable, kick up the performance and add style, because that's what people expect from Woods.

The top-selling Woods BrushBull™ is easy to use and maintain, delivers superior cut quality and performance, and looks good doing it. Year after year after year.



BRUSHBULL™ SINGLE-SPINDLE ROTARY CUTTERS

Our most popular models are ideal for clearing brush along fence rows, maintaining miles of interstate highways, and cutting overgrown grass, weeds and brush wherever you need to tame the land.

TRACTOR PTO HP RANGE: 15 - 75 HP

Models

BB48.30 | 48-inch
BB60.30 | 60-inch
BB72.30 | 72-inch

- Three-point hitch: CAT 1.
- Cuts brush up to two inches in diameter and nine inches tall.
- Six-year limited gearbox warranty includes the seals.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.

TRACTOR PTO HP RANGE: 35 - 90 HP

Models

BB84.40 | 84-inch

- Three-point hitch: CAT 1 & 2.
- Cuts brush up to two inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- Eleven-inch deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Choose an optional dual tailwheel or check chain, for adjusting the mowing height.



BB48.30
Shown with optional
chain shielding



BB84.40
Shown with optional
chain shielding

SPECIFICATIONS		BRUSHBULL™ SINGLE-SPINDLES			
MODEL	BB48.30	BB60.30	BB72.30	BB84.40	
Tractor PTO (hp)	15-50	25-50	30-75	35-90	
Hitch Category/Type	CAT 1 clevis			CAT 1 & 2 clevis	
Cutting Width (in)	48	60	72	84	
Total Weight with Chain Shield (lbs)	635	728	878	1,118	
Cutting Capacity Diameter (in)	2	2	2	2	
Cutting Height (in)	1 - 9			2 - 12	
Transport Width (in)	55	67.3	79.3	91.3	
Overall Length (in)	86	99	111	124	
Tractor PTO Speed (rpm)	540			540	
Quick-hitch Ready	Yes			Yes	
Rear Bumper	Z-channel			Z-channel	
Frame & Deck Support (in)	3 x 3 tube			3 x 3 tube	
Deck Construction	Smooth top, sloped			Smooth top, sloped	
Skid Shoes	Full-length, replaceable			Full-length, replaceable	
Deck Thickness (ga in)	12 .105		11 .120	11 .120	
Side Frame Thickness (ga in)	10 .135			10 .135	
Side Frame Depth (in)	10.5			11.6	
Gearbox Warranty	6-year limited			6-year limited	
Gearbox (hp)	65	65	75	90	
Output Shaft Diameter (in)	1.57			2	
Blade Tip Speed (fpm)	13,000	14,335	14,963	15,086	
Blade Dimensions (in)	.50 x 4			.50 x 4	
Blade Pin Diameter (in)	1.50			1.50	
Blade Carrier	Oval stump jumper			Oval stump jumper	
Driveline Protection	Slip-clutch			Slip-clutch	
Options	Check chain			Check chain, dual tailwheel	



SUPERIOR DESIGN

Customers like you told us what's important in a single-spindle cutter. Then, we redesigned our premium BrushBull cutter to meet – and exceed – your needs. An adjustable drive lift hanger and quick-hitch readiness make it easy to attach. A large access window on top of the deck and our exclusive, greasable Quick-change blade pins make blade changes easy, even in the field. But, you're not sacrificing performance for ease. A deep deck, large half-inch by four-inch blade and welded baffle work together, creating a strong suction that lifts, then evenly cuts and distributes large amounts of material.

SUPERIOR DURABILITY

Choose a BrushBull for the hours of testing in extreme conditions, and a Z-shaped, high-strength steel bumper that's twice as thick as competitive models, for added durability when backing over tough brush. Or, choose Woods for the advanced gearbox seal technology that's so good our 6-year limited warranty includes the seals. That's worry-free reliability.

SUPERIOR STYLE

Woods was the first to introduce a smooth, sloped deck that sheds debris. And, raising components off the deck makes clean-up easy. Front corners angle back to give operators more room between the tractor tire and cutter.

Adjustable driveline hanger makes it easier to attach, and is standard on all models.

Quick-hitch ready

Corners angle back to give operators more room between the tractor tire and cutter.

Full-length, bolt-on skid shoes protect the deck and are easy to change. Adjust the height on heavy-duty models.

Smooth, sloped deck sheds debris and is easy to clean.





New, advanced gearbox seal technology is designed for hard conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.

Greasable Quick-change blade pins are easy to maintain and remove.



A large blade access window makes it easy to reach our exclusive Quick-change pins and quickly change the blade from the top of the deck.



BB60.30
Shown with optional chain shielding

High-strength steel bumper is 2-times thicker than competitive models, with a Z-channel frame for added durability when backing over tough brush.

SUPERIOR DESIGN, DURABILITY AND STYLE UNDER THE DECK, TOO!



- Rear baffle, standard on all models, concentrates the airflow and ensures cut material is distributed evenly.
- The large 1/2-inch by 4-inch blades and extra deep deck precisely cut large amounts of material.
- A beefier, heavy-duty crossbar and 1/4-inch steel stump jumper protect the undercarriage from extreme conditions.
- The frame is built with full-length 3-inch by 3-inch tubes and channels for extra durability.



WOODS BRUSH BULL

TRACTOR PTO HP RANGE: 30 - 150 HP

Models

BB60.50 | 60-inch

BB72.50 | 72-inch

BB84.50 | 84-inch

- Three-point hitch: CAT 1 & 2, CAT 2 & 3.
- Cuts brush up to three inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck manufactured for tough conditions.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper, check chains for height adjustments, and dual tail wheel on the BB72.50 and BB84.50.

SPECIFICATIONS		BRUSHBULL™ SINGLE-SPINDLES		
MODEL	BB60.50	BB72.50	BB84.50	
Tractor PTO (hp)	30-150		40-150	
Hitch Category/Type	CAT 1 & 2 clevis		CAT 2 & 3 clevis	
Cutting Width (in)	60	72	84	
Total Weight with Chain Shield (lbs)	1,006	1,152	1,331	
Cutting Capacity Diameter (in)	3			
Cutting Height (in)	2 - 12			
Transport Width (in)	67.3	79.3	91.3	
Overall Length (in)	100	112	124	
Tractor PTO Speed (rpm)	540			
Quick-hitch Ready	Yes			
Rear Bumper	Z-channel			
Frame & Deck Support (in)	3 x 3 tube			
Deck Construction	Smooth top, sloped			
Skid Shoes	Full-length, replaceable			
Deck Thickness (ga in)	10 .135			
Side Frame Thickness (in)	0.25			
Side Frame Depth (in)	12.7			
Gearbox Warranty	6-year limited			
Gearbox (hp)	150			
Output Shaft Diameter (in)	2			
Blade Tip Speed (fpm)	15,525	15,900	16,000	
Blade Dimensions (in)	.50 x 4			
Blade Pin Diameter (in)	1.5			
Blade Carrier	Diamond stump jumper, optional round			
Driveline Protection	Slip-clutch			
Options	Check chains, round stump jumper		Check chains, round stump jumper, dual tailwheel	

Count on the integrity of the BrushBull frame

- Stress points are tied to full-length 3-inch by 3-inch tubes, not on the deck plate, for added stability.
- A full frame design means strength and durability are built into every BrushBull from the frame out.
- The rear bumper is a Z-shaped channel that's two-times thicker than competitive models, adding structural integrity when backing over brush.



BB72.50
BrushBull frame

TRACTOR PTO HP RANGE: 40 - 210 HP

Models

BB60.60 | 60-inch

BB72.60 | 72-inch

BB84.60 | 84-inch

- Three-point hitch: CAT 1 & 2, CAT 2 & 3.
- Cuts brush and saplings up to four inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck is made for extreme conditions.
- Deck is 12.7 inches deep, with half-inch by four-inch blades, and rear baffling that work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper, and check chains for height adjustments. Dual tailwheel is standard on the BB72.60 and BB84.60.



▶ VIDEO

SPECIFICATIONS	BRUSHBULL™ SINGLE-SPINDLES		
	MODEL	BB60.60	BB72.60
Tractor PTO (hp)	40-150	50-210	65-210
Hitch Category/Type	CAT 1 & 2 clevis		CAT 2 & 3 clevis
Cutting Width (in)	60	72	84
Total Weight with Chain Shield (lbs)	1,082	1,366	1,568
Cutting Capacity Diameter (in)	4		
Cutting Height (in)	2 - 12		
Transport Width (in)	67.3	79.3	91.3
Overall Length (in)	100	112	124
Tractor PTO Speed (rpm)	540		
Quick-hitch Ready	Yes		
Rear Bumper	Z-channel		
Frame & Deck Support (in)	3 x 3 tube		
Deck Construction	Smooth top, sloped		
Skid Shoes	Adjustable height full-length, replaceable		
Deck Thickness (ga in)	10 .135		
Side Frame Thickness (in)	0.25		
Side Frame Depth (in)	12.7		
Gearbox Warranty	6-year limited		
Gearbox (hp)	210		
Output Shaft Diameter (in)	3		
Blade Tip Speed (fpm)	13,570	13,945	14,250
Blade Dimensions (in)	.50 x 4		
Blade Pin Diameter (in)	1.5		
Blade Carrier	Diamond stump jumper, optional round		
Driveline Protection	Slip-clutch		
Options	Check chains, round stump jumper, and dual tailwheel	Check chains, round stump jumper	



BB72.60

Shown with standard chain shielding

RC-SERIES SINGLE-SPINDLE ROTARY CUTTERS

Woods' RC-Series Single-spindle is ideal for getting the most from your compact or subcompact tractor. Built with high-strength steel, Woods confidently stands behind this product with our three-year gearbox warranty.



RC72.20 shown with optional chain shielding

Designed for Value

An economical rotary cutter for maintaining grassy pastures, open fields and recreational trails.

- Three cutting widths to fit the size of your job and paint colors to match your tractor.
- Unique smooth, sloped decks are easy to clean and reduce build-up of water and debris.
- Stump jumpers are standard on all models for added driveline protection.
- High-strength steel and quality parts provide dependable service year-after-year.
- Three-year gearbox warranty is one of the best in the industry.

TRACTOR PTO HP RANGE: 15 - 50 HP

Models

RC48.20 | 48-inch

RC60.20 | 60-inch

RC72.20 | 72-inch

SPECIFICATIONS			
SINGLE-SPINDLE ROTARY CUTTERS			
MODEL	RC48.20	RC60.20	RC72.20
Tractor PTO (hp)	15-40	20-50	
Hitch Category / Type	CAT 1 cantilevered		
Cutting Width (in)	48	57	69
Cutting Height Range (in)	2 - 9		
Cutting Capacity (in)	1		
Gearbox Horsepower (hp)	50		
Blade Tip Speed (fpm)	13,100	13,620	14,340
Side Frame Depth (in)	7		
Approximate Weight (lbs)	410	494	575
Blade Dimensions (in)	.5 x 3		
Blade Carrier	Oval stump jumper		
Tail Wheel (in)	4 x 16 laminated		
Driveline Protection	Shear-bolt or slip-clutch		
Driveline Holder	Yes, on deck		
Tractor PTO Speed (rpm)	540		
Quick-hitch Ready	Yes		
Warranty (cutter/gearbox)	1 year / 3 years		
Options	Check chains, bolt-on skid shoes, chain shielding		

Woods RC-Series Rotary Cutters – durable, versatile, affordable



Strong, fabricated tail wheel assembly with solid, laminated tire



Breaklink allows cutter to float and follow terrain for better cut quality



Optional bolt-on replaceable skid shoes for longer wear



Optional chain shielding for added protection from thrown objects



Got ideas?

Join our Power Team customer panel at woodsequipment.com/contact/power-team, or scan the QR code to the right.

You have the power...



WOODS® | Woods Equipment Company
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

WOODS
GET AFTER IT

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2022 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

B07080 Revised June 2022