## 

2023 PRODUCT CATALOG

# WE PUT SO IIIII MUCHINTOOUR MOWERS. WHICH ISWHYYOUGET SO MUCH OUT III MINIOFTHEM.

**BLOOD, SWEAT & TEARS? SURE, THEY'RE** IN THERE. HEART & SOUL? MAXED OUT. PRIDE? YOU'D BETTER BELIEVE IT. THEN. OF COURSE, THERE'S ALL THE SUPERIOR ENGINEERING, INNOVATION, AND ONLY THE BEST PARTS FROM THE SMALLEST **BOLT TO OUR HEAVIEST-GAUGE STEEL. SO.** IF YOU'RE WONDERING WHY YOU SHOULD CHOOSE GRAVELY, OUR ONLY QUESTION IS HOW LONG OF A LIST WOULD YOU LIKE?





### **OUR FAMILY TREE** -


must have deep roots. How else could it support all these branches? The Gravely brand keeps growing and growing. That's what happens when you keep up with the demands of your customers. Commercial, residential, stand-ons, utility, electric, this is a prolific family of products with an unmatched pedigree.





#### **GRAVELY**







PRO-TURN® 300



PRO-TURN® MACH-ONE



PRO-STANCE® EV



PRO-STANCE®



Z-STANCE®



Axis™

Atlas JSV®

PRO-WALK®









**MODEL - 991144** 

15.5 HP Kawasaki® FX481V Engine

44"

**MODEL - 991145** 

19 HP Kawasaki® FX600V Engine

#### **SMALLER FOOTPRINT**

The Compact-Pro® easily passes through gates as narrow as 36 inches and nimbly maneuvers around common residential obstacles

**FUEL TANK DESIGN** Increases stability and improves machine handling and visibility.

KAWASAKI® FX ENGINE Powered by a Kawasaki® FX Engine that touts a heavy-duty canister air cleaner to optimize performance in all conditions and extend engine life.





MODEL - 991286

22 HP Kawasaki® FX691V Engine

**52**"

**MODEL - 991288** 

22 HP Kawasaki\* FX691V Engine

60"

**MODEL - 991290** 

23.5 HP Kawasaki® FX730V Engine

#### AN AUTOMOTIVE-STYLE TUBULAR

FRAME It's unique to the mowing industry and increases durability by withstanding force from any direction. This high-strength, premium frame is positioned with a lower center of gravity to improve stability while mowing on hillsides.

**ZT-3200® TRANSAXLES** They're more heavy duty and can handle higher speeds. They're also commercial grade andserviceable for a longer life span.

X-FACTOR® 3 DECK The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 7-gauge steel to deliver years of solid performance.

**SUSPENSION FORKS** Big impacts on rough terrain go virtually unnoticed by the operator. They also improve the overall ride and decrease driver fatigue.





**MODEL - 991128** 

22 HP Kawasaki® FX691V Engine

**52**"

**MODEL - 991129** 

22 HP Kawasaki® FX691V Engine

**MODEL - 991132** 

23 HP Kohler® ZT730 Engine

60"

**MODEL - 991130** 

23.5 HP Kawasaki® FX730V Engine

**MODEL - 991133** 

25 HP Kohler® EZT740 Engine

**CBT SYSTEM** Our Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.

**X-FACTOR® II DECK** Fabricated from top to bottom, this 7-gauge steel deck provides industrial-strength peace of mind.

**SEATING SYSTEM** All-day comfort comes from the high-back suspension seat with improved lateral stability and added vibration control, along with a 4-inch seat slide, lumbar support, and padded armrest.



THE GOLDILOCKS APPROACH:

LL BE JUST RIGHT.



THREE DIFFERENT MOWERS, EACH DESIGNED AND ENGINEERED FOR SPECIFIC WANTS AND NEEDS. These are the big boys who put the "heavy" in "heavy-duty" and reinvented how comfortable a commercial mower can operate.

Take your pick, any one of these machines will define your fleet and your entire crew will ride with pride.





**MODEL - 992520** 

22 HP Kawasaki® FX691V Engine

52"

**MODEL - 992521** 

22 HP Kawasaki® FX691V Engine

60"

**MODEL - 992522** 

23.5 HP Kawasaki® FX730V Engine

**MODEL - 992524** 

25 HP Kohler® ZT740V Engine

**MODEL - 992523** 

26 HP Kawasaki® FT730V-EFI Engine

**MODEL - 992526** 

31 HP Kawasaki® FX921V

72"

**MODEL - 992525** 

31 HP Kawasaki® FX921V Engine

**COMFORTABLE SEAT** High back seat has lumbar support and molded armrests. Its red double stitching gives a high-end look with black, dark grey, and red accents.

PARKER TRANSAXLES Parker HTJ transaxles deliver a stop speed of 11 mph and have 12cc pump. Filters are accessed from the rear for easy maintenance. It's one complete system, eliminating the need for additional parts





**MODEL - 992515** 

31 HP Kawasaki° FX921V Engine



#### HIGH-VOLUME OUTPUT (HVO) DECK

The depth of this deck increases from its trim side to its discharge chute. That means it can handle a higher volume of clippings without clogging up.



**TUNNEL CHAMBER** An advanced cutting chamber is formed by setting the blades back four inches from the front of the deck for less clumping and even grass dispersion.



**INTEGRATED SEAT ISOLATORS** Bumps and engine vibration are smoothed out thanks to vibration-absorbing dampers.





MODEL - 992513

25 HP Kohler® ZT740 Engine

**MODEL - 992510** 

27 HP Kawasaki® FX850V Engine, Air Ride

60"

**MODEL - 992514** 

25 HP Kohler® ZT740 Engine

**MODEL - 992516** 

29.5 HP Kawasaki° FX850V-EFI Engine

**MODEL - 992511** 

31 HP Kawasaki® FX921V Engine, Air Ride

72"

**MODEL - 992518** 

29.5 HP Kawasaki® FX850V-EFI Engine

**MODEL - 992512** 

31 HP Kawasaki® FX921V Engine, Air Ride

**COMFORTABLE SEAT** High back seat has lumbar support and padded armrests, and its isolated mounting absorbs more shock.

#### **FULLY WELDED TUBULAR FRAME**

Strong and rugged, its wide front rail distributes weight for superior balance and supports the deck lift for easy engagement.

**PARKER TRANSAXLES** They deliver a top speed of 15mph and have a 16cc pump. Access filters from the rear for easy maintenance.





**MODEL - 992500** 

27 HP Kawasaki® FX850V Engine

60"

**MODEL - 992501** 

35 HP Kawasaki® FX1000V Engine

**MODEL - 992503** 

38.5 HP Kawasaki® FX1000V-EFI Engine

72"

**MODEL - 992502** 

35 HP Kawasaki® FX1000V Engine

**MODEL - 992504** 

38.5 HP Kawasaki® FX1000V-EFI Engine



**OPERATOR POD SYSTEM** Separates the operator from the mower's bouncing and jostling. You'll feel like you're floating as you mow faster and more comfortably, without sacrificing control.

**DIAL-A-HEIGHT** This lets the operator easily adjust the deck height by quarter-inch increments.

**X-FACTOR® 3 DECK** The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 7-gauge steel to deliver years of solid performance.















Powered by the superior battery technology from Fusioncore<sup>™</sup>, the EV's four swappable batteries deliver all-day, reliable, high-performance power. It's exactly what you've come to expect from Gravely and what you need in a commercial mower. You'll forget pullies, belts, engine oil changes, and driving vibrations even exist.



## 48"

#### **SIDE DISCHARGE MODEL - 997005**

4-16 KwH FusionCore Swappable Batteries

#### **REAR DISCHARGE MODEL - 997008**

4-16 KwH FusionCore Swappable Batteries

**52**"

#### **SIDE DISCHARGE MODEL - 997006**

4-16 KwH FusionCore Swappable Batteries

#### **REAR DISCHARGE MODEL - 997009**

4-16 KwH FusionCore Swappable Batteries

60"

#### **SIDE DISCHARGE MODEL - 997007**

4-16 KwH FusionCore Swappable Batteries

#### **REAR DISCHARGE MODEL - 997010**

4-16 KwH FusionCore Swappable Batteries

#### FUSIONCORE QUICKSWAP BATTERIES

Batteries can be switched in seconds to ensure you and your crew can continue to cut all day and beyond.

#### X3 CONSTANT DRIVE SPINDLES Our

proprietary spindles have a blade slip feature that prevents damage in the event of an impact. They also have a bottom bearing for easy serviceability for routine maintenance which avoids the need to replace the entire spindle.

**NEXT-GEN WHEEL DRIVES** Transaxles are driven with a brushless electric-drive motor coupled with a dual-reduction planetary gearbox.











Don't just sit there, step up to the future of mowing and stand up for green, eco-friendly service. Its power comes from the FusionCore™ battery system that can keep your crew cutting all day and longer. No more stops to fill gas tanks, just swap fully-charged batteries in seconds and continue the job. You'll also save time on maintenance since there are no oil filters or oil to change



## 48"

#### **SIDE DISCHARGE MODEL - 998001**

4-16 KwH FusionCore Swappable Batteries

#### **REAR DISCHARGE MODEL - 998004**

4-16 KwH FusionCore Swappable Batteries

## **52**"

#### **SIDE DISCHARGE MODEL - 998002**

4-16 KwH FusionCore Swappable Batteries

#### **REAR DISCHARGE MODEL - 998005**

4-16 KwH FusionCore Swappable Batteries

## 60"

#### **SIDE DISCHARGE MODEL - 998003**

4-16 KwH FusionCore Swappable Batteries

#### **REAR DISCHARGE MODEL - 998006**

4-16 KwH FusionCore Swappable Batteries

#### **QUICK BATTERY SWAP SYSTEMS**

Gravely EV mowers include a quickswap battery system that allows you to run your mowers all day. No need to stop when the battery runs out. Just simply swap a new battery in and keep on mowing!

QUIET OPERATION Gas-powered lawn mowers are loud, especially in urban areas where the sound bounces off the structures. Electric mowers do not have the loud noises, or the vibrations mowers typically need to deal with when using gas. Lower noise pollution is a great.





**MODEL - 994157** 

18.5 HP Kawasaki® FS600V Engine

36"

**MODEL - 994149** 

18.5 HP Kawasaki® FS600V Engine

48"

**MODEL - 994161** 

23.5 HP Kawasaki® FX730V Engine

**52**"

**MODEL - 994162** 

23.5 HP Kawasaki® FX730V Engine

**MODEL - 994163** 

26 HP Kawasaki® FT730V-EFI Engine

60"

MODEL - 994164

23.5 HP Kawasaki® FX730V Engine

**MODEL - 994165** 

26 HP Kawasaki® FT730V-EFI Engine

**DECK HEIGHT ADJUSTMENT** The dual height-adjustment system was designed with both a traditional hand lever and a foot lever to lift and adjust the deck. It's perfect for smaller operators who may struggle with traditional hand lever lifts.





**MODEL - 994160** 

18.5 HP Kawasaki® FS600V Engine

48"

**MODEL - 994159** 

22 HP Kawasaki® FS651V Engine

52"

**MODEL - 994158** 

22 HP Kawasaki® FS651V Engine

ADJUSTABLE CRUISE BAR Allows the operator to limit and expand the unit's maximum speed in tight working environments.

THREE DECKS TO CHOOSE FROM 10 gauge 48" and 52" X-Factor III decks or 32" deck in 7 gauge for added weight.

**HEIGHT-OF-CUT SYSTEM** Simple lever control for fast adjustments

**LOWERED CENTER OF GRAVITY** 

Reshaped geometry and redistributed weight provide increased hillside stability and confidence in your ride.





**MODEL - 988184** 

14.5 HP Kawasaki° FS481V Engine

48"

**MODEL - 988185** 

18.5 HP Kawasaki\* FS600V Engine

52"

**MODEL - 988186** 

18.5 HP Kawasaki® FS600V Engine

60"

**MODEL - 988187** 

23 HP Kawasaki® FS691V Engine

#### SINGLE-POINT HEIGHT-OF-CUT

Provides optimal cutting performance in 1/4-inch increments.

**WIDE WHEELBASE** Delivers superior hillside stability.

#### **INTUITIVE STEERING CONTROLS**

Offers a shortened learning curve while providing precision handling.









**MODEL - 918007** 

23 HP Kohler® KT730 Engine

**MODEL - 918008** 

21.5 HP Kawasaki® FR651V Engine

48"

**MODEL - 918009** 

21.5 HP Kawasaki® FR651V Engine

52"

**MODEL - 918010** 

23 HP Kohler® KT730 Engine

**MODEL - 918011** 

23 HP Kawasaki® FR691V Engine

HYDRO-GEAR® SERVICEABLE EZT® TRANSAXLES Serviceable transaxles have optimized cooling to ensure smooth running for years to come. New service ports allow oil changes to help extend the life of your machine.

**NEW TALLER AND WIDER SEAT WITH MOLDED ARMRESTS** Ready for the long mow! This seat is 22" tall to provide more back support and is mounted on a taller seat base to make it easier to stand up and sit down. Molded armrests give your arms rest too.

#### **FULLY WELDED TUBULAR FRAME**

This fully welded tubular frame is a professional-grade backbone tough enough to get the job done in your backyard.





MODEL - 918012

21.5 HP Kawasaki® FR651V Engine

48"

**MODEL - 918013** 

23 HP Kawasaki® FR691V Engine

52"

**MODEL - 918015** 

23 HP Kawasaki® FR691V Engine

**MODEL - 918014** 

25 HP Kohler® KT740 Engine

60"

**MODEL - 918016** 

24 HP Kawasaki® FR730V Engine

**HYDRO-GEAR® ZT-2800® TRANSAXLES** 

Serviceable transaxles have optimized cooling to ensure smooth running for years to come. Integrated service ports on the internal reservoirs and a replaceable filter allow fluid changes for easy maintenance.

RIDE LIKE A PRO The 22" high back seat delivers more back support and has padded armrests. It's mounted on vibration-absorbing dampers. They smooth out bumps and engine vibration for a more comfortable ride.





**MODEL - 991266** 

21.5 HP Kawasaki® FR651V Engine

48"

**MODEL - 991268** 

23 HP Kawasaki® FR691V Engine

**MODEL - 991274** 

25 HP Kohler® KT740 Engine

**52**"

**MODEL - 991270** 

23 HP Kawasaki° FR691V Engine

**MODEL - 991276** 

25 HP Kohler® KT740 Engine

60"

**MODEL - 991272** 

24 HP Kawasaki® FR730V Engine

**MODEL - 991278** 


26 HP Kohler® KT745 Engine

#### **HYDRO-GEAR® ZT-3100® TRANSAXLES**

Reliable, commercial grade transaxles deliver the speed and torque to get your mowing done quickly. They're also easy to service for more longevity.

**COMFORTABLE RIDE** High back seat with padded armrests, mounted on vibration absorbing dampers smoothing out bumps and engine vibration making for a comfortable ride.



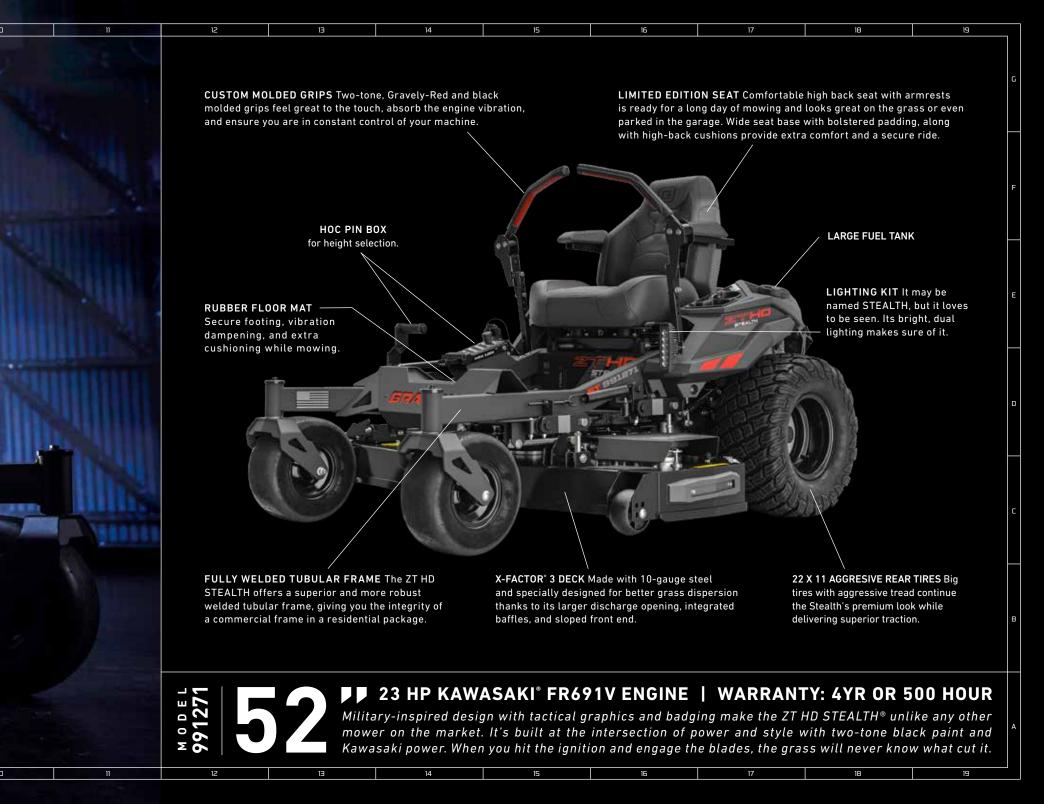





#### MAINTENANCE KITS

Gravely maintenance kits offer a complete service package, designed to protect your engine and promote optimal performance levels.



# **OEM OIL**

Gravely Oils are specifically formulated to provide protection for your engine in the toughest of environments.



### **OEM BELTS**

Designed to be a perfect fit for your machine, Gravely OEM belts provide the strength, longevity and quality needed to enhance performance and cut quality.

# **MULCH KIT**

Separate cutting chambers for each blade produce smaller clippings for a professionally manicured appearance.



# BAGGER SYSTEMS

Gravely's two- and three-bucket mesh bags provide superior airflow and venting.



These self-sharpening blades last up to 5 times longer than standard blades, helping to minimize downtime.



# **POWERED DECK LIFT**

Powered lift kits make cutting-height adjustments smooth and simple.



# **LIGHT KIT**

The LED headlight kit will light your way and keep you cutting long after others call it a day.



These airless, run-flat tires help to minimize your downtime and dampen the effect of uneven terrain.



## HITCH KIT

Add a hitch kit to enjoy unmatched versatility with a variety of tow-behind options.





# AMERICAN MADE IT STILL MEANS THE WORLD TO US

For over 100 years every Gravely that's come off our line has been built right here in the USA – and that's not changing any time soon. Because we believe in American ingenuity. We believe in the American work ethic. And just like the people who ride on a Gravely, we believe in doing the job right. That's not only the American way, that's the Gravely way.

COMPACT-PRO®	34	44			
MODEL NUMBER	991144	991145			
ENGINE	KAWASAKI® FX CC481V, HEAVY DUTY AIR CLEANER	KAWASAKI® FX600V			
HORSEPOWER	15.5 HP	19 HP			
DISPLACEMENT	603 CC	726 CC			
DRIVE SYSTEM	HYDRO-GE	AR* ZT-3100			
FUEL CAPACITY	7.2	GAL			
GROUND SPEED (Forward/Reverse)	7 MPH	/ 3 MPH			
DECK					
DECK MATERIAL	10 GA. STEEL WITH 10 GA.	SPINDLE REINFORCEMENT			
DECK CONSTRUCTION	FABR	ICATED			
NUMBER OF SPINDLES	2	3			
BLADE TIP SPEED (FPM)	18	,000			
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM				
SPINDLE BEARINGS	BALL BEARING				
DECK ENGAGEMENT	OGURA® GT1.5				
DECK LIFT SYSTEM	FOOT OPERATED				
CUTTING WIDTH	34 IN.	44 IN.			
CUTTING HEIGHT	1.0 IN.	- 5.0 IN.			
CUTTING POSITIONS		17			
WHEELS					
FRONT AXLE	FI	XED			
FRONT	13 X 5 - 6 SMO	OTH PNEUMATIC			
REAR	21 X 7-10 TURF	20.5 X 8-10 TURF			
FEATURES					
SEAT	HIGH BACK WI	TH SUSPENSION			
FOLDABLE ROPS	ОРТІ	IONAL			
MACHINE					
WEIGHT	737 LBS.	789 LBS.			
LENGTH	75 IN.	75 IN.			
WIDTH (w/o CHUTE)	35.9 IN.	46.7 IN.			
WIDTH (w/ CHUTE)	48.3 IN.	56.9 IN.			
HEIGHT	45.	3 IN.			
WARRANTY					
UNIT	4 YEAR / 750 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS - SEE YOUR	R PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS			
	And the second s				

MULCHING KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, FOLDING ROPS KIT, GRASS CATCHER KIT, LEAF COLLECTOR KIT, WHEEL COVER KIT, LASEREDGE BLADES

PRO-TURN® ZX	48	52	60				
MODEL NUMBER	991286	991288	991290				
ENGINE	KAWASAKI* FX691V	KAWASAKI° FX691V	KAWASAKI° FX730V				
HORSEPOWER	22 HP	22 HP	23.5 HP				
DISPLACEMENT		726 CC					
DRIVE SYSTEM		HYDRO-GEAR® ZT-3200					
FUEL CAPACITY		5.0 GAL					
GROUND SPEED (Forward/Reverse)		8.5 MPH / 4 MPH					
DECK	·						
DECK MATERIAL		10 GA. STEEL W/ 10 GA. SPINDLE REINFORCEMENT					
DECK CONSTRUCTION		FABRICATED X-FACTOR® 3					
NUMBER OF SPINDLES		3					
BLADE TIP SPEED (FPM)		18,000					
SPINDLE HOUSING MATERIAL		FORGED ALUMINUM					
SPINDLE BEARINGS	BALL BEARING						
DECK ENGAGEMENT	OGURA* GT1.5						
CUTTING WIDTH	48 IN.	52 IN.	60 IN.				
CUTTING HEIGHTS		1.5 IN 5.0 IN.					
CUTTING POSITIONS		15					
WHEELS							
FRONT AXLE		SUSPENSION, GREASABLE CASTER FORK TUBES					
FRONT		SM00TH 13 X 6.50-6					
REAR	TURF 22 X 10-12	TURF 22 X 10.5-12	TURF 22 X 12-12				
FEATURES							
SEAT		HIGH BACK COMFORT W/ SUSPENSION & PADDED ARMRESTS					
FOLDABLE ROPS		STANDARD					
MACHINE							
WEIGHT	925 LBS.	931 LBS.	952 LBS.				
LENGTH	79 IN.	79 IN.	79 IN.				
WIDTH (w/o CHUTE)	50.8 IN.	56.2 IN.	63.7 IN.				
WIDTH (w/ CHUTE)	61.9 IN.	67.3 IN.	74.8 IN.				
HEIGHT (w/ ROPS EXT/DOWN)		72 IN. / 52 IN.					
WARRANTY							
UNIT	4 YEAR / 750 HOUR LIN	MITED - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLET	E WARRANTY DETAILS				
ATTACHMENTS & ACCESSORIES							

MULCHING KIT, OCDB KIT, TRAILER HITCH KIT, LED HEADLIGHT KIT, AGGRESSIVE REAR TIRE KIT, STRIPING KIT, SUNSHADE KIT, POWERED BAGGER KIT, REAR TWEEL KIT, SUSPENSION SEAT KIT, SEMI-PNEUMATIC FRONT TIRE KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT

PRO-TURN® 100	148	152	152	160	160		
IODEL NUMBER	991128	991129	991132	991130	991133		
NGINE	KAWASAKI* FX691V	KAWASAKI° FX691V	KOHLER* ZT730	KAWASAKI* FX730V	KOHLER* ZT740		
DRSEPOWER	22 HP	22 HP	23 HP	23.5 HP	25 HP		
ISPLACEMENT	726 CC	726 CC	747 CC	726 CC	747 CC		
RIVE SYSTEM			HYDRO-GEAR® ZT-3400				
JEL CAPACITY			10 GAL				
ROUND SPEED (Forward/Reverse)			10 MPH / 5 MPH				
ECK							
ECK MATERIAL		7 G	A. STEEL W/ 1/4 IN. SPINDLE REINFORCEME	NT			
ECK CONSTRUCTION			FABRICATED				
UMBER OF SPINDLES			3				
ADE TIP SPEED (FPM)			18,000				
PINDLE HOUSING MATERIAL		FORGED ALUMINUM					
PINDLE BEARINGS	BALL BEARING						
ECK ENGAGEMENT		OGURA® GT 2.75					
JTTING WIDTH	48 IN.	52 IN.	52 IN.	60 IN.	60 IN.		
UTTING HEIGHTS			1.0 IN 5.0 IN.				
UTTING POSITIONS			17				
HEELS							
RONT AXLE			FIXED, GREASEABLE CASTER FORK TUBES				
RONT			SM00TH 13 X 6.50 - 6				
EAR			TURF 23 X 10.50 - 12				
EATURES							
EAT			SUSPENSION PLUSH SEAT WITH ARM RESTS				
OLDABLE ROPS			STANDARD				
ACHINE							
/EIGHT	1062 LBS.	1079 LBS.	1068 LBS.	1121 LBS.	1110 LBS.		
ENGTH	78.5 IN.	78.5 IN.	78.5 IN.	78.5 IN.	78.5 IN.		
IDTH (w/o CHUTE)	50 IN.	55.5 IN	55.5 IN	63 IN.	63 IN.		
/IDTH (w/ CHUTE)	62 IN.	67.5 IN.	67.5 IN.	75 IN.	75 IN.		
EIGHT (w/ ROPS EXT/DOWN)			68 IN. / 48 IN				
ARRANTY	· .						
NIT	5 YEAR / 1000	HOUR COMMERCIAL / NO HOUR LIMIT FIR	ST 2 YEARS - SEE YOUR PROFESSIONAL GR	AVELY® DEALER FOR COMPLETE WARR	ANTY DETAILS		
ECK SHELL & FRAME			LIMITED LIFETIME				

MULCHING KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, BAGGER KIT, SEMI-PNEUMATIC FRONT TIRE KIT, WHEEL COVER KIT, RADIAL DRIVE CONVERSION KIT, OCDB KIT, LASEREDGE BLADES, TUNE UP KIT

PRO-TURN® 300	348	352	360	360	360	360	372		
MODEL NUMBER	992520	992521	992522	992524	992523	992526	992525		
ENGINE	KAWASAKI FX691V	KAWASAKI FX691V	KAWASAKI FX730V	KOHLER ZT740	KAWASAKI FT730 EFI	KAWASAKI FX921V	KAWASAKI FX9		
HORSEPOWER	22 HP	22 HP	23.5 HP	25 HP	26 HP	31 HP	31 HP		
DISPLACEMENT	726 CC	726 CC	726 CC	747 CC	726 CC	999 CC	999 CC		
DRIVE SYSTEM				PARKER HTJ TRANSMISSION					
FUEL CAPACITY				12.5 GAL					
GROUND SPEED (Forward/Reverse)				11 MPH / 5 MPH					
DECK									
DECK MATERIAL			7 GA. STEI	EL WITH .25 IN. SPINDLE REINF	ORCEMENT				
DECK CONSTRUCTION				X-FACTOR® 3 DECK					
NUMBER OF SPINDLES				3					
BLADE TIP SPEED (FPM)				18,000					
SPINDLE HOUSING MATERIAL		FORGED ALUMINUM							
SPINDLE BEARINGS		BALL BEARING							
DECK ENGAGEMENT		OGURA GT2.75 OGURA GT3.5							
CUTTING WIDTH	48 IN.	52 IN.	60 IN.	60 IN.	60 IN.	60 IN.	72 IN.		
CUTTING HEIGHTS		1.0 IN 5.5 IN.							
CUTTING POSITIONS		19							
VHEELS									
FRONT AXLE			FIXED	), GREASEABLE CASTER FORK	TUBES				
FRONT				SMOOTH 15 X 6-6 PNEUMATIC					
REAR				24 X 12-16 BIAS PLY TURF					
FEATURES									
SEAT			SUSPE	ENSION PLUSH SEAT WITH ARM	RESTS				
OLDABLE ROPS				STANDARD					
MACHINE									
WEIGHT	1235 LBS.	1320 LBS.	1347 LBS.	1333 LBS.	1347 LBS.	1350 LBS.	1472 LBS.		
ENGTH	84 IN.	84 IN.	84 IN.	84 IN.	84 IN.	84 IN.	86.2 IN.		
WIDTH (w/o CHUTE)	51 IN.	55 IN.	63 IN.	63 IN.	63 IN.	63 IN.	75 IN.		
WIDTH (w/ CHUTE)	63 IN.	67 IN.	75 IN.	75 IN.	75 IN.	75 IN.	87 IN.		
IEIGHT (w/ ROPS EXT/DOWN)				76.0 IN. /47.8 IN.					
WARRANTY									
JNIT		5 YEAR/1250 HOUR COMME	RCIAL/NO HOUR LIMIT FIRST 2	YEARS- SEE YOUR PROFESSIO	NAL GRAVELY DEALER FOR CO	MPLETE WARRANTY DETAILS			
DECK SHELL & FRAME				LIMITED LIFETIME					

MULCHING KIT, ELECTRIC DECK LIFT KIT, TRAILER KIT KIT, LED HEADLIGHT KIT, POWERED BAGGER KIT, OCDC KIT, SUNSHADE KIT, REAR TWEEL KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, LASEREDGE BLADE KIT, TUNE UP KIT

PRO-TURN® MACH ONE	60
MODEL NUMBER	992515
ENGINE	KAWASAKI® FX921V
HORSEPOWER	31 HP
DISPLACEMENT	999 CC
DRIVE SYSTEM	PARKER HTG TRANSMISSION
FUEL CAPACITY	12.5 GAL
GROUND SPEED (Forward/Reverse)	15 MPH/6 MPH
DECK	
DECK MATERIAL	7 GA. STEEL W/ .25 IN. SPINDLE REINFORCEMENT
DECK CONSTRUCTION	HIGH-VOLUME OUTPUT DECK
NUMBER OF SPINDLES	3
BLADE TIP SPEED (FPM)	18,000
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM
SPINDLE BEARINGS	BALL BEARING
DECK ENGAGEMENT	OGURA® GT3.5 ELECTRIC CLUTCH
CUTTING WIDTH	60 IN.
CUTTING HEIGHTS	1.5 IN 5.5 IN.
CUTTING POSITIONS	19
WHEELS	
FRONT AXLE	FIXED, GREASEABLE CASTER FORK TUBES
FRONT	SMOOTH 15 X 6-6 SEMI PNEUMATIC
REAR	26 X 12-16 RADIAL TURF
FEATURES	
SEAT	HIGH BACK COMFORT W/ FULL SUSPENSION AND PADDED ARMRESTS
FOLDABLE ROPS	STANDARD
MACHINE	
NEIGHT	1486 LBS.
ENGTH	86.2 IN.
WIDTH (W/ CHUTE UP/DOWN)	61 IN. / 74.6 IN.
HEIGHT (W/ ROPS EXT/DOWN)	75 IN. / 47.75 IN.
WARRANTY	
JNIT	5 YEAR / 1500 HOUR COMMERCIAL / NO HOUR LIMIT FIRST TWO YEARS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS
ATTACHMENTS & ACCESSORIES	

MULCHING KIT, ELECTRIC DECK LIFT KIT, TRAILER KIT KIT, LED HEADLIGHT KIT, POWERED BAGGER KIT, OCDC KIT, SUNSHADE KIT, REAR TWEEL KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, LASEREDGE BLADE KIT, TUNE UP KIT

PRO-TURN® 500	552	552	560	560	560	572	572	
10DEL NUMBER	992510	992513	992511	992514	992516	992518	992512	
ENGINE	KAWSAKI FX850V	KOHLER ZT740	KAWASAKI FX921V	KOHLER ZT740	KAWASAKI 850V EFI	KAWASAKI 850V EFI	KAWASAKI FX92	
HORSEPOWER	27 HP	25 HP	31 HP	25 HP	29.5 HP	29.5 HP	31 HP	
DISPLACEMENT	852 CC	747 CC	999 CC	747 CC	852 CC	852 CC	999 CC	
DRIVE SYSTEM				PARKER HTG TRANSMISSION				
FUEL CAPACITY				12.5 GAL				
GROUND SPEED (Forward/Reverse)				15 MPH / 6 MPH				
DECK	·							
DECK MATERIAL			7 GA. STER	EL WITH .25 IN. SPINDLE REINF	ORCEMENT			
DECK CONSTRUCTION				X-FACTOR® 3 DECK				
NUMBER OF SPINDLES				3				
BLADE TIP SPEED (FPM)				18,000				
SPINDLE HOUSING MATERIAL		FORGED ALUMINUM						
SPINDLE BEARINGS		BALL BEARING						
DECK ENGAGEMENT		OGURA® GT3.5						
CUTTING WIDTH	52 IN.	52 IN.	60 IN.	60 IN.	60 IN.	72 IN.	72 IN.	
CUTTING HEIGHTS		1.0 IN 5.5 IN.						
CUTTING POSITIONS				19				
VHEELS								
FRONT AXLE			FIXED	), GREASEABLE CASTER FORK	TUBES			
FRONT			SI	MOOTH 15 X 6-6 SEMI PNEUMA	TIC			
REAR				26 X 12-16 RADIAL TURF				
FEATURES	·							
PLUSH SEAT WITH ARM RESTS	AIR RIDE	ISOLATED SUSPENSION	AIR RIDE	ISOLATED SUSPENSION	ISOLATED SUSPENSION	ISOLATED SUSPENSION	AIR RIDE	
OLDABLE ROPS				STANDARD				
MACHINE								
WEIGHT	1447 LBS.	1423 LBS.	1487 LBS.	1463 LBS.	1477 LBS.	1580 LBS.	1580 LBS.	
LENGTH	84 IN.	84 IN.	84 IN.	84 IN.	86.2 IN.	86.2 IN.	86.2 IN.	
WIDTH (w/o CHUTE)	51 IN.	51 IN.	63 IN.	63 IN.	63 IN.	75 IN.	75 IN.	
VIDTH (w/ CHUTE)	63 IN.	63 IN.	75 IN.	75 IN.	75 IN.	87 IN.	87 IN.	
IEIGHT (w/ ROPS EXT/DOWN)				76.0 IN./47.8 IN.				
VARRANTY	·							
UNIT		5 YEAR/1500 HOUR COMME	RCIAL/NO HOUR LIMIT FIRST 2	YEARS- SEE YOUR PROFESSIO	NAL GRAVELY DEALER FOR CO	MPLETE WARRANTY DETAILS		
DECK SHELL & FRAME				LIMITED LIFETIME				

MULCHING KIT, ELECTRIC DECK LIFT KIT, TRAILER KIT KIT, LED HEADLIGHT KIT, POWERED BAGGER KIT, OCDC KIT, SUNSHADE KIT, REAR TWEEL KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, LASEREDGE BLADE KIT, TUNE UP KIT

PRO-TURN® 600	652	660	660	672	672			
MODEL NUMBER	992500	992501	992503	992502	992504			
ENGINE	KAWASAKI* FX850V	KAWASAKI° FX1000	KAWASAKI° FX1000V-EFI	KAWASAKI° FX1000	KAWASAKI° FX1000V-EFI			
HORSEPOWER	27 HP	35 HP	38.5 HP	35 HP	38.5 HP			
DISPLACEMENT	852 CC	999 CC	999 CC	999 CC	999 CC			
DRIVE SYSTEM			PARKER HTG TRANSMISSION					
FUEL CAPACITY			12.5 GAL					
GROUND SPEED (Forward/Reverse)			15 MPH / 6 MPH					
DECK	<u> </u>							
DECK MATERIAL		7 GA	A. STEEL WITH .25 IN. SPINDLE REINFORCEM	MENT				
DECK CONSTRUCTION			FABRICATED X-FACTOR III					
NUMBER OF SPINDLES			3					
BLADE TIP SPEED (FPM)		18,000						
SPINDLE HOUSING MATERIAL		FORGED ALUMINUM						
SPINDLE BEARINGS		BALL BEARING						
DECK ENGAGEMENT		OGURA® GT3.5						
CUTTING WIDTH	52 IN.	60 IN.	60 IN.	72 IN.	72 IN.			
CUTTING HEIGHTS		1.0 IN 5.5 IN.						
CUTTING POSITIONS			19					
WHEELS								
FRONT AXLE			FIXED, GREASEABLE CASTER FORK TUBES					
FRONT			SMOOTH 15 X 6-6 SEMI PNEUMATIC					
REAR			26 X 12-16 LOW PROFILE RADIAL TURF					
FEATURES								
SEAT		HIGH BACK BOI	LSTERED SEAT WITH OPERATOR POD SUSPE	ENSION SYSTEM				
FOLDABLE ROPS			STANDARD					
MACHINE								
WEIGHT	1535 LBS.	1586 LBS.	1601 LBS.	1646 LBS.	1661 LBS.			
LENGTH	83 IN.	83 IN.	83 IN.	83 IN.	83 IN.			
WIDTH (w/o CHUTE)	55 IN.	63 IN.	63 IN.	75 IN.	75 IN.			
WIDTH (w/ CHUTE)	63 IN.	75 IN.	75 IN.	87 IN.	87 IN.			
HEIGHT (w/ ROPS EXT/DOWN)			71.5 IN / 47.8 IN					
WARRANTY	<u> </u>							
UNIT	5 YEAR / 1500	HOUR COMMERCIAL / NO HOUR LIMIT FIR	ST 2 YEARS - SEE YOUR PROFESSIONAL GR	RAVELY® DEALER FOR COMPLETE WARRA	ANTY DETAILS			
DECK SHELL & FRAME			LIMITED LIFETIME					
ATTACHMENTS & ACCESSORIES								

MULCHING KIT, TRAILER HITCH KIT, LED HEADLIGHT KIT, STRIPING KIT, POWERED BAGGER KIT, OCDB KIT, SUNSHADE KIT, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, AIR RIDE SEAT KIT, LASEREDGE BLADES, TUNE UP KIT, OCDB KIT, SUNSHADE KIT, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, AIR RIDE SEAT KIT, LASEREDGE BLADES, TUNE UP KIT

PRO-TURN® EV	EV 48 SD	EV 48 RD	EV 52 SD	EV 52 RD	EV 60 SD	EV 60 RD		
MODEL NUMBER	997005	997008	997006	997009	997007	997010		
BATTERIES			4 - 16 KWH FUSION	I CORE LITHIUM ION				
WHEEL DRIVE MOTORS			5 KW PE	R MOTOR				
SPINDLE MOTORS			3.5 KW P	ER MOTOR				
DRIVE SYSTEM			PROPRIETARY ELE	CTRIC TRANSAXLES				
GROUND SPEED (Forward/Reverse)			8 MPH / 4MPH (LOW SPEED) - 1	1 MPH / 5.5 MPH (HIGH SPEED)				
DECK								
DECK MATERIAL			7	GA.				
ECK CONSTRUCTION			X-FACTO	R 3® DECK				
IUMBER OF SPINDLES				3				
BLADE TIP SPEED (FPM)		18,000						
SPINDLE HOUSING MATERIAL		CAST ALUMINUM						
SPINDLE BEARINGS		SERVICEABLE BOTTOM BEARING						
DECK ENGAGEMENT		ELECTRIC DC BRUSHLESS MOTORS						
CUTTING WIDTH	48 IN.	48 IN.	52IN.	52 IN.	60 IN.	60 IN.		
CUTTING HEIGHTS		1.5 IN 5.0 IN.						
CUTTING POSITIONS			1	5				
VHEELS								
FRONT AXLE			FIXED, GREASEABLE	CASTER FORK TUBES				
FRONT			SM00TH	13 X 6.5-6				
REAR	RADIAL TUF	RF 22 X 10-12	RADIAL TURI	F 22 X 10.5-12	RADIAL TUR	RF 22 X 12-12		
EATURES								
SEAT			HIGH BACK COMFOR	T WITH SUSPENSION				
OLDABLE ROPS			STAN	DARD				
MACHINE								
WEIGHT	1261 LBS.	1286 LBS.	1284 LBS.	1301 LBS.	1312 LBS.	1326 LBS.		
.ENGTH	83 IN.	83 IN.	83 IN.	83 IN.	83 IN.	83 IN.		
WIDTH (w/o CHUTE)	50 IN.	50 IN.	56 IN.	54 IN.	63 IN.	64 IN.		
VIDTH (w/ CHUTE)	62 IN.	50 IN.	67 IN.	54 IN.	75 IN.	62 IN.		
HEIGHT (w/ ROPS EXT/DOWN))			72 IN	/ 49 IN.				
WARRANTY								
INIT	5 YEAF	R / 1500 HOUR COMMERCIAL / NO H	OUR LIMIT FIRST 2 YEARS - SEE YOU	JR PROFESSIONAL GRAVELY® DEA	LER FOR COMPLETE WARRANTY D	ETAILS		
ATTACHMENTS & ACCESSORIES								

FUSIONCORE OFF BOARD PORTABLE CHARGER, REPLACEMENT BATTERIES, MULCHING KIT, LED HEADLIGHT KIT, BEACON LIGHT KIT, FAST CHARGE KIT WITH Y HARNESS, HIGH-LIFT BLADE KIT, OCDB KIT, FRONT CASTOR SUSPENSION FORKS, REAR TWEEL KIT, FRONT WEIGHT KIT

PRO-STANCE® EV	48SD	48RD	52SD	52RD	60SD	60RD
MODEL NUMBER	998001	998004	998002	998005	998003	998006
ATTERIES			4 - 16 KWH FUSION	CORE LITHIUM ION		
PINDLE MOTORS			5 KW PER	R MOTOR		
DRIVE SYSTEM			PROPRIETARY ELEC	TRIC TRANSAXLES		
ROUND SPEED (Forward/Reverse)			8 MPH / 4MPH (LOW SPEED) – 1	1 MPH / 5.5 MPH (HIGH SPEED)		
DECK						
DECK MATERIAL			7 GA. S	STEEL		
DECK CONSTRUCTION			X-FACTOR	® 3 DECK		
IUMBER OF SPINDLES			3	1		
BLADE TIP SPEED (FPM)			18,0	000		
PINDLE HOUSING MATERIAL			CAST AL	UMINUM		
PINDLE BEARINGS	SERVICEABLE BOTTOM BEARING					
DECK ENGAGEMENT	ELECTRIC DC BRUSHLESS MOTORS					
CUTTING WIDTH	48	IN.	52	IN.	60 IN.	
DISCHARGE	SIDE	REAR	SIDE	REAR	SIDE	REAR
UTTING HEIGHTS			1.5 IN	5.0 IN.		
CUTTING POSITIONS			1	5		
VHEELS						
RONT AXLE			FIXED, GREASABLE C	ASTER FORK TUBES		
RONT			SM00TH 13 X 6.5-6	SEMI-PNEUMATIC		
REAR			20 X 10.5	-8 TURF		
AACHINE						
VEIGHT	1204 LBS.	1203 LBS.	1240 LBS.	1236 LBS.	1265 LBS .	1264 LBS.
ENGTH	74.5 IN.	74.5 IN.	74.5 IN.	74.5 IN.	74.5 IN.	74.5 IN.
VIDTH (w/o CHUTE)	50 IN.	50 IN.	56 IN.	54 IN.	63 IN.	62 IN.
VIDTH (w/ CHUTE)	62 IN.	50 IN.	67 IN.	54 IN.	75 IN.	62 IN.
IEIGHT			46.0	IN.		
VARRANTY						
INIT	5 YEAR/1500 HOUR COMMERCIAL/3 YEAR BATTERY- SEE YOUR PROFESSIONAL GRAVELY DEALER FOR COMPLETE WARRANTY DETAILS					

MULCHING KIT, OCDB KIT, HEADLIGHT KIT, TRIMMER MOUNT KIT, PACK BLOWER MOUNT KIT, BUCKET MOUNT KIT, REAR TWEEL KIT, HIGH LIFT BLADES, BEACON LIGHT KIT, GRASS CATCHER

PRO-STANCE®	32	36	48	52	52	60	60	
MODEL NUMBER	994157	994149	994161	994162	994163	994164	994165	
ENGINE	KAWASAKI* FS600V	KAWASAKI° FS600V	KAWASAKI° FX730V	KAWASAKI° FX730V	KAWASAKI° FT730V-EFI	KAWASAKI° FX730V	KAWASAKI° FT730V	
HORSEPOWER	18	3.5	23.5 HP	23.5 HP	26 HP	23.5 HP	26 HP	
DISPLACEMENT	603	3 CC	726 CC	726 CC	726 CC	726 CC	726 CC	
DRIVE SYSTEM	HYDRO-GE/	AR° ZT-3100			HYDRO-GEAR® ZT-3400			
FUEL CAPACITY	60	GAL			9 GAL			
GROUND SPEED (Forward/Reverse)	8 MPH	/ 3 MPH			9 MPH / 4 MPH			
DECK			'					
DECK MATERIAL				7 GA.				
DECK CONSTRUCTION				FABRICATED				
IUMBER OF SPINDLES		2			3			
BLADE TIP SPEED (FPM)	18,	220			18,000			
PINDLE HOUSING MATERIAL		FORGED ALUMINUM						
PINDLE BEARINGS		BALL BEARING						
ECK ENGAGEMENT		OGURA 2.75 ELECTRIC CLUTCH						
DECK LIFT SYSTEM				MANUAL				
UTTING WIDTH	32 IN.	36 IN.	48 IN.	52 IN.	52 IN.	60 IN.	60 IN.	
UTTING HEIGHTS				1.5 IN 5.0 IN.				
UTTING POSITIONS				15				
VHEELS								
RONT AXLE				RIGID				
RONT	11 X 4.00-5 SE	MI-PNEUMATIC			13 X 6.50-6 SEMI-PNEUMATIC			
REAR	36": 18 X 8.	50-8 RADIAL			20 X 10.50 - 8 RADIAL			
MACHINE								
VEIGHT	750 LBS.	784 LBS.	995 LBS.	1015 LBS.	1015 LBS.	1043 LBS.	1048 LBS.	
ENGTH	59.5 IN.	59.5 IN.	60.63 IN.	60.63 IN.	60.63 IN.	62 IN.	62 IN.	
VIDTH (w/o CHUTE)	33.5 IN.	36.5 IN.	50 IN.	55.5 IN.	55.5 IN.	63 IN.	63 IN.	
VIDTH (w/ CHUTE)	49 IN.	49 IN.	62.25 IN.	67.75 IN.	67.75 IN.	75.25 IN.	75.25 IN.	
HEIGHT				48 IN.				
WARRANTY								
INIT	5	YEAR / 1000 HOUR COMMERC	IAL / NO HOUR LIMIT FIRST 2 Y	EARS - SEE YOUR PROFESSION	NAL GRAVELY® DEALER FOR C	OMPLETE WARRANTY DETAI	LS	
DECK SHELL & FRAME				LIMITED LIFETIME				

MULCHING KIT, OCDB KIT, HEADLIGHT KIT, TRIMMER MOUNT KIT, PACK BLOWER MOUNT KIT, BUCKET MOUNT KIT, REAR TWEEL KIT, LASEREDGE BLADES, TUNE UP KIT

Z-STANCE®	32	48	52			
MODEL NUMBER	994160	994159	994158			
ENGINE	KAWASAKI® FS600V	KAWASAI	KI® FS65 V			
HORSEPOWER	18.5 HP	22	HP			
DISPLACEMENT	603 CC	720	6 CC			
DRIVE SYSTEM		HYDRO-GEAR® ZT-3100				
FUEL CAPACITY		4.5 GAL.				
GROUND SPEED (Forward/Reverse)		7 MPH / 3 MPH				
DECK						
DECK MATERIAL	7 GA.	10	GA.			
DECK CONSTRUCTION	X-FACTOR® II	X-FAC	TOR® 3			
NUMBER OF SPINDLES	2		3			
BLADE TIP SPEED (FPM)	18,000	18,000	18,000			
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM					
SPINDLE SHAFT	STEEL					
SPINDLE BEARINGS		BALL BEARING				
DECK ENGAGEMENT		ELECTRIC CLUTCH				
DECK LIFT SYSTEM		MANUAL				
CUTTING WIDTH	32 IN.	48 IN.	52 IN.			
CUTTING HEIGHTS	2.0 IN 5.0 IN.	1.5 IN.	- 5.0 IN.			
CUTTING POSITIONS	13	1	5			
WHEELS						
FRONT		11 X 5-6 PNEUMATIC				
REAR		20 X 6.50 - 8 TURF				
MACHINE						
WEIGHT	669 LBS.	744 LBS.	763 LBS.			
LENGTH	65.5 IN.	65.5 IN.	65.5 IN.			
WIDTH (w/o CHUTE)	32.8 IN.	49.5 IN.	55 IN.			
WIDTH (w/ CHUTE)	44.8 IN.	61 IN.	66.75 IN.			
HEIGHT		47.5 IN.				
WARRANTY						
UNIT		4 YEAR / 500 HOUR COMMERCIAL				
ATTACHMENTS & ACCESSORIES						

MULCHING KIT, OPERATOR CONTROLLED DISCHARGE BAFFLE, HEADLIGHT KIT, TWEEL KIT, BLADE KIT, GRASS CATCHER

81V KAV	<b>988185</b> WASAKI* FS600V	988186			
B1V KAN	WASAKI* FS600V		988187		
		KAWASAKI" FS600V	KAWASAKI* FS691V		
	18.5 HP	18.5 HP	23 HP		
	603 CC	603 CC	726 CC		
·	HYDRO-GEA	R° ZT-2800			
	5.8 (	GAL.			
	8 MPH /	3 MPH			
	10 (	GA.			
	FABRIC	CATED			
	3	3	3		
18,000					
FORGED ALUMINUM					
BALL BEARING					
	OGURA GT1	A CLUTCH			
	MAN	UAL			
	48 IN	52 IN.	60 IN.		
1 1	1.5 IN - 5.0 IN	1.5 IN - 5.0 IN	1.5 IN - 5.0 IN		
	15	15	15		
		'			
	N/	A			
	11 X 4-5 SEMI	-PNEUMATIC			
		20 X 8-10			
	740 LBS	770 LBS	795 LBS		
	69 IN	71 IN	71.8 IN		
	50.1 IN	55.5 IN	63 IN		
	62.2 IN	67.6 IN	75.1 IN		
	45	IN			
	4 YEAR / 750 HOUR - NO H	OUR LIMIT FIRST 2 YEARS			
	N/	A			
		4 YEAR / 750 HOUR - NO H	45 IN  4 YEAR / 750 HOUR - NO HOUR LIMIT FIRST 2 YEARS  N/A		

MULCHING KIT, GRASS COLLECTOR, SINGLE WHEEL SULKY, TWO WHEEL SULKY, HEADLIGHT KIT, OCDB KIT, LASEREDGE BLADE KIT

ZT X	42	42	48	52	52	
MODEL NUMBER	918007	918008	918009	918010	918011	
ENGINE	KOHLER* KT730	KAWASAKI* FR651V	KAWASAKI* FR651V	KOHLER® KT730	KAWASAKI® FR691V	
HORSEPOWER	23 HP	21.5 HP	21.5 HP	23 HP	23 HP	
DISPLACEMENT	725 CC	726 CC	726 CC	725 CC	726 CC	
DRIVE SYSTEM		Н	YDRO-GEAR® SERVICEABLE EZT® TRANSAXI	LES		
UEL CAPACITY	3.5 GAL					
ROUND SPEED (Forward/Reverse)	7 MPH / 3 MPH					
ECK	'					
ECK MATERIAL			11 GA. STEEL			
ECK CONSTRUCTION			FABRICATED X-FACTOR®			
IUMBER OF SPINDLES	3					
LADE TIP SPEED (FPM)	18,000					
PINDLE HOUSING MATERIAL	FORGED ALUMINUM					
ECK ENGAGEMENT	ELECTRIC WARNER					
ECK LIFT SYSTEM	FOOT OPERATED					
UTTING WIDTH	42 IN.	42 IN.	48 IN.	52 IN.	52 IN.	
UTTING HEIGHT			1.5 IN 4.5 IN.			
UTTING POSITIONS			13			
/HEELS						
RONT			11 X 6 - 5 SMOOTH PNEUMATIC			
REAR	20 X 8 - 8 K808 AGGRES	SIVE TREAD TURF TIRES	20	X 10 - 8 K808 AGGRESIVE TREAD TURF TIRE	S	
EATURES						
EAT	22 IN. PLUSH HIGH BACK W/ARM RESTS & SEAT SLIDER STANDARD					
ONTROL ARMS	TOOLLESS QUICK ADJUST					
IGHTING	DUAL HIGH INTENSITY LED					
SB PORT	DUAL USB-A					
LOOR PLATE	TOOLLESS FLIP UP WITH ACCESSORY TRAY					
IOUR METER	STANDARD					
ACHINE						
VEIGHT	669 LBS.	667 LBS.	679 LBS.	691 LBS.	695 LBS.	
ENGTH	74.5 IN.	74.5 IN.	74.5 IN.	74.5 IN.	74.5 IN.	
VIDTH (w/o CHUTE)	45.1 IN.	45.1 IN.	51.1 IN.	55.6 IN.	55.6 IN.	
VIDTH (w/ CHUTE)	56.2 IN.	56.2 IN.	62.3 IN.	66.7 IN.	66.7 IN.	
IEIGHT			46 IN.	<u>'</u>		
VARRANTY						

2-BUCKET NON-POWERED BAGGER, POWERED BAGGER CONVERSION KIT, MULCH KIT, SEAT ISOLATOR KIT, TRAILER HITCH KIT, LAWN STRIPING KIT, DECK LIFT SPRING ASSIST KIT, TRANSPORT LOCK KIT, TOOL HOLDER, KICK MAT, 8" WHEEL COVERS, EQUIPMENT COVER, SEAT COVER, CAMO SEAT COVER, LASEREDGE BLADE KIT, ENTRY ASSIST HANDLE KIT, KAWASAKI TUNE UP KIT, KOHLER TUNE UP KIT

ZT XL	42	48	52	52	60		
MODEL NUMBER	918012	918013	918014	918015	918016		
NGINE	KAWASAKI® FR651V	KAWASAKI® FR691V	KOHLER® KT740 SERIES	KAWASAKI® FR691V	KAWASAKI® FR730V		
ORSEPOWER	21.5 HP	23 HP	25 HP	23 HP	24 HP		
SPLACEMENT	726 CC	726 CC	725 CC	726 CC	726 CC		
RIVE SYSTEM			HYDRO-GEAR® ZT-2800® TRANSAXLES		·		
JEL CAPACITY			3.5 GAL				
ROUND SPEED (Forward/Reverse))			7 MPH / 3 MPH				
ECK	'						
ECK MATERIAL			11 GA. STEEL				
ECK CONSTRUCTION		FABRICATED X-FACTOR®					
UMBER OF SPINDLES	3						
LADE TIP SPEED (FPM)		18,000					
PINDLE HOUSING MATERIAL	FORGED ALUMINUM						
ECK ENGAGEMENT		ELECTRIC WARNER					
ECK LIFT SYSTEM		FOOT OPERATED					
UTTING WIDTH	42 IN.	48 IN.	52 IN.	52 IN.	60 IN.		
UTTING HEIGHT			1.5 IN 4.5 IN.		1		
UTTING POSITIONS			13				
/HEELS	'						
RONT			11 X 6 - 5 SMOOTH PNEUMATIC				
EAR	20 X 8 - 8 K3012 AGGRESIVE TREAD TURF TIRES						
EATURES							
SEAT		22 IN PLUSH HIGH BACK W/ PADDED ARM RESTS AND SEAT ISOLATION					
ONTROL ARMS		TOOL-LESS QUICK ADJUST					
IGHTING	DUAL HIGH INTENSITY LED						
SB PORT	DUAL USB-A						
LOOR PLATE	TOOL- LESS FLIP UP WITH ACCESSORY TRAY						
IOUR METER		STANDARD					
AACHINE							
VEIGHT	675 LBS	689 LBS	701 LBS	705 LBS	725 LBS		
ENGTH	74.5 IN.	74.5 IN.	74.5 IN.	74.5 IN.	74.5 IN.		
VIDTH (w/o CHUTE)	45.1 IN.	51.1 IN.	55.6 IN.	55.6 IN.	63.1 IN.		
VIDTH (w/ CHUTE)	56.2 IN.	62.3 IN.	66.7 IN.	66.7 IN.	74.2 IN.		
IEIGHT	47 IN.						
ARRANTY							
NIT		4 YEARS OR 400 HOURS - SEE YOU	JR PROFESSIONAL GRAVELY® DEALER FOR	COMPLETE WARRANTY DETAILS			

2-BUCKET NON-POWERED BAGGER, POWERED BAGGER CONVERSION KIT, MULCH KIT, SEAT ISOLATOR KIT, TRAILER HITCH KIT, LAWN STRIPING KIT, DECK LIFT SPRING ASSIST KIT, TRANSPORT LOCK KIT, TOOL HOLDER, KICK MAT, 8" WHEEL COVERS, EQUIPMENT COVER, SEAT COVER, CAMO SEAT COVER, LASEREDGE BLADE KIT, ENTRY ASSIST HANDLE KIT, KAWASAKI TUNE UP KIT, KOHLER TUNE UP KIT

ZT HD	44	48	48	52	52	60	60
MODEL NUMBER	991266	991268	991274	991270	991276	991272	991278
ENGINE	KAWASAKI° FR651V	KAWASAKI* FR691V	KOHLER® KT740	KAWASAKI* FR691V	KOHLER® KT740	KAWASAKI* FR730V	KOHLER® KT745
HORSEPOWER	21.5 HP	23 HP	25 HP	23 HP	25 HP	24 HP	26 HP
DISPLACEMENT	726 CC	726 CC	725 CC	726 CC	725 CC	726 CC	725 CC
DRIVE SYSTEM			HY	DRO-GEAR® ZT-3100® TRANSAXI	.ES		
FUEL CAPACITY				5.0 GAL.			
GROUND SPEED (Forward/Reverse)				8 MPH / 4 MPH			
DECK							
DECK MATERIAL	10 GA.						
DECK CONSTRUCTION				FABRICATED X-FACTOR® 3			
NUMBER OF SPINDLES	3						
BLADE TIP SPEED (FPM)	18,576	18,576	18,576	18,136	18,136	18,464	18,464
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM						
SPINDLE BEARINGS	BALL BEARING						
DECK ENGAGEMENT	ELECTRIC WARNER						
DECK LIFT SYSTEM				FOOT OPERATED			
CUTTING WIDTH	44 IN.	48 IN.	48 IN.	52 IN.	52 IN.	60 IN.	60 IN.
CUTTING HEIGHT				1.5 IN 5.0 IN.			
CUTTING POSITIONS	15						
WHEELS							
FRONT				13 X 6.5-6 SMOOTH PNEUMATIC			
REAR	22 X 10-12 TURF 22 X 10.5-12 TURF 22 X 12-12 TURF				12 TURF		
FEATURES				'		'	
SEAT	HIGH BACK COMFORT W/ SEAT ISOLATION & PADDED ARM RESTS						
HOUR METER	STANDARD						
MACHINE							
WEIGHT	794 LBS.	802 LBS.	796 LBS.	817 LBS.	804 LBS.	841 LBS.	843 LBS.
LENGTH	79 IN.	79 IN.	79 IN.	79 IN.	79 IN.	79 IN.	79 IN.
WIDTH (w/o CHUTE)	47.6 IN.	50.8 IN.	50.8 IN.	56.2 IN.	56.2 IN.	63.7 IN.	63.7 IN.
WIDTH (w/ CHUTE)	58.8 IN.	61.9 IN.	61.9 IN.	67.3 IN.	67.3 IN.	74.8 IN.	74.8 IN.
HEIGHT	47 IN.						
WARRANTY							
UNIT		4 YEARS 0	R 500 HOURS - SEE YOUR PRO	FESSIONAL GRAVELY® DEALE	R FOR COMPLETE WARRANT	TY DETAILS	
ATTACHMENTS & ACCESSORIES							

SEAT SPRING KIT, FOLDING ROPS KIT, TRAILER HITCH KIT, POWERED BAGGER KIT, LOWER ROPS BAGGER MOUNT, OCDB KIT, MULCHING KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, SUSPENSION SEAT KIT, FRONT CASTOR SUSPENSION FORKS, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, AGGRESSIVE TIRE KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT

ZT HD STEALTH®	52			
MODEL NUMBER	991271			
ENGINE	KAWASAKI" FR691V			
HORSEPOWER	23 HP			
DISPLACEMENT	726 CC			
DRIVE SYSTEM	HYDRO-GEAR® ZT-3100® TRANSAXLES			
FUEL CAPACITY	5.0 GAL.			
GROUND SPEED (Forward/Reverse)	8 MPH / 4 MPH			
DECK				
DECK MATERIAL	10 GA.			
DECK CONSTRUCTION	FABRICATED X-FACTOR® 3			
NUMBER OF SPINDLES	3			
BLADE TIP SPEED (FPM)	18,136			
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM			
SPINDLE BEARINGS	BALL BEARING			
DECK ENGAGEMENT	ELECTRIC WARNER			
DECK LIFT SYSTEM	FOOT OPERATED			
CUTTING WIDTH	52 IN.			
CUTTING HEIGHT	1.5 IN 5.0 IN.			
CUTTING POSITIONS	15			
WHEELS				
FRONT	13 X 6.5-6 SMOOTH PNEUMATIC			
REAR	22 X 11 - 10 KENDA 3012 AGGRESSIVE TREAD TURF			
FEATURES				
SEAT	HIGH BACK, ONE OF A KIND SEAT BUILT FOR COMFORT INCLUDING SEAT ISOLATION AND PADDED ARM RESTS			
HOUR METER	STANDARD			
MACHINE				
WEIGHT	819 LBS.			
LENGTH	79 IN.			
WIDTH (w/o CHUTE)	56.2 IN.			
WIDTH (w/ CHUTE)	67.3 IN.			
HEIGHT	47 IN.			
WARRANTY				
UNIT	4 YEARS OR 500 HOURS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS			
ATTACHMENTS & ACCESSORIES				

SEAT SPRING KIT, FOLDING ROPS KIT, TRAILER HITCH KIT, POWERED BAGGER KIT, LOWER ROPS BAGGER MOUNT, OCDB KIT, MULCHING KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, SUSPENSION SEAT KIT, FRONT CASTOR SUSPENSION FORKS, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, AGGRESSIVE TIRE KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT





VISIT US ONLINE AT GRAVELY.COM









