

## GENERAL SPECIFICATIONS

MODEL	E48-200	E54-220	E60-220	E66-220	E72-240	E78-240	E86-280	E94-280	E100-310	E80-260 INV
Recommended horsepower (P.T.O.)	16@40*	16@40*	18@40*	25@40	25@40	35@65**	40@75	40@75	75@120	40@75
Cutting width	48"	54"	60"	66"	72"	78"	86"	94"	100"	80"
Cutting height	26"	28"	28"	28"	29 1/2"	29 1/2"	36"	36"	38 1/2"	33"
Fan RPM	540	540	540	540	540	540	540	540	540	540
Fan diameter	20"	22"	22"	22"	24"	24"	28"	28"	31"	26"
Fan shaft diameter	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 9/16"	1 9/16"	1 9/16"	2"	1 9/16"
Fan width	7"	7"	8"	8"	8 1/2"	8 1/2"	11"	11"	12"	11"
Fan height (ground to center)	13 1/2"	14 1/2"	14 1/2"	14 1/2"	15 1/2"	15 1/2"	18 3/4"	18 3/4"	20"	17"
Balanced fan	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
Auger diameter	17"	17"	17"	17"	17"	17"	20"	20"	23"	20"
Balanced auger	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
Chute rotation on polyethylene	Manual	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	-	-
	Hydraulic motor	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Std	Std
	Hydraulic cylinder	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	-	-
Chute 1 or 2 deflectors	1	1	1	1	1	1	1	1	1	2
Manual deflector	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
Hydraulic deflector	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Reversible carbon steel blade	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
Adjustable skid shoes	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Storage foot	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
P.T.O. shaft	T20	T20	T20	T40	T40	T40	T60	T60	T80	T60
Drive chain number	50	50	60	60	60	60	60	60	80	60
Number of safety bolts	2	2	2	2	2	2	2	2	3	2
Hitch category	1	1	1	1	1	1	2	2	2	2
Approximative weight (lbs)	420	470	506	525	570	640	967	992	1480	1055

\* Use with a drive shaft (P.T.O.) Series T40 if more than 30 HP

\*\* Use with a drive shaft (P.T.O.) Series T60 if more than 40 HP

The specifications mentioned above are subject to change without notice from us. The weight of the snowblower is given without accessories.

### SNOWBLOWER WARRANTY

Every snowblower produced by Normand Co. Ltd is guaranteed against manufacturing and raw material defects (excluding the P.T.O. shaft, gearbox, hydraulic motor and hydraulic cylinder which are covered by the OEM warranty) for a full year from the date of purchase, provided that the snowblower has not been modified or abused in any way. This warranty does not cover accidents or breaks caused by objects other than snow (metal bits, concrete, wood, asphalt, tires, etc.). We will replace or repair any defective part at no cost if they are returned F.O.B. at our plant in Saint-Pascal-de-Kamouraska, Quebec. Our obligations are limited to the replacement and/or repair of the defective part.

NORMAND®

Co. Ltd

#### Normand Co. Ltd

340, Taché Street  
Saint-Pascal (Quebec)  
Canada G0L 3Y0


Phone: (418) 492-2712  
1-888-666-7626

Fax: (418) 492-9363

E-mail: normand@cienormand.com  
Web site: www.cienormand.com



DEALER

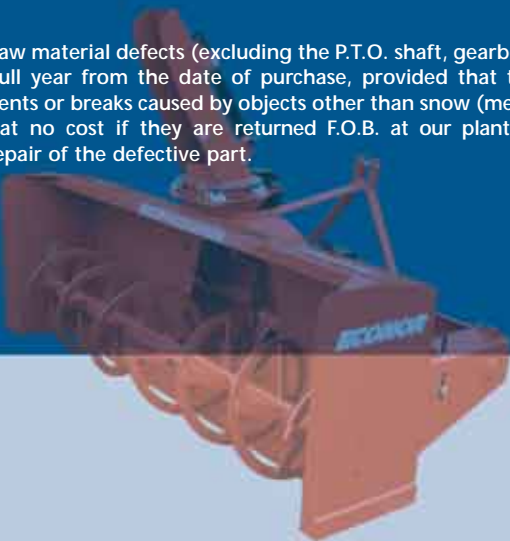

© Normand™ Co. Ltd 2012 All Rights Reserved

# ECONOR®

## SNOW BLOWERS

by **NORMAND®**



Quality - Sturdiness - Reliability

# ECONOR® SNOWBLOWERS

*Sturdy construction based on Normand commercial-grade snowblowers*

**E86-280  
E94-280**

**E72-240  
E78-240**

**E100-310**

Standard carbon steel reversible blade

Quality paint with epoxy primer

Balanced auger and fan

Gap rod for deflector adjustment (standard)

**E80-260INV**

**E48-200**

**E54-220  
E60-220  
E66-220**

Meticulous construction and full-length welding

(A) Sturdy, factory-balanced auger and fan.

(B) Carbon steel reversible blade.

(C) Discharge corrector allowing increased snow flow.



Hydraulically-powered chute rotation (optional)



Carbon Steel adjustable skid shoes (optional)




Storage foot



Chute rotation on polyethylene UHMV



Safety bolt on driving shaft and chain bender

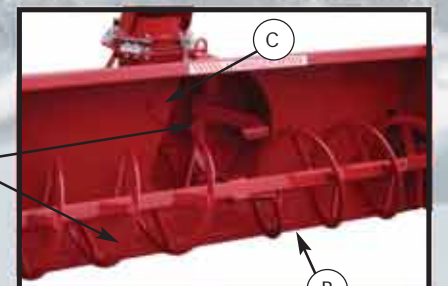

(A)

(C)

(B)