



2012

**Landscaping/
Estate
PRODUCTS**

www.mkmartin.ca



Get Swept away with



The **Kwik Brush** is a PTO powered broom for your small tractor. Ideal for clearing small debris from lots, leaves, and even light coats of snow the Kwik Brush turns your 20 to 40 hp tractor into a sweeping machine.

The Kwik Brush features hydraulic angling which can be controlled from the operators seat. This control allows you greater flexibility in determining where your material is being directed.

Adjustable front castor wheels let you set the appropriate down pressure for your job. The floating design keeps the Kwik Brush in contact with the contours of the terrain you are sweeping.

The integrated adjustable stands help prevent damage to the brush during storage. They also hold the weight of the unit making hook up to MK Martin's optional front mount kit quick and easy.

Tractor must be equipped with Mid Mount PTO and MK Martin Front Mount Kit.



Features

- 1 Hydraulic Angle Control
- 2 Height Adjustable Castors
- 3 Lock Out Pins
- 4 Poly/Wire Bristles



The PTO powered Pulsar series of Rotary Cutters provide excellent mowing and shredding performance for tractors rated between 20-90 horsepower. The 3PH mount models are available in a variety of cutting widths providing a cutting path from 42" – 120". To better adapt to your conditions the Pulsar features an adjustable cutting height of 2"-10" and a floating top link. This combination allows you to get the ideal cut for your field or roadside.

- **Cuts weeds**
- **mows grass**
- **shreds stalks**



*shown with optional chain curtains

	PRC42	PRC48	PRC60	PRC66
Shipping Weight	440	480	600	640
Hitch	Cat 1 & 2 Quick Tach Compatible (All Sizes)			
Cutting Height	2"-10"	2"-10"	2"-10"	2"-10"
Cutting Path	42"	48"	60"	66"
Tip Speed (Ft/Min)	8723	9970	12462	13708
Wheels (Segmented)	16"	16"	16"	16"
Blades	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
Tractor H.P. (min)	20	20	30	40
P.T.O. RPM	540	540	540	540
Gearbox Rating	40HP	40HP	40HP	40HP
Deck	10 GA.	10 GA.	10 GA.	10 GA.
Stump Jumper	YES	YES	YES	YES
Shear Pin	STANDARD	STANDARD	STANDARD	STANDARD


- 1** Floating Top Link: The floating top link ties into the 3PH mount but allows the Pulsar to track level across the varying terrain.
- 2** The segmented wheel doesn't contain any air taking the worry out of flat tires.
- 3** 3 Piece Blade assembly: Free swinging end blades prevent unwanted interruption during operation.
- 4** For blade service a steel plate on the mower deck can be removed allowing for increased tool access.
- 5** Optional front & rear chain curtains on 3PH models.



PRC66H	PRC72	PRC72H	PRC84	PRC120
675	700	740	1080	2300
Cat 1 & 2 Quick Tach Compatible (All Sizes)				
2"-10"	2"-10"	2"-10"	2"-10"	2"-10"
66"	72"	72"	84"	120"
13978	14955	15260	17803	12717
16"	16"	16"	16"	20"
1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
40	40	50	60	90
540	540	540	540	540
60HP	40HP	60HP	60HP	100HP
10 GA.	10 GA.	10 GA.	9 GA.	9 GA.
YES	YES	YES	YES	YES
SLIP CLUTCH	STANDARD	SLIP CLUTCH	SLIP CLUTCH	SLIP CLUTCH

The hydraulically driven Pulsar series was designed for mowing grass and light brush, up to 1" in diameter. Available in 60" and 72" cutting widths the skidsteer mount Pulsar can cut almost any desirable height.

The heavy 3/16" material deck and deck supports provide the durability for many years of dependable service. The front of the Pulsar features a push bar that bends tall grasses and brush under the deck. Our unique drive spindle is supported by 2 bearings allowing us to couple the hydraulic motor directly onto the drive spindle, eliminating the need for a gearbox.

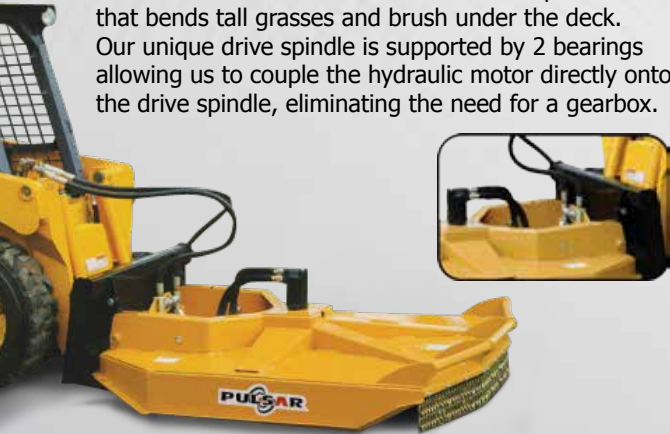

Our unique float linkage allows the **Pulsar** to follow the contour of your cutting area.

Model	Description	Weight
PRCH60	60" rotary cutter	760 LBS
PRCH72	72" rotary cutter	860 LBS

Flow Rates	Pack. Codes
14-17 GPM	A
18-20 GPM	B
20-22 GPM	B+
23-26 GPM	C
27-33 GPM	C+
33-40 GPM	D

The **Pulsar Finishing Mower** is available for a wide variety of lawn mowing applications. Available in 3 discharge sizes there is a size to fit your mowing needs. Riding on 4 pneumatic tires the Pulsar Finishing Mower floats smoothly over your lawn. A floating top link ensures that all 4 wheels keep contact with the ground as your 3PH equipped tractor pulls it along.



	PFM60RD	PFM72RD	PFM90RD
Cutting Width	57"	69"	87"
Overall Width	64"	76"	94"
Weight	464 lbs	547 lbs	714 lbs
Acres/Hr@5 MPH	3.03	3.63	4.57
HP Required	14/22	18/25	20/25
3 PT Hitch	CAT.1	CAT.1	CAT.1
RPM @ PTO Shaft	540	540	540
Number of Blades	3	3	3
Blade Tip Speed	15550	16775	15715
Wheels	4.10/3.50-4	4.10/3.50-4	4.10/3.50-4

The **Axis** Tool Arm has been developed to provide an economical alternative for mowing road side ditches or along side fences. Offset design allows plenty of room to clear the tractor tires, as well as keeping the tractor on a more level surface. Should you hit a solid object with the outer edge of the tool attached to the arm, we have shear bolt protection on a breakaway link. With a 55° cutting angle with the cylinder extended, and 90° cutting angle with the cylinder retracted, the operator has lots of flexibility to match whatever terrain he/she is working with.

- Pilot operated check valve to prevent drift in working position
- Manual lock
- Transport position for safe transporting
- Counter weight bracket, takes up to 500 lbs of suitcase weight



	AXIS4	AXIS5-6
Weight	751 lbs	900 lbs
Offset	60"	84"
Category	1	1&2
Maximum Tool Weight	480 lbs	800 lbs
4' Rotary Cutter	req. min. 30 HP	
5' Rotary Cutter	req. min. 60 HP	
6' Rotary Cutter	req. min. 80 HP	
Cutting Angle Cyl. Ext.	55°	
Cutting Angle Cyl. Ret.	90°	
Tractor Remotes Req.	2	

This two in one combination of leveling and scraping makes short work of your grading jobs. The first blade attacks the high spots cutting them down to size, the second blade further scrapes anything the first missed and fills in the hollows. With two blades cutting and filling it takes much less time and fewer passes to achieve the even distribution of material you are looking for.

The scraper can be 3PH mounted, or an optional skidsteer adapter plate puts the work in front of you.




Model	Width	Weight
578	5'	498 lbs.
678	6'	598 lbs.
778	7'	697 lbs.
878	8'	797 lbs.

Options

Optional on all models is the skidsteer adapter plate.

With two half inch reversible hardened cutting edges material is quickly leveled or redistributed to fill low points as the unit passes.

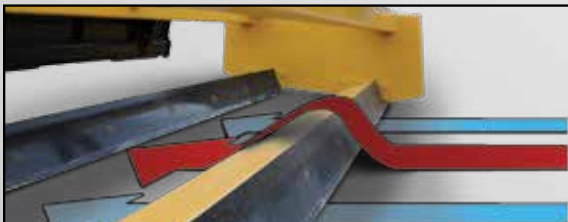

These rugged scrapers come in a range of sizes from 5 to 12 feet to fit your needs and your equipment. Standard on all models is our 1/2 inch thick reversible hardened cutting edge, ready to smooth out the bumps and fill in the hollows. Cutting depth is controlled by a 3"x8" hydraulic cylinder so you can decide how much of a bite to take and adjust on the go. An optional hydraulic power pack is available for 5', 6', and 7' tilting models. For use in landscape and estate applications. Larger models well suited for feedlot and soil reclamation or swale cutting.



Model	Width	Tilt	Weight
LLR-5	5 FT	-	550 lbs
LLR-6	6 FT	-	590 lbs
LLR-7	7 FT	-	630 lbs
LLT-5	5 FT	TILT	600 lbs
LLT-6	6 FT	TILT	640 lbs
LLT-7	7 FT	TILT	681 lbs
LLR-8	8 FT	-	1290 lbs
LLT-8	8 FT	TILT	1332 lbs
LLR-10	10 FT	-	1460 lbs
LLT-10	10 FT	TILT	1660 lbs
LLR-12	12 FT	-	1630 lbs
LLT-12	12 FT	TILT	1830 lbs
LLTPP	Hydraulic Power Pack		



Features

- Rigid and tilt models in all widths
- 1/2" x 6" reversible hardened cutting edge
- Equipped with a 10" jack or 15" available on request
- All models have 3" x 8" hydraulic lift cylinder
- Tilt models use 3" x 6" cylinder to tilt 10° each way



The **3PH Scraper Blade** from MK Martin makes maintaining your driveway and gravel areas easy. Ruggedly built with a reversible cutting edge ,these blades are designed for years of service. The built in support makes attaching quick and easy. The Manual Blades have five stops of angle adjustability including a full turn around. While the Hydraulic Angle blades allow you to control the blade from the comfort of your seat. With widths to match your equipment and property there is a MK Scraper blade to help keep your grades up.

Features

- 1/2" x 6" reversible cutting edge
- Full turn around with five locations forward and reverse on manual only
- Category 1 lifts pins
- 1/4" mouldboard





Hydraulic (optional)

Hydraulic Angle Kit with 2-1/2" x 8" Cylinder.

Hydraulically adjust your grading blade from the comfort of the drivers seat.

Heavy Duty Angle Kit

Hydraulic Angle Kit with 3" x 12" Cylinder.



Manual

Manually adjust the grader blade along five stops including the option for full turn around.

Model	Width	Hitch	Weight
588	5'	CAT I	210 lbs.
688	6'	CAT I	232 lbs.
788	7'	CAT I	250 lbs.
798	7'	CAT II	492 lbs.
898	8'	CAT II	532 lbs.

The **3PH Box Scraper** by MK Martin provides the small and large property owner with affordable options for grading with their line of box scrapers. Complete with steel cutting edges, height adjustable shanks, and a fully welded 3PH design these Box Scrapers really deliver.

The MK Box Scraper features two steel cutting edges. One located on the inside of the box and one on the outside. These two reversible hardened steel cutting edges allow the operator to pull or push material.



The height adjustable scarifier shanks break up the soil allowing the cutting edge to redistribute the material as the box scraper is pulled along.



Replaceable Scarifier Tips on removeable shanks.



Control how deep the scarifier rips with the Box Scrapers easy to use pin adjustment on the shanks.

Model	Width	Weight	CAT
448 STD	4'	320 lbs.	1
560 STD	5'	370 lbs.	1
448 HD	4'	355 lbs.	1
560 HD	5'	400 lbs.	1
566 HD	5.5'	415 lbs.	1
672 HD	6'	450 lbs.	1
784 HD	7'	505 lbs.	1
672 DLX	6'	490 lbs.	2
784 DLX	7'	570 lbs.	2
896 DLX	8'	620 lbs.	2

This general purpose **3PH Utility Dump Box** comes in two sizes for the home owner, landscaper or wood lot owner.

Features

- 3PH hookup Category 1
- Quick and easy dump
- Raise and lower to desired height for loading
- Heavy duty tubular sub frame
- 14 ga. material box structure



Model	Cap	Size	Weight
495	30 cu. ft.	18 x 48 x 48	290 lbs.
395	10 cu. ft.	10 x 36 x 36	120 lbs.

The next best friend your horse could have, other than you, is this easy to use **Track Groomer**. Use the Track Groomer to provide sure footing and easy on the feet riding areas.

Need to mix in some sand or any other material in your riding areas? This is the tool you've been looking for!

Work up your round pen with this easy to use, inexpensive Track Groomer. All you need is a tractor with a 3-Point Hitch. No PTO required.

Get within 2" of your walls or fences. No more shovels or built up sides in your arenas or outdoor riding pens.



Model	Size	Weight
TG 5	5 ft.	200 lbs
TG 6	6 ft.	275 lbs
TG 7	7 ft.	300 lbs
TG 8	8 ft.	325 lbs

Groom your track or arena surface with the MK Martin **Track-Curry**. This easy to use tool will allow you to condition the surface of your track to your desired firmness. With two rows of heavy duty S-tines to cultivate the ground, an adjustable leveling bar fastened to the rear of the S-tines and 12" rolling drum behind the leveling bar provides an accurate depth gauge to cultivate and pack your soil for optimum performance. The MK Martin Track-Curry will condition your arena/track to the footing most suited to the health and safety of your horses.



Models	TC-5	TC-6	TC-7	TC-8
Working Width	5'	6'	7'	8'
Number of Shanks	13	15	17	19
Shank Size	1-1/4" x 1/2 x 22"			
Shank Clearance	16"	16"	16"	16"
Hitch	CAT. 1	CAT. 1	CAT. 1	CAT. 1
HP Rating	18 to 32	22 to 39	26 to 47	30 to 53
Weight	460	530	640	725
Leveling Bar	1/2" x 6"/ double beveled			