
Tracked undercarriage systems for grain carts

Unverferth. Manufacturing Company, Inc.



When your farming practices necessitate the use of tracked equipment, look to the Unverferth "tracked" advantage for greater durability, flotation and smoother travel to get you in and out of the field in the shortest time possible. Available exclusively on Brent, Killbros, Parker and Unverferth grain carts.

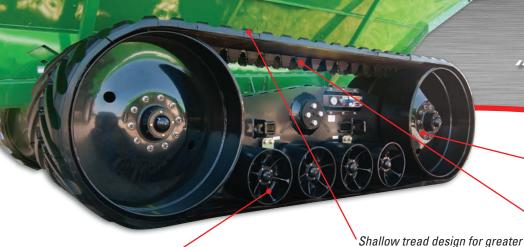

The Unverferth "Tracked" Advantage

 40" steel idler wheels keep proper tensioning for smoother transport

Chamfered edge on cast bogie wheels, along with lug guide design, for true tracking performance

Independent cast bogie wheel design for more uniform ground contact and weight distribution, and less point load on individual axles

- Hydraulic tensioning adjustment for easier track alignment, optimum ground contact and even weight distribution
- Hydraulic accumulator maintains pressure and is easily recharged with tractor hydraulics using included hoses
- 3-3/4" end wheel spindles with 10-bolt hubs
- Cast bogies with 2-3/4" spindle
- All bearings feature triple-lip seals and externally mounted grease points for long-term dependability and easy maintenance
- Shallow tread design for greater flotation, maneuverability and easier turning without berming
- Fully molded tread bars for long-lasting performance
- Chamfered edge on cast bogie wheels, along with lug guide design, for true tracking performance
- Highly durable track carcass features state-ofthe-art rubber compounding technology
- Steel belting provides stiffness and durability with helically wound cable to retain shape
- All tracks factory tested for proper alignment and operation
- Optional auto-greaser for automatic application at more frequent intervals for consistent, optimum lubrication of track undercarriages



flotation, maneuverability and

easier turning without berming

Optional automatic greasing system



Hydraulic tensioning

Unverferth track system specifications

	1,000- and 1,100-bushel carts	1,200- and 1,300-bushel carts	1,500- and 2,000-bushel carts
Bogie Wheels	8	16	16
Pivot Shaft Diameter	6"	6"	7"
Belt Width	3'	3'	3'
Belt Length	10'10"	12'4"	12'4"
Ground Contact Length	7'6"	8'9"	8'9"
Ground Contact Area (square inches)	3,240	3,780	3,780
Approx. Weight (lbs.)	11,500	13,800	14,350

See your nearest Brent, Killbros, Parker or Unverferth dealer today for complete details on the Unverferth "tracked" advantage on your new grain cart. Visit our website at unverferth.com or call 1-800-322-6301.

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice.



P.O. Box 357 Kalida, Ohio 45853 (419) 532-3121 unverferth.com Please remind all family members and others to use caution and follow recommended safety practices when around all farm equipment. Unverferth Manufacturing Co., Inc., supports the efforts of Farm Safety 4 Just Kids and all other organizations that promote farm safety.

©2014 Unverferth Manufacturing Co., Inc. Printed in U.S.A.

® ™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon and Canada





TRACK413160-Elec