



40' HEAVY-DUTY NO-TILL

The Great Plains 3S-4010HD is a drill that can get big jobs done in a hurry! Its heavy-duty frame is equipped with enough weight to handle hard ground and the toughest double crop conditions. The drill's six massive 18 x 22.5 tires

keep it afloat when things are soggy in the spring. Between end-to-end box flex and the floating hitch, this unit covers even the nastiest terrain with accuracy and ease.



40' HEAVY-DUTY NO-TILL MODELS

FEATURES & BENEFITS

40' Heavy-Duty No-Till Drills	Working Width	Transport Width	Transport Height (w/o Markers)	Engine H.P. Required	Row Spacing	Weight
3S-4010HD	40'	15'	8' 10"	325+	7.5", 10"	37,440-40,400
3S-4010HDF	40'	15'	8' 10"	325+	7.5", 10"	37,910-40,870

See www.greatplainsag.com for complete specifications.

3-Section Models

3S-4010HD, 3S-4010HDF



COULTER-ASSISTED OPENER SYSTEM

This system splits no-till seeding into two operations: penetration and seed placement. Preloaded at 450 lbs., frame-mounted coulters get the job done by working at the desired depth, ensuring optimum seed




placement for a uniform stand. Increase coulters depth to penetrate hard, dry soils, or reduce coulters depth in soft conditions. This allows the 10HD Series parallel linkage, double-disc openers to properly place the seed. Seeding depth is set by the 18-position T-handle at the rear of the opener.

ADDITIONAL STANDARD FEATURES

- Acremeter
- Frame-mounted coulters (unit-mounted are optional)
- 15" 4mm blades
- Ground drive
- 1¾"-wide fluted feed cups w/ powdered metal flutes
- 205 triple-lip sealed bearings
- 3.2 bu./ft. seed box capacity w/ seed level indicator
- V-bottom dividers
- 17½"-wide folding walkboard and ladder
- Point-row clutch
- Planter seed tubes and flaps
- LED safety lighting


*only available by ordering through Parts

OPTIONS (see website for complete list of features & options)



LEAD COULTER OPTIONS

Choose between a wide ¾" wavy blade, a 5/8" Turbo coulters blade that is aggressive and prepares a mini seedbed ahead of the opener, or a 5/16" fluted coulters blade that penetrates easily to perform minimum tillage.

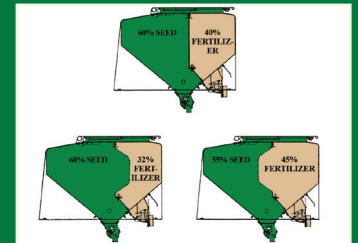


ALL SEED OR SEED & DRY FERT.

Choose all seed or seed/fertilizer models. Fertilizer units let the operator partition off the large 3.2 bu./ft. seed box to get the best ratio of seed to fertilizer. Partitions include: 60% seed to 40% fertilizer, 68% seed to 32% fertilizer, or 55% seed to 45% fertilizer.




PRESS WHEEL OPTIONS

Single press wheel options include 3"x13" double rib*, 3"x13" center rib, or 2"x13" smooth. Double press wheels include 1"x12" double-V or 1.25"x13" wedge-style.



NARROW TRANSPORT

This 40' machine folds to a narrow 15' width for transport.



FLOATING TONGUE

Allows the drill to follow contours in the field and eliminate negative tongue weight during field turns.



WEIGHT BRACKETS



SMALL SEEDS BOX



ROW MARKERS



SHAFT MONITOR



SEED FIRMERS