



30' & 40' STACK-FOLD

The 3P3025AH and 3P4025AH Stack-Fold Planters bring a new level of accuracy and simplicity to the mounted stack-fold planter line. Individual hoppers on each row, positive 3-section ground drive, and the proven accuracy of both the Great Plains

25 Series opener and the Air-Pro® metering system make these simple, highly-productive machines. The 3P3025AH and 3P4025AH are the perfect option for cost-conscious operators who want a planter with individual hoppers.



30' & 40' STACK-FOLD

30' & 40' Stack-Fold	Working Width	Transport Width	Transport Height	Engine H.P. Required	Row Spacing	Base Weight	Seed Capacity
3P3025AH	24' - 30'	12' 1" - 16' 4"	12' 9"	150+	15", 20", 22", 30", 36", 38", 40", TR30", TR36", TR38", TR40"	9,299 - 14,595	1.6 bu./row (twin row); 3 bu./row (single-row configurations)
3P4025AH	36' - 40'	24' 3"	12' 8"	260+	30", 36", 38", 40", TR30", TR36", TR38", TR40"	12,500 - 18,400	

See www.greatplainsag.com for complete specifications.



ADDITIONAL STANDARD FEATURES

- Advanced air delivery system
- Air-Pro® metering system
- 3-section ground drive
- Heavy-duty down-pressure springs (up to 500 lbs./row)
- Cast blade separator w/ fertilizer tubes
- Clear-Shot® seed tubes
- 3-section flexibility
- LED safety lighting

OPTIONS (see website for complete list of features & options)



GAUGE WHEEL SCRAPERS



LIFT-ASSIST WHEELS



HYDRAULIC DOWN PRESSURE




HYDRAULIC DRIVE W/ CONTROLLER




COULTERS & ROW CLEANERS

FEATURES & BENEFITS

25 SERIES ROW UNIT

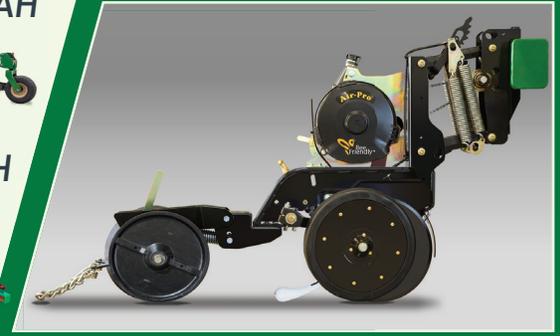

The 25 Series row unit utilizes ductile cast parallel arms for long-term row unit stability. 15", 4mm blades turning on 205 triple-lip sealed bearings ensure long life and accurate seed depth. Blades are offset 1/2" to slice residue and form a perfect seed trench.



AIR-PRO® METER

This simple, positive air pressure meter offers the highest level of singulation on the market today, and achieves uniform spacing by "dead-dropping" seed into the patented Clear-Shot® seed tube. Gentle on seeds, it is more efficient than a vacuum meter and requires less maintenance.



CHOOSE A PRESS WHEEL

Choose (from left) cast for sticky Delta soils; wedge to "pinch" the seed trench together while providing a wide footprint; 1"x12" double-V for all-around performance; or spider wheels with drag chains that aggressively close the seed trench.



SEED CAPACITY

1.6 bu./row hoppers on twin-row models and 3.0 bu./row hoppers (shown) on single-row models.



AVAILABLE ROW SPACINGS

Multiple row spacings are available to match a variety of needs, including 30", 36", 38", and 40" single- or twin-row configurations.



CHOOSE YOUR MOUNTING

These planters are available as Cat. 3/4 3-point mounted (shown), or optionally as 2-point mounted with lift-assist wheels.