



10'-25' CUSTOM PLANTERS

The 4-, 6-, 8-, and 10-row Yield-Pro® Planters from Great Plains give smaller farmers access to the same yield-increasing technologies found in larger planters. Offered in four sizes, these compact planters are designed around the Air-Pro®

metering system, delivering a new level of spacing and seed placement accuracy. For added versatility, these planters can be ordered in single- or twin-row spacings and are available in either 3-point mounted or pull-type configurations.



10'-25' CUSTOM PLANTERS

FEATURES & BENEFITS

10'-25' Custom Planters	Working Width	Transport Width	Transport Height w/o Markers	Engine H.P. Required	Row Spacing	Base Weight	Seed Capacity per Row
YP425A	10'-13' 4"	10'-15'	6' 6"	75+	30", 36", 38", 40", TR30", TR36", TR38", TR40"	2,500-3,400	1.6 bu., 3 bu.
YP425A3P	10'-13' 4"	10'-15'	6' 6"	85+		3,000-4,800	1.6 bu., 3 bu.
YP625A	15'-20'	15'-20'	6' 6"	95+		3,700-4,800	1.6 bu., 3 bu.
YP625A3P	15'-20'	15'-20'	6' 6"	100+		4,200-6,200	1.6 bu., 3 bu.
YP825A	20'-25'	20'-26'	6' 6"	115+		5,000-7,000	1.6 bu., 3 bu.
YP825A3P	20'-25'	20'-26'	6' 6"	115+		5,000-8,000	1.6 bu., 3 bu.
YP1025A3P	22', 25'	22' 7", 26'	8' 9", 6' 6"	130+		22", 30"	6,100

See www.greatplainsag.com for complete specifications. Specifications are subject to change without prior notification. Images may not depict current or standard production models.

4-ROW




6-ROW



8-ROW




25 SERIES ROW UNIT

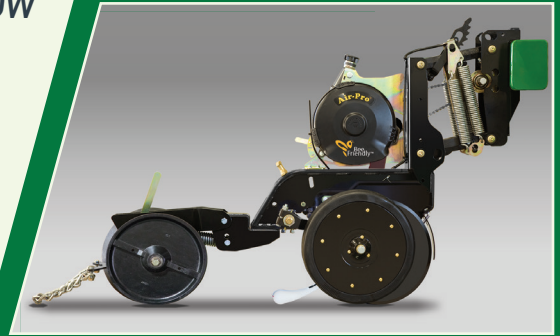

The 25 Series row unit utilizes ductile cast parallel arms for long-term row unit stability. 15", 4mm blades turning on 205 triple-lip sealed bearings ensure long life and accurate seed depth. Blades are offset 1/2" to slice residue and form a perfect seed trench.


ADDITIONAL STANDARD FEATURES

- First set of seed discs included (additional seed discs are optional)
- Side-depth wheels are 2 1/2"-wide for twin row models; 3"-wide for 22" models; 4"-wide for 30", 36", 38", and 40" models
- Low hydraulic requirements
- Air-Pro® metering and fan system
- 7" square frame tubing
- 8R19.5 LT gauge wheel tire
- Heavy-duty row unit down-pressure springs (up to 500 lbs./row)
- Blade separator w/ stainless fertilizer tube
- Clear-Shot® seed tubes
- DICKEY-john® PM300 seed monitor w/ speed sensor
- Ground-engaging positive drive system
- Clevis or single strap hitches
- LED safety lighting



AIR-PRO® METER

This simple, positive air pressure meter offers the highest level of singulation on the market today, and achieves uniform spacing by "dead-dropping" seed into the patented Clear-Shot® seed tube. Gentle on seeds, it is more efficient than a vacuum meter and requires less maintenance.

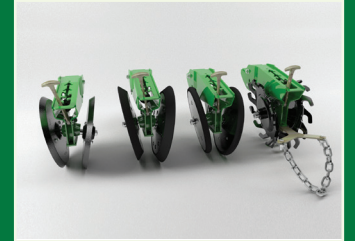

CHOOSE A PRESS WHEEL

Choose (from left) cast for sticky Delta soils; wedge to pinch the seed trench together while providing a wide footprint; 1"x12" double-V for all-around performance; or spider wheels with drag chains for aggressively closing the seed trench.



SEED CAPACITY

1.6 bu./row hoppers on twin-row models and 3.0 bu./row hoppers (shown) on single-row models.



AVAILABLE ROW SPACINGS

Multiple row spacings are available to match a variety of needs, including 30", 36", 38", and 40" single- or twin-row configurations.



PULL-TYPE OR 3-POINT

Choose 3-point mounted or pull-type configurations. Pull-type machines can be optioned with either liquid or dry fertilizer.

OPTIONS (see website for complete list of features & options)



GAUGE WHEEL SCRAPERS



MARKERS



LIQUID OR DRY FERTILIZER



FERTILIZER DRIBBLERS



COULTERS & ROW CLEANERS