


DEMOLITION GRAPPLE BUCKET CONSTRUCTED FOR YOUR TOUGHEST JOBS



- The DG series is constructed from high strength steel to withstand extreme work conditions.
- Two independent hydraulic cylinders will easily pick-up un-even loads.
- Hinge points utilize 1-1/2" diameter with (8) eight greaseable pins.
- Hose spring keeps hydraulic hoses out of the dirt and away from tracks and tires.
- Protective guarding over the hydraulic cylinders and lines to prevent damage.
- Recommended for loaders with operating capacities of greater than 1500 lbs.
- Reinforced 1/2" Grd-80 bucket tines and grapple jaw tines with 80,000 psi minimum yield strength.
- 1/2" AR-200 abrasion resistant wear plate on bottom of bucket tines.
- 2-1/2" bore, 2" stroke, 1-1/2" rods, and 1-1/2" cylinder pins.
- Hoses from grapple to loader included with quick attach couplers. Standard hose length is 72".

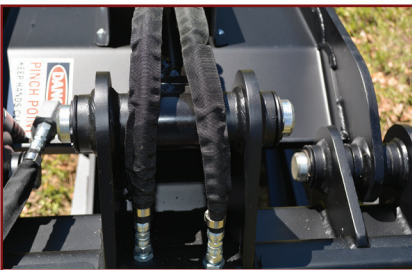

(8) 1-1/2" Greaseable Pins



Two Independent Hydraulic Cylinders

SPECIFICATIONS	DG - 72	DG - 84
A) Overall Bucket Width:	74.000	86.000
B) Bucket Depth:		35.300
C) Bucket Height:		24.500
D) Grapple Jaw Opening:		42.000
E) Height with Grapple Closed:		30.600
F) Independent Grapple Width:		21.000
G) Space Between Tines:	9.000	9.300
H) Overall Grapple Width:		63.000
Number of Tines:	9	10
Approximate Weight:	1,253 lbs.	1,392 lbs.



Side View

