


MOTORIZED FEEDERS



Serving the agricultural producers since 1970!

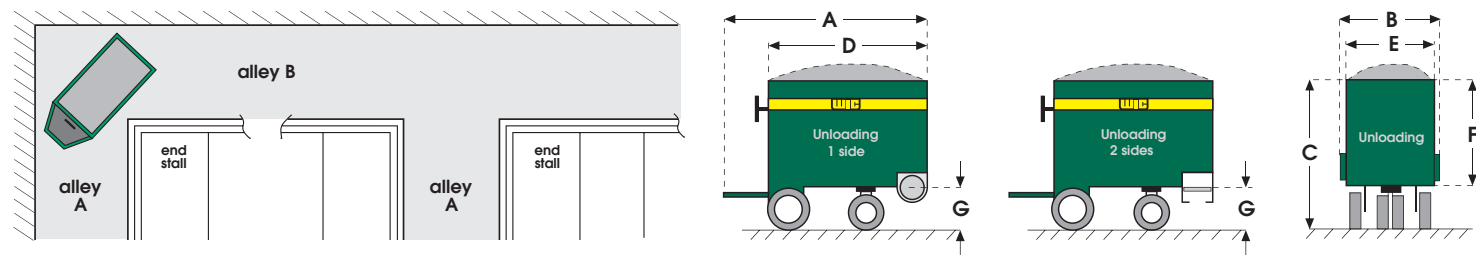

ALLEY REQUIREMENTS

MODEL 32		MODEL 45		MODEL 52		MODEL 60		MODEL 70		MODEL 90	
Alley A	Alley B	Alley A	Alley B	Alley A	Alley B	Alley A	Alley B	Alley A	Alley B	Alley A	Alley B
36" (90 cm)	57" (145 cm)	37" (94 cm)	60" (152 cm)	40" (102 cm)	70" (178 cm)	44" (112 cm)	76" (193 cm)	48" (121 cm)	82" (208 cm)	56" (142 cm)	90" (229 cm)
38" (95 cm)	54" (137 cm)	39" (99 cm)	59" (150 cm)	42" (106 cm)	68" (173 cm)	46" (117 cm)	74" (188 cm)	50" (127 cm)	79" (200 cm)	62" (157 cm)	85" (216 cm)
40" (100 cm)	53" (134 cm)	42" (106 cm)	57" (145 cm)	46" (117 cm)	65" (165 cm)	50" (127 cm)	72" (183 cm)	56" (142 cm)	75" (190 cm)	65" (166 cm)	82" (208 cm)
44" (110 cm)	51" (129 cm)	45" (114 cm)	55" (140 cm)	50" (127 cm)	62" (157 cm)	56" (142 cm)	70" (178 cm)	62" (157 cm)	73" (185 cm)	70" (178 cm)	78" (198 cm)
48" (121 cm)	49" (124 cm)	48" (121 cm)	53" (135 cm)	54" (137 cm)	60" (152 cm)	60" (152 cm)	68" (173 cm)	65" (165 cm)	72" (182 cm)		

DIMENSIONS AND CAPACITIES

MODEL AND TYPE OF UNLOADING	A Overall Length	B Overall Width	C Overall Height	D Tub Length	E Tub Width	F Tub Height	G Unloading Height	Volume * Tub Capacity	Weight Empty machine
32 Par le bas	74" (188cm)	31" (78cm)	59 1/4" (148 cm)	56" (142cm)	28" (70cm)	44" (110cm)	12" (30cm)	30 minots 38,5 pi ³ 1,1 m ³	775 lbs 350 kg
45 Par le bas	80" (203cm)	33" (83cm)	59 1/4" (148 cm)	62" (157cm)	30" (76cm)	44" (110cm)	12" (30cm)	37 minots 47,5 pi ³ 1,3 m ³	925 lbs 420 kg
52 Par le bas	86" (218cm)	37" (93cm)	63 1/4" (158 cm)	68" (173cm)	34" (86cm)	48" (120cm)	12" (30cm)	51 minots 65,5 pi ³ 1,9 m ³	1025 lbs 465 kg
60 Par le bas	90" (229cm)	41" (105cm)	63 1/4" (158 cm)	72" (183cm)	38" (97cm)	48" (120cm)	12" (30cm)	62 minots 75,5 pi ³ 2,1 m ³	1085 lbs 492 kg
70 Par le bas	98" (245cm)	45" (113cm)	63 1/4" (158 cm)	80" (203cm)	42" (107cm)	48" (120cm)	12" (30cm)	74 minots 95 pi ³ 2,7 m ³	1125 lbs 510 kg
90 Par le bas	114" (285cm)	45" (113cm)	63 1/4" (158 cm)	96" (240cm)	42" (107cm)	48" (120cm)	12" (30cm)	88 minots 38,5 pi ³ 3,2 m ³	1225 lbs 555 kg

* Volume includes conic overloading of 6" (15,2 cm).

WIC Warranty

All WIC products have a one-year warranty (tires and labor not included) against all manufacturing defects. WIC reserves the right to modify manufacturing and specifications of its products without notice or incurring the obligation to effect those changes on products already sold. This warranty is valid under normal use for which the machine was made.

WIC Liability

WIC, its dealers and/or agents cannot guarantee individual results from the use of the WIC equipments due to factor beyond our control. Even if the WIC equipments are very safe when operation procedures are followed, accidents which may occasionally result from equipment failure are not liable to WIC. The security use of this equipment does not eliminate all the risks connected to its use.



Phone : 819.398.7575
Toll free : 1.877.390.7575
Fax : 819.398.7557
service@interwic.com
www.interwic.com

784 Principale, C.P. 356, Wickham Qc J0C 1S0

Your dealer

Printed in Canada

MOTORIZED FEEDERS SILAGE DISTRIBUTORS



- Even distribution of silage and total mixed ration.
- Selection of six different models : WIC-32, WIC-45, WIC-52, WIC-70 ET WIC-90.
- Four types of discharge systems available : one side, two-side, top unload or front unload.
- 5.5HP, 9HP or 11HP Honda motors.
- Forward and reverse variable speed.
- Long powerful hay beaters included with all models.
- D662H chains that do not stretch.
- Shock absorber system preventing the transmission of the vibrations of the motor for an outstanding stability of the running board.
- Hinged panels for easy maintenance access.
- Secure filling of the gas tank.

6 capacities available



MOTORIZED FEEDERS SILAGE DISTRIBUTORS

WIC

WIC means quality!

No need to say that our motorized feeders are the best on the market. For more than 40 years, the agricultural industry knows that WIC means quality.

One of the reasons for this success is our care to bring you agricultural equipments that will answer your needs for today and tomorrow. Our research and development team gives great attention to the constant improvement of our products by taking into account comments from many users.


Outstanding stability

The gas motor (5.5, 9 or 11HP) of our feeders is supported by a rubber shock absorbers system, which prevents the transmission of vibrations in the running board. Therefore, you can work with outstanding stability.

High maneuvering precision

Two types of transmission are available and allow to obtain variable forward and backward speed:

- with hydraulic drive or with differential.

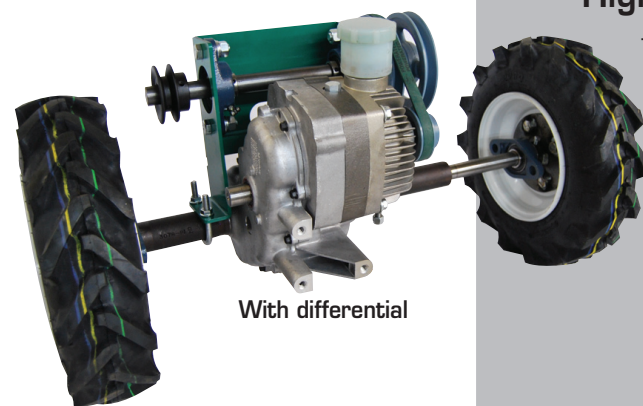

With differential



Hydraulic drive

Accessibility and greater safety of the gas tank

The gas tank cap is integrated to the silage distributor's body. The reservoir is easier to fill and the location of the cap offers more safety by preventing accidental spills of gas on the motor during filling.

A sturdy removable guard prevents the accumulation of fragment on the motor.

Heavy-duty components for outstanding performance

WIC Motorized Feeders are equipped with D662H pintle chains that do not stretch and long hay powerful beaters.

One-side and top unloading are made through a 12" (30 cm) auger while a side conveyor insures unloading on two-side.

Easy access to mechanical parts




Two hinged panels located on the side of our motorized feeders facilitate the maintenance and the adjustment of the mechanical parts.

More room on the running board

The running board of our feeders is very practical. The location of the pedals, the hidden hydrostatic pump and the motor well integrated to the body give room to move freely on the running board.

Features :

- Hydrostatic pump integrated into the differential or with hydrostatic motor on both wheels.
- Nylon bearings conveyor offering durability and corrosion resistance.
- Direction gearbox and steel wires.
- 8500 lbs strain conveyor equipped with D662H chains.
- #40 roller chains activating the grinders and the auger.
- Two 16" (40 cm) traction wheels
- Two directional 12" (30 cm) front wheels on roller bearings (4 wheels on model 70 & 90)

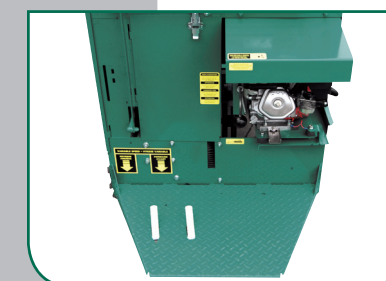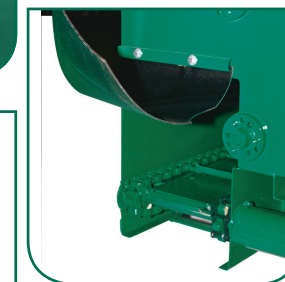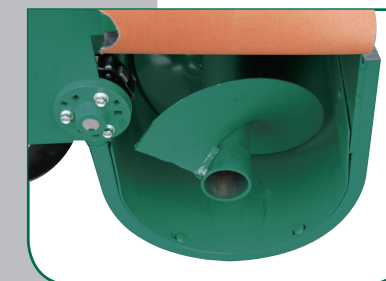

Optional accessories :

- Front unloading on models 45, 52, 60, 70 & 90.
- Electric starter and battery on 9HP & 11HP motors.
- 4 front steering wheels on model 52.
- Front and back flat-proof tires.
- Removable trough for one-side and front unloading feeders.
- Seat.