


MANDAKO

CHISEL FLEX

SOLID DESIGN...PROVEN PERFORMANCE

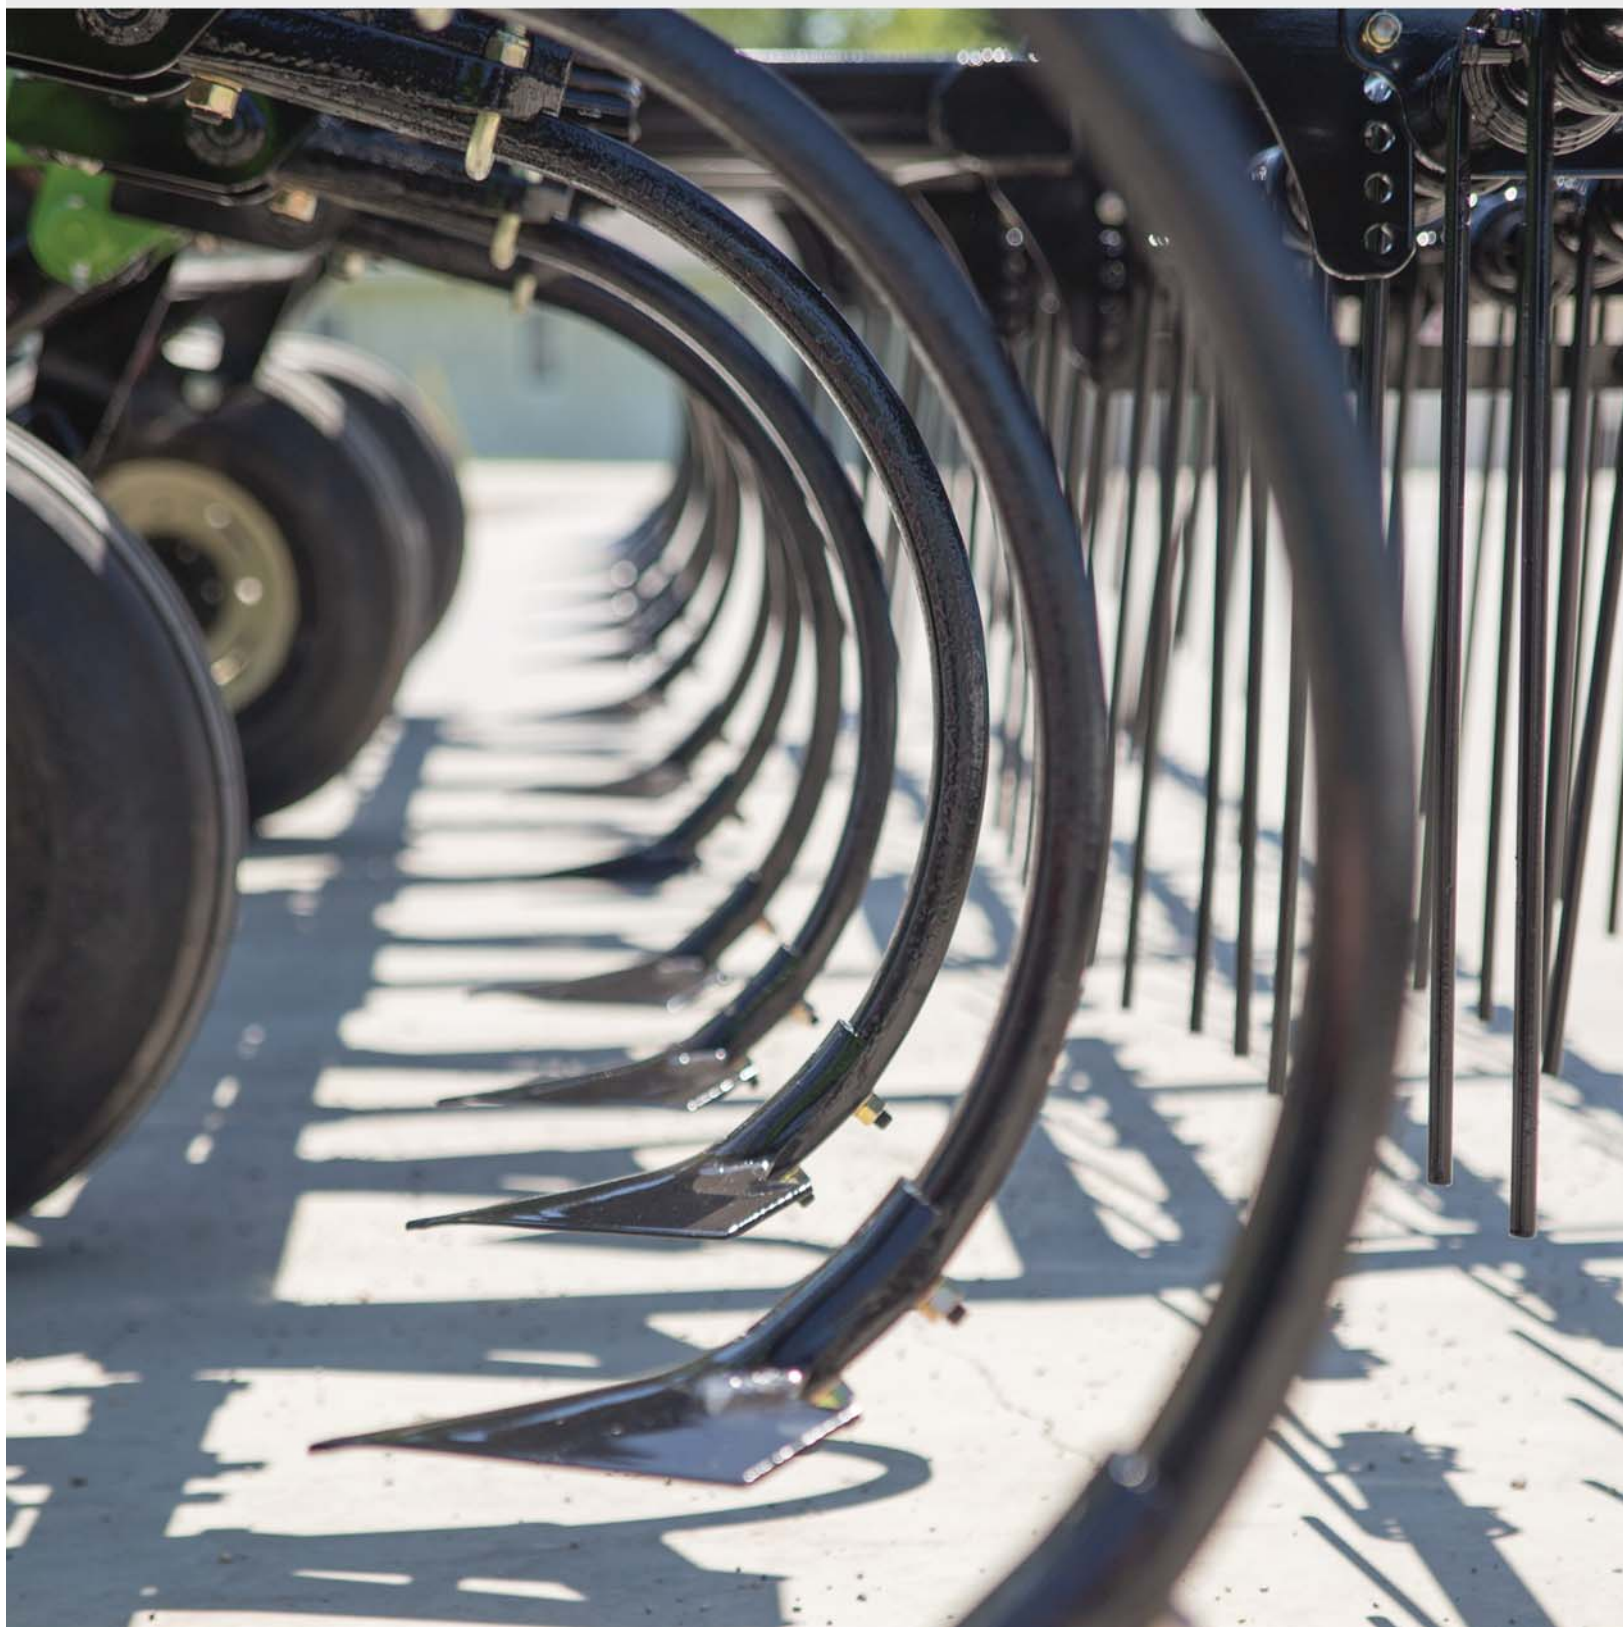

Mandako's Chisel Flex

Features

Standard width of 40'

Frame Size: 4 x 4 x 1/4 & 3/8"

3-Row HD Tine Harrow

650lb Trip Specs

Hub Size: 6-Bolt (H618)

12.5L Floation Tire

Super Flex Frame

Minimum Maintenance Grease Points

Floating Hitch

Pintle <Cat 3> Hitch

Benefits

Keeping your cultivator parallel to the ground is the best way to maximize performance. Mandako's Chisel Flex™ machines come with a floating hitch, heavy frame tubing and 6 flex points to help you get your work done.

BUILT TO LAST

Today's farmers expect longevity and durability from the equipment that they own. Mandako's Chisel Flex frames are built to last using 1/4" wall tubing in most areas and upgrading to 3/8" in strategic locations.

The unit has complete flexibility in all sections so there are no torsional stresses in the frame and easier pulling as the depth is more consistent. Plenty of mud room and trash clearance around the wheels and walking beams.

Specifications

# of Sections	3
# of Rows	4
Spacing	12"
Working Width	40'
Transport Width	19'
Transport Height	16'-8"
Weight	15,000 lbs
Tires	12.5L
HP Requirements	280 - 400
Hydraulic Ports	2

MANDAKO

Take a look at our other products



Grain Wagon

The Mandako GRAIN WAGON features auto-steer front axle, hydraulic rear axle suspension, 1200 bushel capacity and 20" unload auger (approx. 400 bushels/min).



5-Plex Land Roller

The Mandako 5-plex LANDROLLER features working widths up to 85' with 5/8" drum.



3-Plex Land Roller

Use the Mandako LANDROLLER to increase seed germination, increase crop yield, promote faster decomposition of residue and reduce repairs on expensive equipment.



Twister

The Mandako TWISTER is a true Vertical Tillage machine. Use it for the lightest pre-tillage applications in the spring and for heavy residue management in the fall... and everything in between.

www.mandako.com
info@mandako.com
(888) 525-5892

Contact your local dealer for details: