

rehlko

Kohler Engines
is now Rehlko




Command® SH270

Gasoline Engines

4.8 kW | 6.5 hp

Discover the configurable solution
for all the equipment in your fleet.

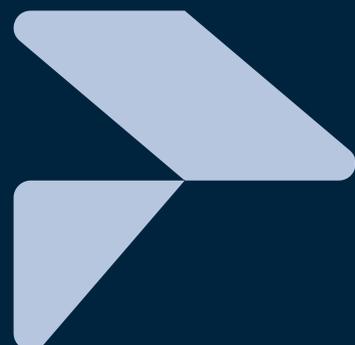

Designed for the *consumer.* Built for the *pro.*

Tough as nails. The hard-working KOHLER® SH Series™ engine is designed for quick, easy maintenance. Heavy-duty features like a cast-iron cylinder liner give consumers the same engine protection the pros need. Larger displacement results in more power. Built to last, so you get more hours out of your equipment.

Popular factory options

12-Volt starter

Exhaust deflector

Spark arrestor

3- And 10-Amp
charging systems

Crankshaft/pto variations
(keyed, tapered, threaded)

Low-profile air cleaner
and muffler (generator)

EU noise-compliant

Oil sentry™ automatic
low-oil shutdown system

EMC/RFI-compliant

Fuel secure™ auto
fuel shutoff



Added protection with oil sentry™
automatic low-oil shutdown
system

Built to last with heavy-duty
crankshaft and cast-iron cylinder
liner



Effortless starts with large
indexable recoil starter and dual
ball bearings

Smooth operation from reduced
noise and vibration

Stop less and work more with
large fuel tank



Easy maintenance and less
downtime with dual oil fills and
drains

Simple, easy-access controls
and no-tools-required air cleaner

SH Series

Standard features

OHV slant cylinder

Cast-iron cylinder liner

Large-capacity metal
Fuel tank

In-neck fuel

Debris screen

Water trap in carburetor

Electronic ignition

Quiet muffler with
heat shield

Carb Tier 3-compliant

Easy-access throttle,
choke and fuel shutoff

Automatic compression release

Mechanical governor

Sound-deadening
alloy crankcase

Dual ball bearings

Carburetor bowl drain

Dual oil fills and drains

Dual-element air cleaner

High-inertia flywheel

Silenced air intake

Indexable easy-pull™
recoil starter


Remote throttle (built-in)

2-Year consumer
limited warranty




SH Series

6.5 HP Engines

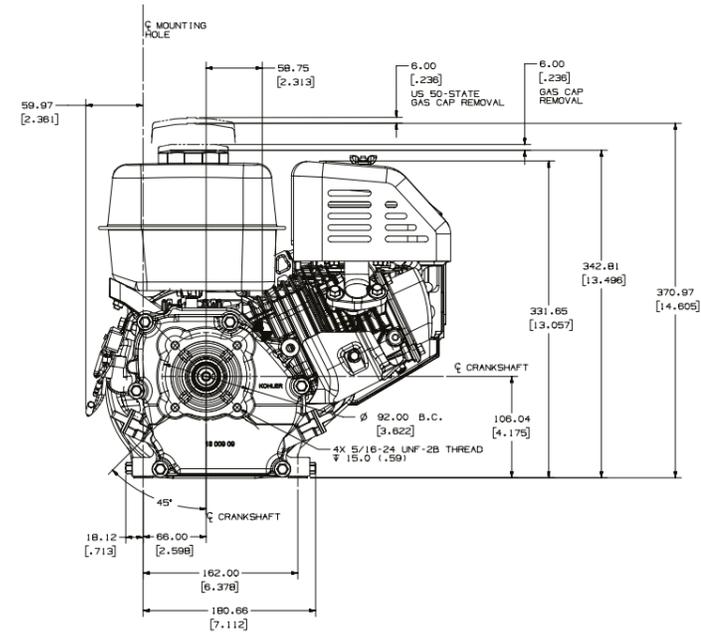


PTO view

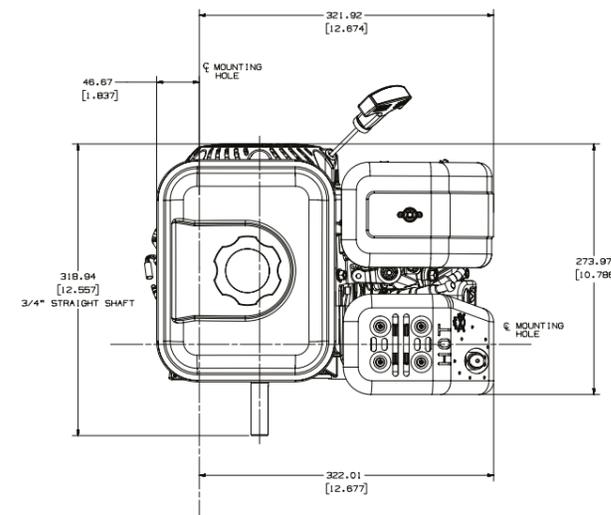

Top view


Data

Dimensions (mm)

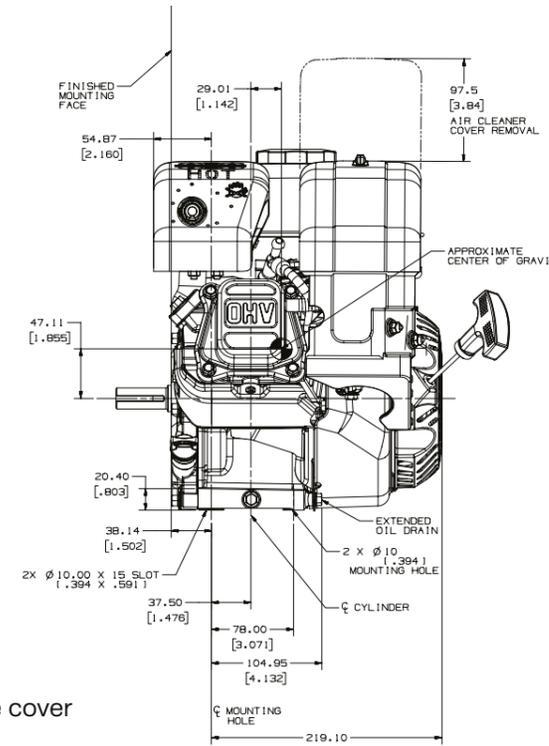

Valve cover view

Shaft variations

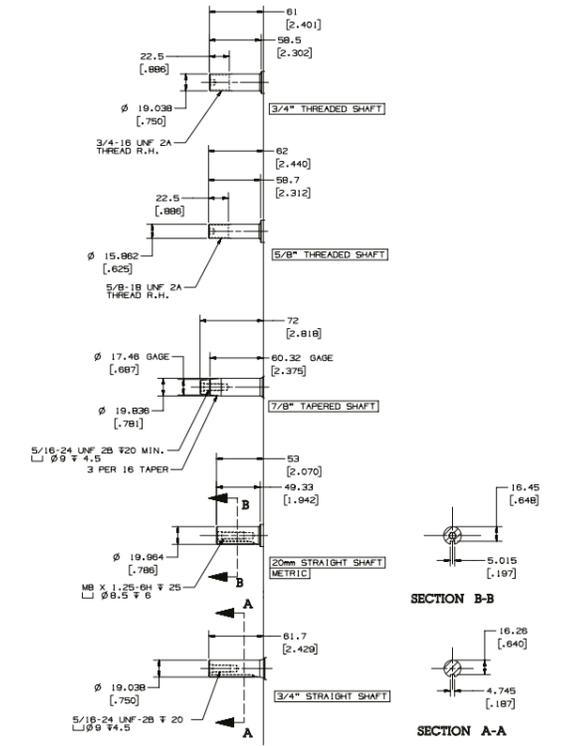


MODEL	SH270	
POWER @ 3600 rpm	Max hp (kW)	6.5 (4.8)
DISPLACEMENT	cu in (cc)	12 (196)
BORE	in (mm)	2.7 (68)
STROKE	in (mm)	2.1 (54)
PEAK TORQUE @ rpm	ft-lb (Nm)	10.2 (13.8) @ 3000
COMPRESSION RATIO		8.5:1
DRY WEIGHT	lb (kg)	35.3 (16)
OIL CAPACITY	U.S. qt (L)	0.6 (0.6)
LUBRICATION		SPLASH
DIMENSIONS= L x W x H	in (mm)	9.9 x 14.5 x 14.6 (253 x 369 x 371)


Four-cycle, single-cylinder, overhead valve, air-cooled, gasoline, horizontal shaft, aluminum head and crankcase with cast-iron cylinder liner.

*Horsepower ratings exceed Society of Automotive Engineers Small Engine Test Code J1940. Actual engine horsepower is lower and affected by, but not limited to, accessories (air cleaner, exhaust, charging, cooling, fuel pump, etc.), application, engine speed and ambient operating conditions (temperature, humidity and altitude). For more information, contact Kohler Co. Engine Engineering. Kohler reserves the right to change product specifications, designs and equipment without notice and without incurring obligation.
 †Length is recoil starter to PTO mounting face. Height is with the USA 50 state evap fuel cap.

Maximum power

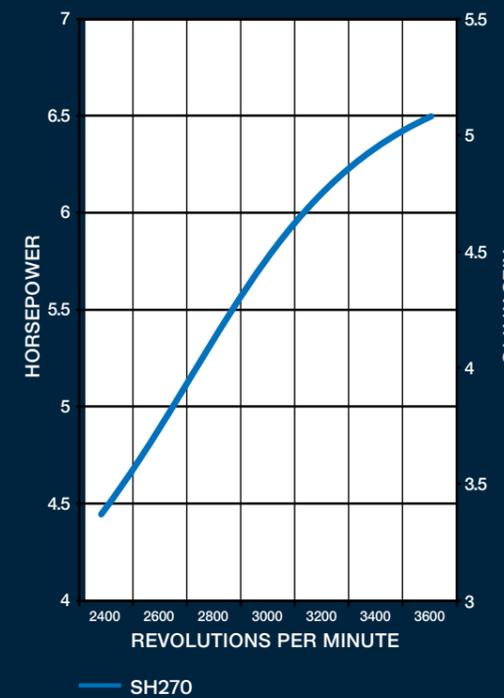

Maximum torque

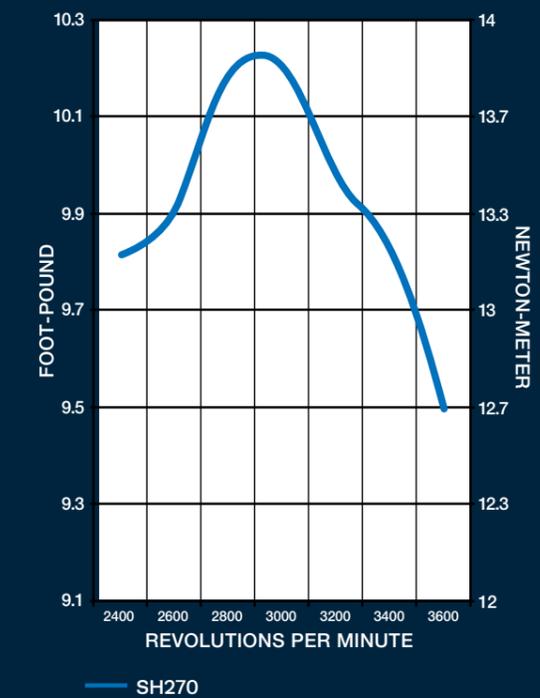



For more information, contact your Rehko source of supply.
Discovery Energy, LLC reserves the right to make modifications without prior notice.

engines.rehko.com

Printed in Italy ED0035583580 Rev.02 07/25 Eng Discovery Energy, LLC