

ALUMINUM PERSONAL WATERCRAFT TRAILERS



WAVE

- Dual bowed cradle design for a lower launch height
- 5' bunks adjustable to fit different personal watercraft
- Keel guard to protect the personal watercraft's hull
- Custom molded wiring harness with no splices
- Bearing lube grease system for long bearing life
- 4 tie down positions to properly secure different sized personal watercraft
- Sealed lights on entire trailer including LED bullet markers
- 60" tongue for best fit in watercraft class size
- Galvanized axle designed for 130" class and smaller personal watercraft

H-PACKAGE

1500 lb axle





LT SERIES

- Dual bowed cradle design for a lower launch height (single place LT's)
- Long 6' bunks for hauling larger three seater crafts
- Keel guard to protect the personal watercraft's hull
- All welded aluminum tie downs for strong and secure hauling
- Custom molded wiring harness with no splices
- Galvanized axle with bearing lube system
- Stainless steel hardware upgrade available
- Sealed LED lights on the entire trailer
- Adjustable ISA (Infinite Slide Adjust) bow stop for a proper fit of any personal watercraft on the market








Swivel wheel tongue jack.



Two per position rear mounted retractable ratchet straps. Standard equipment on the Elite and WC2-2 models.

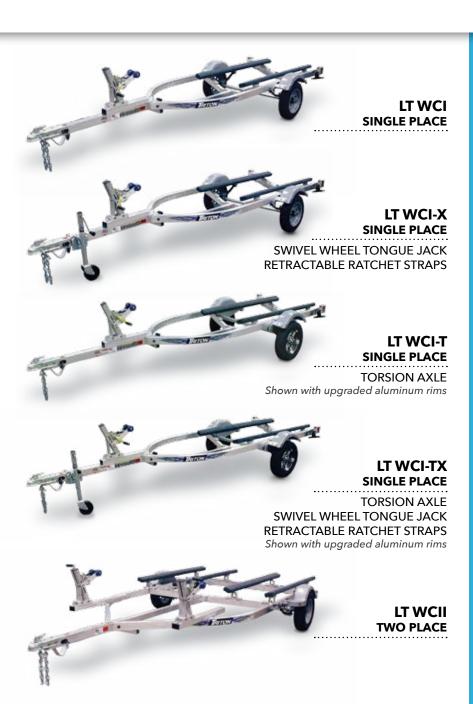

LT SERIES





ELITE SERIES

- Independent suspension from torsion axle(s) for a smooth ride and low maintenance
- Long 6' bunks for hauling large three seater personal watercrafts with ease
- Bearing lube system built-in hubs for easy maintenance and long bearing life, Reliable bearing lube system used on Elite WCIV and WC2-2
- All stainless steel hardware, great for salt water use
- Longer tongue & wider frame providing room for accessories
- Aluminum walk plank
- Keel guard to protect the personal watercraft's hull
- Adjustable ISA (Infinite Slide Adjust) bow stop for a proper fit of any personal watercraft on the market
- · Sealed LED lights on the entire trailer
- Rear retractable ratchet straps, 2 per position
- Swivel wheel tongue jack




- a. 16050 Aluminum diamond plate storage box for Elite WCII. 21"W x 10"H x 9"D
- b. 05031-1 Aluminum diamond plate storage box for Elite WCII. 15.5" Front x 34" Back x 18.5"H x 18.5"D
- c. 10690 Gas can tray
- d. 08519 Spare tire carrier (tire not included)











WC2-2

- Tandem torsion axles for additional capacity and security
- All stainless steel hardware, great for salt water use
- Tire upgrades available up to 13" tires with steel or aluminum rims (shown)
- Tough plastic molded fenders with frame supported side steps
- Adjustable ISA (Infinite Slide Adjust) bow stop for a proper fit of any personal watercraft on the market
- Aluminum walk plank
- Sealed LED lights on the entire trailer
- Rear retractable ratchet straps, 2 per position
- Swivel wheel tongue jack



Reliable bearing lube system



Shown with upgraded aluminum rims

STANDARD FEATURES

5 YEAR LIMITED WARRANTY





When registered online (non-registered trailers have a one year warranty). Other vendor warranties may apply.

Visit us online at www.tritontrailers.com for full warranty details.

	WAVE	LTWCI	LTWCI-X	LTWCI-T	LTWCI-TX	LTWCII	LTWCII-X	ELITE WOII	WC2-2	ELITE WCIV-SBD
ADJUSTABLE ISA BOW & WINCH POST WITH NON- MARRING ROLLERS TO PROPERLY FIT CRAFTS		х	х	х	х	х	х	Х	х	X (only front bow stops)
ADJUSTABLE CARPETED 6' BUNKS AND BRACKETS TO FIT ALL HULL STYLES ON THE MARKET TODAY	5' BUNKS	х	х	х	x	х	х	x	х	х
SEALED LED LIGHTS ON THE ENTIRE TRAILER		Х	Х	Х	Х	Х	Х	Х	Χ	Х
SWIVEL WHEEL TONGUE JACK			Х		Х		Х	Х	Х	Х
RETRACTABLE RATCH STRAPS (TWO STRAPS PER MACHINE)			Х		Х		Х	X	X	Х

SPECIFICATIONS

	MODEL	# OF UNITS	TIRE/RIM &	: AXLE CHOICE	GVWR	CARRYING CAPACITY	TRAILER WEIGHT	OVERALL WIDTH	OVERALL LENGTH	HITCH HEIGHT	COUPLER SIZE	AXLE TYPE	BRAKES
		1	03446 4.80 X 8C		1200	1030	170	55	145	17	2	SPRING	N/A
w	AVE		06509 4.80 X 12C										
		1	03446 4.80 X 8C		1500	1330	170	55	145	17	2	SPRING	N/A
w	/AVE-H		06509 4.80 X 12C										
1	WCI	1	06509 4.80 X 12C		1980	1785	195	59.5	183	17	2	SPRING	N/A
	WCI-X		08875 ST145/R12E 10384 ST145/R12E ALUM.		2000	1805	195	59.5	183	17	2	SPRING	N/A
2													
1	WCI-T 1	1	06509 4.80 X 12C		1980	1770	210	59.5	183	17	2	TORSION	N/A
LT	WCI-TX		08875 ST145/R12E		2000	1790	210	59.5	183	17	2	TORSION	N/A
			10384 ST145/R12E ALUM. 03392 ST175/80D13C 09942 ST175/80D13C ALUM.										
	WCII	2	08875 ST145/R12E		2500	2180	320	96	176.5	16	2	SPRING	N/A
LT'	WCII-X		10384 ST145/R12E ALUM.										
EI	ITE WCII	2	07355 20.5X10E	09942 ST175/80D13C ALUM.	2700	2335	365	101.5	189	16	2	TORSION	N/A
			03392 ST175/80D13C 08875 ST145/R12E	10384 ST145/R12E ALUM.									
			SPECIAL ORDER TRAILERS - CA										
14	C2-2	2	03392 ST175/80D13C	09942 ST175/80D13C ALUM.	2995	2445	550	102	201	16	2	TORSION	NO
**	C2-2		08875 ST145/R12E 10384 ST145/R12E ALUM.	2773	2443	330	102	201	10		TORSION	INO	
		TRITON WC2-2 WITH SURGE DISC OR DRUM BRAKES				3450	550	102	208	16	2	TORSION	YES
EI	ITE	4	03392 ST175/80D13C	09942 ST175/80D13C ALUM.	5400	4200	1200	102	343.5	16	2	TORSION	7" Surge Disc
W	CIV-SBD		08875 ST145/R12E	10384 ST145/R12E ALUM.									1 Axle Std.

Overall lengths are based on the bunks setup in the farthest position to the rear of the trailer. Hitch height is based on standard tires, upgraded tires will change loaded hitch heights. Prices and specifications may change without notice. Please note: It is the responsibility of the purchaser to adhere to the brake laws regarding trailers. For full information on the laws in your state, contact the appropriate State Motor Vehicle Department. Brake options will change the overall length of trailer. Brake option is Surge Disc Brakes on the Elite WCIV and the WC2-2 trailer. Recommended tongue weight 7-10% of GVWR.

AUTHORIZED DEALER:







Triton U.S. Patent Numbers-6,247,719 B1 6,186,580 B1 7,077,616 B2

