

Hubs with sealed dust-covers on all our machinery




**TECHNICAL DATA:**  
 Working width-raking mt. 7,50  
 Working width-spreading and turning  
 mt. 8,70  
 Weight kg. 520

RP10



Performance valid for all hay rakers of our production.

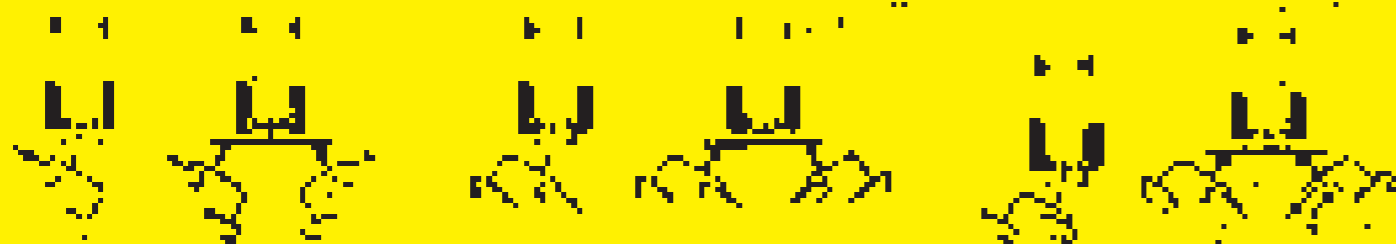

Raking

Spreading

Turning

SITREX S.p.A. reserves the right to make changes or add improvements at any time without notice. The information contained herein is general in nature and is not intended for specific application purposes.



Mounted side-delivery rake



Zona Industriale - Viale Grecia, 8  
 06018 TRESTINA (Perugia) - ITALY  
 Phone ++39 075 8540021 r.a. - Fax ++39 075 8540523  
 E-mail: sitrex@sitrex.it - http://www.sitrex.com

# Mounted side-delivery rake

Rake with very sturdy equipment. Independent and interchangeable wheels mounted on roller bearings. Left and right SPREADING - TURNING and RAKING action, also suitable for limited place.




**RP2**

TECHNICAL DATA:  
 Working width-raking 79 in. (mt. 2,00)  
 Working width-spreading and turning 79 in. (mt. 2,00)  
 Weight 145 lbs (66 kg.)




**RP4**

TECHNICAL DATA:  
 Working width-raking 103 in. (mt. 2,60)  
 Working width-spreading and turning 114 in. (mt. 2,90)  
 Weight 396 lbs (180 kg.)



**RP5**

TECHNICAL DATA:  
 Working width-raking 138 in. (mt. 3,50)  
 Working width-spreading and turning 154 in. (mt. 3,90)  
 Weight 440 lbs (200 kg.)



Wheel diameter 55 in. (mt. 1,4)  
 Teeth number each wheel 40  
 Teeth diameter 0,28 in. (mm. 7)



**RP8**

TECHNICAL DATA:  
 Working width-raking 217 in. (mt. 5,50)  
 Working width-spreading and turning 240 in. (mt. 6,10)  
 Weight 1.013 lbs (460 kg.)

