



PROGRAM 2021/2022



FERRI[®]

SIMPLY. THE MOWER

WORLD LEADER IN MOWER TECHNOLOGY

www.ferri-america.com

LEGENDA

Features:



standard



option



Totality
Independent
Hydraulics



Floating
Head
Systems



Reversible
Rotor




Mechanical
Breakaway



Hydraulic
Breakaway
with auto-return
system



Arm
Power
Slew



Cable
Controls



Electric
Controls



Oil Cooler
with
Thermostat




Lift Float
Kit



Roll-over
protection
system



Rear
Adjustable
Roller




Front
Adjustable
Guard



PTO Shaft



Tractor
Stabilizers



Direct Drive
Motor "High
Performance"




Cast Iron
Worm
Gearbox



Prepared
beforehand
to work in
the rear position



Oil



Left and
right work

INDEX





BOOM MOWERS

- 4 **T350S**
- 5 **T350SI**
- 6 **T250A - T320A**
- 7 **T380D - T430D** Smart
- 8 **T460** Smart
- 9 **TM** Farm
- 10 **TP** Farm
- 11 **TXV** Vision Energy

MOWERS

- 12 **MT**
- 13 **MKD** *Front and rear mower*

OFFSET / IN-LINE SLOPE MOWERS

- 14 **ZME** *Central and offset mower*
- 15 **ZMGE** *Central and offset mower*
- 16  **ZMTE PRO** *Central and offset mower*
- 17 **ZTE** *Central and offset mower*
- 18  **ZLE PRO** *Central and offset mower*
- 19 **ZHE** *Central and offset mower*

HYDRAULIC FLAIL HEADS FOR MINI-LOADERS



- 20 **TSKID**

ATTACHMENTS

- 21 **Implements**
- 22 **Controls**
- 23 **Hydraulic Flail heads**
- 23 **Professional Flail heads**

BOOM MOWERS
with hedges cutterbar
for green area light green
maintenance

T350S

T350S  15 to 50 HP/1543 lbs  11' 10"





Left hand operation


T350S



BOOM MOWERS with hedges cutterbar for green area light green maintenance

T350SI

T350SI  25 to 50 HP/1984 lbs  11' 10"



Left hand operation

T350S



Legenda: see 2

Features:



standard



option

BOOM MOWERS

for agriculture and light green maintenance

T250A

T320A



T250A



20 to 35 HP/1543 lbs



8'3"

T320A



25 to 40 HP/1984 lbs



10'7"

T320A/R



25 to 40 HP/1984 lbs



10'7"



T320 A/R

Suitable for tractors with reversible drive.



BOOM MOWERS

for agriculture and light green maintenance

T380D

SMART

T430D

SMART



T380D Smart

T430D Smart

T430DR Smart



40 to 60 HP/3747 lbs



50 to 70 HP/4409 lbs



50 to 70 HP/4409 lbs



12' 7"



14' 2"



14' 2"



ELECTRA
FULL



Legenda: see 2

Features:

 standard

 option

7

BOOM MOWERS

for agriculture and green areas

T460

SMART



T460 Smart

50 to 70 HP/4850 lbs 15' 1"



BOOM MOWERS

for agriculture and green areas



TM 46 FARM

50 to 70 HP/5512 lbs 15'3"



Legenda: see 2

Features:







standard



option

BOOM MOWERS for grounds maintenance



TP 510  60 to 80 HP/6614 lbs  15' 9"
TP 610  70 to 90 HP/7050 lbs  19' 5"




PROFESSIONAL BOOM MOWERS for municipal grounds maintenance



TXV 50 80 to 100 HP/7500 lbs 17' 2"
TXV 60 90 to 110 HP/8000 lbs 20' 6"



Good View on Flail Head











Legenda: see 2 **Features:** standard option

MOWERS

for agriculture and green areas



*For grass
and twigs*

MT 140		30 to 45 HP		4'7"
MT 160		35 to 50 HP		5'3"
MT 180		45 to 60 HP		5'10"
MT 200		50 to 70 HP		6'6"



FRONT AND REAR MOWERS

for agriculture and green areas



For grass and twigs

MKD 2300 75 to 130 HP 7' 6"
MKD 2500 85 to 130 HP 8' 2"
MKD 2800 95 to 130 HP 8' 11"



Max. modularity. Revolving upper 3 point linkage for front and rear mounting.



Legenda: see 2

Features:



standard









option

OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas




ZME 125  18 to 30 HP/1555 lbs  4' 1"  5' 9"

ZME 155  25 to 40 HP/2000 lbs  5' 1"  6' 8"



**For compact
tractors**



Mechanical
breakaway.






Rotor with internal
sealed bearings




OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas



ZMGE 1400  40 to 70 HP/3527 lbs  4' 8"  8' 6"

ZMGE 1600  40 to 70 HP/3748 lbs  5' 4"  9' 2"



Gearbox unit
outside the
transmission
cover (more
offset and less
PTO angle)

Extra Reach




Legenda: see 2 **Features:**  standard  option

OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas



ZMTE PRO 1600	60 to 80 HP/5291 lbs	5' 5"	9' 2"
ZMTE PRO 1800	60 to 80 HP/5291 lbs	6' 1/2"	9' 10"
ZMTE PRO 2000	70 to 80 HP/5732 lbs	6' 8"	10' 6"



Gearbox unit outside the transmission cover (more-side sliding)

Extra Reach



Mechanical block pin for transport (no chains or holders).




OFFSET/IN-LINE SLOPE MOWERS


for agriculture and green areas



ZTE 2300 70 to 80 HP/6170 lbs 7'5" 10'9"



Hydraulic block tap side movements for transport with manual activation (no chains or holders).



Hydraulic block tap of flail head during transport (no chains or holders).



Gearbox unit outside the transmission cover (more-side sliding)


Legenda: see 2 **Features:** standard option

PROFESSIONAL OFFSET/IN-LINE SLOPE MOWERS

for municipal and green areas




ZLE PRO 1800		60 to 120 HP/6173 lbs		6'0"		9'11"
ZLE PRO 2000		70 to 120 HP/6620 lbs		6'8"		10'6"
ZLE PRO 2300		80 to 120 HP/7050 lbs		7'6"		11'4"



Extra Reach



Gearbox unit outside the transmission for more homogeneous mulching.



Double skin mulching frame with inter-anal "Full Coverage" layer in Strenx 700


STRENX™
PERFORMANCE STEEL

OFFSET/IN-LINE SLOPE MOWERS

for professionals and green areas



ZHE 2500 100 to 160 HP/8818 lbs 8'2" 12'0"



Extra Reach



Gearbox unit outside
the transmission cover
(more-side sliding)



Hydraulic block valve for
transport with automatic
(no chains or holders).



Hydraulic block tap for
transport with manual activation
(no chains or holders).



Mechanical Breakaway
with spring assisted
device

Legenda: see 2

Features:



standard



option

FLAIL HEADS for mini-loaders

TSKID



TSKID 1800
TSKID 2000



55 to 100 HP



71"



55 to 100 HP




79"



INTERCHANGEABLE IMPLEMENTS

For hydraulic Boom Mowers

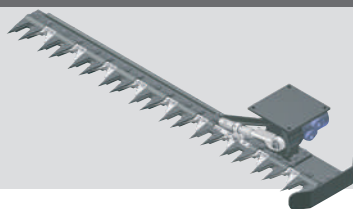

**CUTTER BAR
CS 150**
Max CUT 1/2".
Width of cut: 59"



CUTTER BAR CSP 150
Max CUT 1/2".
Width of cut: 59"



**CUTTER BAR TR 13
TR 22**
Max CUT 3 1/4".
Width of cut:
51" (TR 13).
87" (TR 22).



**DITCH CLEANER
FF45 - FF60**
For the maintenance of
ditches.
Width 18" & 24".

CONTROLS



Classic

Cable controls. Reliability and simply use (standard).



Electra Full

Monolever electric control with rotor's electric switch.



Simple Proportional Tronic

Proportional electric control with 3 proportional functions, electric starter of the hedgetrimmer, emergency stop and automatic control of the inclination of the hedgetrimmer bar by means of a button on the joystick.



Comfort

Electro-hydraulic proportional controls. The 2 hydraulic distributors are controlled and operated by a mixed system. The Joystick runs the hydraulic low pressure proportional movements of the first and second arm.



Proportional electrical control with electric rotor management.

The EP Tronic control allows for easy portability of the cab control thanks to a light joystick and the lack of hydraulic hoses.

HYDRAULIC FLAIL HEADS

PROFESSIONAL HYDRAULIC FLAIL HEADS

TME 60



24"



154 lbs

T250A

TME 80



31"



176 lbs

T320A



TID 100



39"



284 lbs

T380D
SMART

T430D
SMART

T460
SMART



TI 120



47"



463 lbs

TM
FARM

TP
FARM



TN 120 PROFESSIONAL



47"



628 lbs


TXV



World Leader In Mower Technology



FERRI®
Company

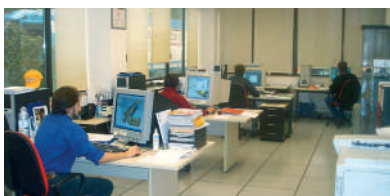

FERRI®
Engineering



FERRI®
Manufacturing



FERRI®
Genuine
Spare Parts

All data subject to change

Program 2021-2022 - 02/22

campbelladv.com 35121



FERRI®



FERRI srl - Via C.Govoni, 30 - 44034 Tamara (FE) Italy
Tel. 011-39-0532.866866 - Fax 011-39-0532.866851
www.ferrisrl.it - info@ferrisrl.it

North America Sales and Marketing Manager/FERRI

Ronald E. Roglis
Glenarm, Illinois 62536
Cell (314) 422-9460
Fax (217) 483-4123
ron.roglis@gmail.com

Parts Stock / FERRI:

J.S. Woodhouse Co., Inc.
1314 Union Street
P.O. Box 1169
West Springfield, Ma. 01090 U.S.A.
tel. 413-736-5462
fax 413-732-3786
info@jswoodhouse.com

Dealer: