



PROGRAM 2023/2024



FERRI[®]

SIMPLY. THE MOWER

WORLD LEADER IN MOWER TECHNOLOGY

www.ferri-america.com

LEGENDA

Features:

 standard

 option



Totality
Independent
Hydraulics



Floating
Head
Systems



Reversible
Rotor




Mechanical
Breakaway



Hydraulic
Breakaway
with auto-return
system



Arm
Power
Slew



Cable
Controls



Electric
Controls



Oil Cooler
with
Thermostat




Lift Float
Kit



Roll-over
protection
system




Rear
Adjustable
Roller




Front
Adjustable
Guard



PTO Shaft



Tractor
Stabilizers



Direct Drive
Motor "High
Performance"




Cast Iron
Worm
Gearbox



Prepared
beforehand
to work in
the rear position



Oil



Left and
right work

BOOM MOWERS

- 4 T350S
- 5 T350SI
- 6 T250A - T320A
- 7 T380D - T430D
- 8 T460
- 9 TM
- 10  TP
- 11  TST
- 12  TXV *Vision Energy*

MOWERS

- 13 MT
- 14 MKD *Front and rear mower*

OFFSET / IN-LINE SLOPE MOWERS

- 15 ZME *Central and offset mower*
- 16 ZMGE *Central and offset mower*
- 17 ZMTE PRO *Central and offset mower*
- 18 ZLE PRO *Central and offset mower*
- 19 ZHE *Central and offset mower*

IDRAULIC FLAIL HEADS FOR MINI-LOADERS

- 20 TSKID

ATTACHMENTS

- 21 *Implements*
- 22 *Controls*
- 23 *Hydraulic Flail heads*
- 23 *Professional Flail heads*

BOOM MOWERS *with hedges cutterbar* *for green area light green* *maintenance*

T350S

T350S  15 to 50 HP/1543 lbs  11' 10"



Left hand operation



BOOM MOWERS *with hedges cutterbar* *for green area light green* *maintenance*

T350SI

T350SI  25 to 50 HP/1984 lbs  11' 10"



SP TRONIC



LEFT RIGHT



Left hand operation



Legenda: see 2

Features:



standard



option

BOOM MOWERS for agriculture and light green maintenance

T250A

T320A



T250A



20 to 35 HP/1543 lbs



8' 3"

T320A



25 to 40 HP/1984 lbs



10' 7"

T320A/R



25 to 40 HP/1984 lbs



10' 7"



ELECTRA
FULL

ELECTRA
FULL



Suitable for tractors with reversible drive.



BOOM MOWERS

for agriculture and light green maintenance

T380D

T430D



T380D		40 to 60 HP/3747 lbs		12' 7"
T430D		50 to 70 HP/4409 lbs		14' 2"
T430DR		50 to 70 HP/4409 lbs		14' 2"



BOOM MOWERS

for agriculture and green areas

T460



T460

 50 to 70 HP/4850 lbs  15' 1"



BOOM MOWERS

for agriculture and green areas



TM46

50 to 70 HP/5512 lbs 15' 3"



BOOM MOWERS

for grounds maintenance

TP



TP490  60 to 80 HP/6614 lbs  15' 9"

TP600  70 to 90 HP/7050 lbs  19' 5"



EG
TRONIC



BOOM MOWERS

for agriculture and green areas



TST50

90 to 110 HP/7055 lbs 6' 9"



DS
TRONIC



Legenda: see 2

Features:



standard



option


PROFESSIONAL BOOM MOWERS for municipal grounds maintenance



TXV 50 80 to 100 HP/7500 lbs 17' 2"
TXV 60 90 to 110 HP/8000 lbs 20' 6"



Good View on Flail Head



MOWERS

for agriculture and green areas

MT

**For grass
and twigs**

MT 140		30 to 45 HP		4' 7"
MT 160		35 to 50 HP		5' 3"
MT 180		40 to 60 HP		5' 10"
MT 200		50 to 70 HP		6' 6"



FRONT AND REAR MOWERS for agriculture and green areas



MKD 2300  75 to 130 HP  7' 6"
MKD 2500  85 to 130 HP  8' 2"
MKD 2800  95 to 130 HP  8' 11"

For grass and twigs



Revolving upper three point linkage for front and rear mounting.



OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas




ZME 125  18 to 30 HP/1555 lbs  4' 1"  5' 9"

ZME 155  25 to 40 HP/2000 lbs  5' 1"  6' 8"



**For compact
tractors**



Mechanical
breakaway.



Rotor with internal
sealed bearings




OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas



ZMGE 1400  40 to 70 HP/3527 lbs  4' 8"  8' 6"

ZMGE 1600  40 to 70 HP/3748 lbs  5' 4"  9' 2"



**Gearbox unit
outside the
transmission
cover (more
offset and less
PTO angle)**




OFFSET/IN-LINE SLOPE MOWERS

for agriculture and green areas



ZMTE PRO 1600		60 to 80 HP/5291 lbs		5' 5"		9' 2"
ZMTE PRO 1800		60 to 80 HP/5291 lbs		6' 1/2"		9' 10"
ZMTE PRO 2000		70 to 80 HP/5732 lbs		6' 8"		10' 6"



Gearbox unit outside the transmission cover (more-side sliding).



Mechanical block pin for transport (no chains or holders).




PROFESSIONAL OFFSET/IN-LINE SLOPE MOWERS


for municipal and green areas



ZLE PRO 1800		60 to 120 HP/6173 lbs		6' 0"		9' 11"
ZLE PRO 2000		70 to 120 HP/6620 lbs		6' 8"		10' 6"
ZLE PRO 2300		80 to 120 HP/7050 lbs		7' 6"		11' 4"



Gearbox unit outside the transmission for more homogeneous mulching.

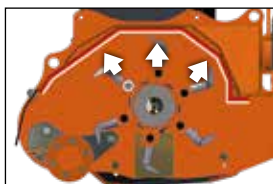

Double skin mulching frame with inter-annual "Full Coverage" layer in Strenx 700




STRENX™
PERFORMANCE STEEL

OFFSET/IN-LINE SLOPE MOWERS

for professionals and green areas



ZHE 2500  100 to 160 HP/8818 lbs  8' 2"  12' 0"



Hydraulic block valve for transport with automatic (no chains or holders).



Hydraulic block tap for transport with manual activation (no chains or holders).




Gearbox unit outside the transmission cover (more-side sliding)



Mechanical Breakaway with spring assisted device

FLAIL HEADS for mini-loaders

TSKID



TSKID 1800
TSKID 2000



55 to 100 HP



71"




55 to 110 HP



79"




PTO
SHAFT

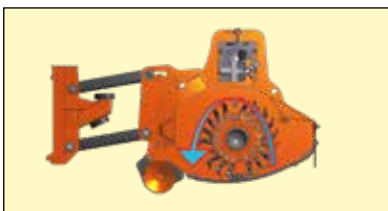

INTERCHANGEABLE IMPLEMENTS

For hydraulic Boom Mowers

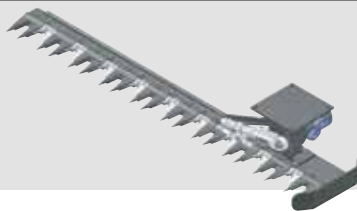

CUTTER BAR CS 150

Max CUT 1 1/2".
Width of cut: 59"



CUTTER BAR CSP 150

Max CUT 1 1/2".
Width of cut: 59"



CUTTER BAR TR 13 - TR 22

Max CUT 3 1/4".
Width of cut:
51" (TR 13).
87" (TR 22).



DITCH CLEANER FF45 - FF60

For the maintenance of
ditches.
Width 18" & 24".



CONTROLS



classic 

Classic

Cable controls. Reliability and simply use (standard).



electra 

Electra Full

Monolever electric control with rotor's electric switch.



SP-Tronic 

Simple Proportional Tronic

Proportional electric control with 3 proportional functions, electric starter of the hedgetrimmer, emergency stop and automatic control of the inclination of the hedgetrimmer bar by means of a button on the joystick.



EG-Tronic 

Four function proportional electric control with CAN - Bus technology

Proportional electric control with electric rotor management, the EG Tronic control allows for easy portability in the cab thanks to a light joystick and the lack of hydraulic hoses.



DS-Tronic 

Double-speed electric control

The DS-Tronic Dual control: allows easy portability of the control in the cab thanks to a lightweight joystick and the absence of hydraulic hoses.



SC-Tronic 

Two-section Load - Sensing proportional electrical control With CAN - Bus technology

The SC (Speed Criteria) Dual control gives the operator the ability to select different operating modes depending on the type of work needed. The joystick controls the proportional function of the first and second arms.

HYDRAULIC FLAIL HEADS

PROFESSIONAL HYDRAULIC FLAIL HEADS

TME 60



24"



154 lbs

T250A

TME 80



31"



176 lbs

T320A



TID 100



39"



284 lbs

T380D

T430D

T460



TI 120



47"



463 lbs

TM

TP



TNI 125



49"



573 lbs



World Leader In Mower Technology



FERRI®
Company



FERRI®
Engineering



FERRI®
Manufacturing



FERRI®
Genuine
Spare Parts



FERRI®



FERRI srl - Via Govoni, 30 - 44034 Tamara (FE) Italy
Tel. 011 39 0532 866866 - Fax 011 39 0532 866851
info@ferrisrl.it - www.ferrisrl.it

**North America Sales and
Marketing Manager/FERRI**
Ronald E. Roglis
Glenarm, Illinois 62536
Cell (314) 422-9460
Fax (217) 483-4123
E-mail: ron.roglis@gmail.com

Parts Stock / FERRI:
J.S. Woodhouse Co., Inc.
1314 Union Street
P.O. Box 1169
West Springfield, Ma. 01090 U.S.A.
tel. 413-736-5462
fax 413-732-3786
info@jswoodhouse.com