bühler

farm king



7" & 8" x 36', 41', 46' 8" x 51', 56' & 10" x 36', 41' & 51' Conventional Augers

Operator's and Parts Manual FK335



TABLE OF CONTENTS

| DESCRIPTION | PAGE NUMBE |
|--|------------------|
| Warranty Safety Instructions Safety Signs Operating Instructions Maintenance and Lubrication Storage Assembly Instructions | |
| Tube Assembly Parts List | |
| Winch (No. 1550) Drawing Winch (No. 1550) Parts List Winch (No. K2550) Drawing Winch (No. K2550) Parts List | 41 42 |
| PTO Assembly Drawing | arts List 45 |
| Shipping Bundles | 54 |



WARRANTY POLICY

Buhler Manufacturing products are warranted for a period of twelve (12) months (90 days for commercial application) from original date of purchase, by original purchaser, to be free from defects in material and workmanship under correct, normal agricultural use and proper applications.

Buhler Manufacturing's obligations under this warranty shall be limited to the repair or exchange, at Buhler Manufacturing's option, of any Buhler Manufacturing product or part which proves to be defective as provided. Buhler Manufacturing reserves the right to either inspect the product at the buyer's location or have it returned to the factory for inspection.

The above warranty does not extend to goods damaged or subject to accident, abuse or misuse after shipment from Buhler Manufacturing's factory, nor to goods altered or repaired by anyone other than an authorized Buhler Manufacturing representative.

Buhler Manufacturing makes no Express Warranties other than those, which are specifically described. Any description of goods, including any references and specifications in catalogues, circulars and other written material published, is for the sole purpose of identifying goods and shall conform to such descriptions. Any sample or model is for illustrative purposes only and does not create an Express Warranty that the goods conform to sample or model shown.

The purchaser is solely responsible for determining suitability of goods sold. This warranty is expressly in lieu of all other warranties expressed or implied. Buhler Manufacturing will in no event be liable for any incidental or consequential damages whatsoever. Nor for any sum in excess of the price received for the goods for which liability is claimed.

WARRANTY CLAIMS:

Warranty requests must be prepared on Buhler Manufacturing Warranty Claim Forms with all requested information properly completed. Warranty Claims must be submitted within a thirty (30) day period from date of failure repair.

WARRANTY LABOR:

Any labor subject to warranty **must** be authorized by Buhler Manufacturing. The labor rate for replacing defective parts, where applicable, will be credited at 100% of the dealer's posted shop rate. Defective parts will receive an extra 10% discount to assist with freight or other incidental costs.

GOVERNMENT LEGISLATION:

Warranty terms and conditions are subject to Provincial or State legislation.

IMPORTANT FACTS:

Buckets and Bucket Tines Carry No Warranty Bent Spears Carry No Warranty Snowblower Fan Shafts Carry No Warranty Mower Blades Carry No Warranty Portable Auger Parts Have Two (2) Year Warranty Loader Parts Have Two (2) Year Warranty

IMPORTANT NOTE: This warranty does not apply to rentals



SAFETY INSTRUCTIONS

The safety of the operator of any piece of equipment is of prime importance to the manufacturer and the following precautions should be taken when operating, starting or doing any maintenance work on this auger.

Always transport the auger in the down position carrying the weight of the auger on the winch cable and not on the transport stops.

When moving the auger on a road use red flag, or at night, if absolutely necessary, accessory lights for adequate warning to operators of other vehicles.

The auger must be on a level surface and the wheels free to move when raising or lowering. Everyone should be kept clear during these operations.

Never stand under the auger while raising or lowering.

When filling tall bins, tanks or granaries, it is advisable to anchor the auger to the bin or building to prevent it from being tipped over by the wind or a sudden movement. The upper end of auger should rest on some support when in operation.

Keep hands, feet and clothing away from exposed flighting and all moving parts. Do not allow children or anyone other than the operator close to the auger when in operation.

Before attempting to service, adjust or unclog an auger, disengage drive and shut off engine. In the case of an electric motor, shut off switch and unplug the connection.

Never operate an auger with the tail end off the ground.

When storing, the tail should be tied or weighted to prevent children or others from tipping the auger. The power source should be fixed in such a way that no one except an authorized person could start the unit.

Never raise the tail of an auger above waist high as the balance shifts forward and the auger will tip over.

Check to see that the set screws holding the PTO shaft on the gearbox shaft are firmly tightened every time you are preparing to use the auger.





CAUTION

- 1. Read and understand the operator's manual before operating.
- 2. Keep all safety shields and devices in place.
- 3. Make certain everyone is clear before operating or moving machine.
- 4. Keep hands, feet and clothing away from moving parts.
- 5. Shut off power to adjust, service or clean.
- 6. Support discharge end or anchor intake end to prevent upending.
- 7. Disconnect power before resetting motor overload.
- 8. Empty auger before moving, to prevent upending.
- 9. Lower auger to transport position for transporting.
- 10. Make certain electric motors are grounded.



SAFETY SIGNS



REPLACE SAFETY SIGNS
IMMEDIATELY SHOULD THEY
BECOME DAMAGED, TORN OR
ILLEGIBLE. OBTAIN
REPLACEMENTS FROM YOUR
AUTHORIZED DEALER USING
THE PART NUMBERS SHOWN.

1. SAFETY SIGN - PART #961016



- Do not operate the unit before reading and understanding the Operator's Manual.
- 2. Keep all safety devices in place.
- 3. Keep off of the equipment at all times.
- 4. Keep hands, feet, and clothing away from moving parts while in operation.
- Make certain everyone is clear of the equipment before applying power or moving the machine.
- Do not adjust, service, lubricate, clean, unclog, or move the mechanism until all power is shut off.
- While in operation, always support the discharge end or provide adequate anchorage of the intake end to prevent sudden tipping.
- 8. Disconnect power of electrical driven units before resetting motor over loads.
- To avoid tipping, make sure auger is empty before attempting to move.
- 10. Keep wheels of undercarriage level and on firm ground.
- 11. Lower unit to the recommended transport position before transporting.
- 12. Do not operate electric motor equipped units until they are properly grounded.
- Keep children, visitors, and all untrained personnel away from machine while in operation.
- 14. Lower auger when moving close to overhead power lines.



OPERATING INSTRUCTIONS

All augers may be elevated up to 45°: however, for best operating efficiency, 35° should not be exceeded. At angles over 35° the capacity and life of the auger decreases.

Never operate an empty auger for over one minute, as the flighting and housing will experience excessive wear.

To position the auger, always tow or move the auger in the down position to a point as close as possible to the bin or barn.

CAUTION: Always keep the wheels level. Raise the auger to the desired height and back the auger into position. Rest the head on some support. As an auger is emptied the head becomes heavy, the tail becomes light, and the auger could tip.

CAUTION: Never place blocks under the wheels to increase the elevation of the auger.

Be sure the wheels are free to move and no one is standing close to the auger when raising or lowering. Never attempt to raise or lower the auger while it is in operation.

The auger is equipped with a safety brake winch. The auger may be raised or lowered by simply turning the winch handle in the proper direction until the desired discharge height is obtained.

Never have less than three wraps of cable on the drum of the winch.

NOTE: Arrow on winch shows proper direction of rotation. Improper rotation may cause winch brake failure.

CAUTION: All wiring should be done by a competent electrical contractor to assure the electric motor is receiving the correct voltage and the cable will carry the correct load.

The life of a motor is greatly reduced if it is run at too high or too low voltage. Also, a motor cannot develop full power if the cable is too small. The electrical supply to each motor should include an enclosed safety switch or circuit breaker of the correct size to protect the motor from being overloaded. The switch should be under a padlock to prevent the motor from being turned on by accident while working on or moving the auger. This will also prevent unauthorized persons or children from operating the motor. A magnetic starter should be used to shut off the motor in case of low voltage, loss of power, or overloading the motor.

The electric motor must then be started manually.

Power take-off drives are designed for tractors with 540 RPM power take off and should not be run by tractors with 1000 RPM power take-off.



OPERATING INSTRUCTIONS – cont'd.

CAUTION: Always check to see that both ends of the PTO shaft are securely attached before using any PTO drive auger. This should always be done with the tractor shut off.

To assure a long life from a PTO tumbler shaft, operate the shaft at the least angle possible and always keep the tractor axle parallel to the side of the auger housing.

CAUTION: Always maintain at least a 6" lap on the tumble shields. Be sure they turn freely and make certain everyone stands clear of the tractor, tumbler shaft, and auger before engaging power take-off. Be sure ends are securely connected to the auger and tractor.

Before engaging power take-off, start tractor and idle engine. Engage power take-off slowly and bring PTO RPM up to recommended speed of 500 RPM.

Before stopping auger (except in an emergency) let all grain empty out of the auger, idle engine then disengage power take-off. Shut off tractor.

NOTE: When operating an auger for the first time when new or at the beginning of a season, run only partially full until flighting becomes polished. It is always a good idea to check the flighting for freedom of movement by turning pulley or tumbler shaft by hand before connecting to a power source. Other items to check are the head (spout) and intake cage for bird nests or other obstructions before starting the auger.

IMPORTANT: Always lower auger before transporting and allow the weight of the auger to rest on the winch cable and not on the transport stops.



CAUTION: When towing the auger, never exceed 32 kilometers per hour.

Always use a flag, or at night, a signal light when towing an auger on a road. Check your local regulations for further safety devices in this regard.



MAINTENANCE AND LUBRICATION

Check condition of winch cable occasionally and replace if it shows wear. The wear will occur on the first few wraps around the drum of the winch.

The main thing to check on the cable is for broken strands or rust, which penetrates the cable core. This is particularly important if the auger is more than a few years old.

Lubricate the PTO tumbler shaft universal joints every five hours. Grease the PTO shear yoke before using PTO for the first time.

Oil the moving parts of the winch two times per year.

Check the oil level of the gearbox one time per year and maintain the level at ½ full. Use SAE90.

The plastic chain guard at the top of the auger must be removed to inspect or replace the chain and sprockets. When replacing the plastic guard, clean off the residue from the old silicone and apply a fresh bead using a caulking gun. There must be about 2 pounds of grease in the guard. The bolts should be tightened in a criss-cross sequence to ensure proper seating of the guard. The bolts are a ½" grade 5 which should be torqued to about 9 foot pounds using a torque wrench.

After every 40 hours of use, add approximately 10 squirts of grease to chain cover at the top of the auger.

NOTE: When replacing bearings or tightening a loose bearing collar, always tighten collar in the <u>direction of shaft rotation</u> using a center punch or a similar tool.

If the auger is towed extensively, the wheel bearings should be repacked at least semiannually.

STORAGE

The auger should be stored in a dry place if possible. If stored outside, lower auger to its lowest position and tie the tail end down so that no one can accidentally overturn it.

Clean auger thoroughly as dirt draws moisture and causes metal to rust. If the auger has been used to move fertilizer, clean thoroughly and apply oil or grease on entire flighting and inside the housing to stop and prevent further corrosion.

Remove belts and store in a cool dry place if auger is to be left outdoors.

At this time check all moving parts for wear and order replacement parts from your nearest dealer.

When taking the auger out of storage, clean it thoroughly and check for obstructions at the inlet and outlet ends. Check the oil in the gearbox.


Check all bolts and set screws.



ASSEMBLY INSTRUCTIONS

- 1. Pages 14-18: Assemble the bottom section (#1) to the top section (#2) making sure the flighting is aligned and locked with a hex bolt and lock nut. (7" & 8" 3/8 " x 2" grade 8, 10" ½" x 2 ¾" grade 8). **10" Augers only**: The drive lines for the two sections are connected using a 1 5/16" sq. x 5 ½" coupler (#59). Use hex bolts, lock washers and hex nuts to fasten the auger rings together (7" & 8" 3/8" x 1", 10" ½" x 1 ¼"). Align the two sections before tightening the bolts. Be sure to tighten bolts evenly first one side and then the other. Bolt the intake guard (#11) to the bottom of the auger using 3/8" x 2" hex bolts, lock washers and hex nuts.
- 2. Pages 14-18: **7" & 8" Augers:** The gearbox is shipped without oil. Before you mount the gearbox on the auger, remove the top plug and fill with about 500 ml of SAE80-90 oil. The gearbox may be used on either the left or the right side. Connect the gearbox to the drive line with a coupler (#25) using a ¼" x ¼" x 3 ½" key and 3/8" x 3/8" socket set screws. Bolt the gearbox to the mounting plate on the tube using 3/8" x 3/4" hex bolts and lock washers.

NOTE: The pinion shaft of the gearbox should protrude into the 4" coupler at least 1 3/4" as shown in diagram.

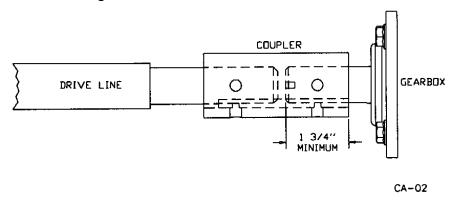

Bolt the gearbox plate (#20) to the top of the gearbox with the ring on the drive side. The extension shield holder (#19) bolts on top of the plate with the welded bolt turned towards the top of the auger. Use the same hardware as for the gearbox.

10" AUGERS: The gearbox is shipped without oil. Before you mount the gearbox on the auger, remove the lid and fill the gearbox about 1/3 full with SAE80-90 oil (oil should just be touching the bottom of the gears, do not overfill).

Use gasket glue when replacing the cover to reduce the chance of leaks. The gearbox may be used on either the left or the right side. Check to see that the breather plug on the gearbox lid will be on the top and the drain plug will be at the bottom when the gearbox is bolted to the auger. Connect the gearbox to the splined coupler on the drive line and bolt on the gearbox using ½" x 1" hex bolts and lock washers. Bolt the gearbox plate (#20) to the top of the gearbox with the ring on the drive side. The extension shield holder (#19) bolts on top of the plate with the welded bolt turned towards the top of the auger. Use the same hardware as for the gearbox.



- 3. Pages 14-18: Mount the drive line shields (#6) starting at the top of the auger before you lift the auger. The final extension shield (#5) will be mounted after the auger is assembled. Bolt the extension shield to the shield holder (#19) using a 5/16" flat washer, lock washer and hex nut.
- 4. Pages 32 & 33: Bridging should be assembled on the main auger tubes before raising the auger.
 - 7" x 6', & 8" x 46' & 51' Bolt the bridging bracket (#4) to the welded bracket on the pipe ring using 3/8" x 1 1/4" hex bolts, lock washers and hex nuts. Attach the cross brace (#5) to the top of the yoke using the same size hardware. The tie rods (#8) are fitted through the sleeves welded to the yoke and through the sleeves welded to the sides of the auger tube. Attach cross brace (#21) to the top of the bridging yoke using 3/8" x 1 1/4" hex bolts, lock washers and hex nuts. Tension the tie rod using the hex nuts at each end.
 - **8" x 56'** Bolt the bridging bracket (#19) to the bracket at the top of the extension auger using $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " hex bolts, lock washers and hex nuts. Mount the two cables (#17). Bolt the cable yokes (#20) to the bottom of each cable using $\frac{1}{2}$ " x 2" hex bolts, lock washers and hex nuts. Bolt the yokes to the cable brackets welded to the main tubing with the same hardware. The cables are fastened to the bridging yoke using 3/8" cable clamps and 10 ga., 3/8" I.D. flat washers. Do not tighten these clamps until the cable has been tensioned using a $\frac{1}{2}$ " hex nut on the threaded end at the top of the cable. The main tubes must be straight or bowed up slightly before lifting auger. Any downward bow will result in very loud flighting noise.
 - **10" x 51'** Assemble bridging yoke (#23), cross brace (#24) and cables (#22) to the auger tubes. Use the same assembly procedure as described in the 8" x 56' section on cable assembly. The same size hardware is used.
- 5. Pages 19-22: Mount the two undercarriage arms (#1) and (#2) to the pivot pin under the welded gearbox mount using 1 ½" washers (#8) and 5/16" x 2 ¼" cotter pins (#9).
 - Bolt the undercarriage arms to the axle (#5) using hex bolts, lock washers and hex nuts. (7" & 8" $\frac{1}{2}$ " x 3 $\frac{1}{4}$ ", 10" 5/8" x 3 $\frac{1}{2}$ "). Slide the track roller assembly (#45) onto the track with the large roller turned to the bottom of the auger. Bolt the lift arm extension (#7) to the track roller using $\frac{1}{2}$ " x 4 $\frac{1}{2}$ " bolts and lock nuts for the 7" and 8" and 5/8" x 6" bolts for the 10". Bolt the lift arm extension to the top of the lift arms (#6). Use $\frac{1}{2}$ " x 4" bolts, lock washers and hex nuts for the 7" & 8" and 5/8" x 4 $\frac{1}{2}$ " for the 10".

Bolt the track stops (#27) (Pages 14-18) to the top and near the bottom (4" to 11 ½") of the track (**NOTE: for 41' augers use 31")** using 5/16" x 1" hex bolts, lock washers and hex nuts for 7" & 8" augers and 3/8" x 1" for the 10". The cable anchor (#26) (Pages 14-18) bolts to the very bottom of the track using the same hardware.





WARNING: The bottom of the lift arms bolt to the inside of the welded axle brackets using bolts and lock nuts (7" & 8" - 5/8" x 1 ½", 10" - $\frac{3}{4}$ " x 2 ½"). The right (#3) and left (#4) cross tubes bolt to the undercarriage using ½" x 3" hex bolts, lock washers and hex nuts and to the axle using ½" x 1 ½" hex bolts, lock washers and hex nuts. The R.H. brace is the one with the winch bracket. Make sure it is turned as shown in drawing.

- 6. Pages 19-22: Bolt the mounting plate (#37) to the undercarriage arms using 3/8" x 2 34" bolts, lock washers and hex nuts. The 7" & 8" x 36' augers have the idler pulley on the top of the mounting plate. All other sizes have the pulley underneath the plate. Fit the slots in the winch bracket onto the right hand cross tube and slide against the welded stop. The slots in the winch bracket at 90° to the cross tube are turned up. Bolt in place using two connector plates and 3/8" x 1 1/4" hex bolts, lock washers and hex nuts. Bolt the winch (#38) to the winch bracket on the R.H. cross tube (#3) using 3/8" x 1" hex bolts, lock washers and hex nuts. Flat washers are supplied for bolts which go through slotted holes.
- 7. Pages 19-22: Bolt the swivel pulley holder (#40) to the loops at the top and inside of the undercarriage using 5/16" x 2" hex bolts, lock washers and hex nuts. The pulley holder is offset on the shaft. For 7" & 8" augers turn so the pulley is offset towards the same side as the drive. For 10" augers the pulley is offset to the side opposite the drive.
- 8. Pages 34 & 35: Thread the cable (#1) as shown in the drawing. From the winch the cable goes around the cable pulley on the idler plate. From there you go around the swivel and around the groove in the bottom roller of the track roller assembly. The end of the cable is clamped to the cable anchor at the bottom of the track assembly. Clamp to the winch spool using the clamps supplied with the winch.
- 9. Pages 19-22: A clevis holder (#52) bolts to the top end of one undercarriage arm using a 3/8" x 3" hex bolt, lock washer and hex nut. This holder is used as a place to leave the intake swivel clevis when it is removed prior to inserting the auger in a bin.
- 10. Pages 19-22: Mount the wheels (#36) and tires on the axle using ½" wheel bolts.

PTO BELT DRIVE AUGERS: Pages 23-26.

- 11.a) Install the hanger (#45) between the welded brackets near the bottom of the undercarriage using the 1" shaft (#46) and two 1/4" x 1 1/2" cotter pins. Turn as shown in drawing.
 - b) Bolt the PTO mount assembly (#27) to the hanger using ½" x 1 ½" hex bolts, lock washers and hex nuts.
 - c) Bolt the guard plate (#2) to the back of the 12" pulley guard (#38) using 1/4" x 1/2" hex bolt, lock washers and hex nuts. Slide onto the welded ring on the PTO mount (#27). The guard is held on by a ring (#56) with two 5/16" x 3/4" set screws and hex nuts. Hinge on guard must be up.



- d) Attach the 12" pulley (#8) to the arbor shaft (#28) using a 1/4" key (7" & 8" 2"; 10" 3 3/8") and set screws.
- e) A 13 ¾" pivot arm (#39) bolts to the back of the guard with a 3/8" x 1" hex bolt and lock nut and to the undercarriage with a 3/8" x 2 ¾" hex bolt and lock nut. Turn as shown in drawing.
- f) Bolt a guard plate (#2) to the 6" pulley guard (#1). Attach to the welded ring on the gearbox plate. The guard is held on by a ring (#56) mounted as in Step C. Hinge on guard must be up.
- g) Bolt the 9" long guard pivot arm (#4) to the back of the guard using 5/16" hex bolts, lock washers and hex nuts. A 10 3/4" pivot arm (#5) bolts to the end of the 9" arm and to the undercarriage. Turn arm as shown in drawing.
- h) Mount the 6" pulley on the gearbox. Fasten with a key (7" & 8" 1/4"; 10" 3/8") and set screws.
- i) Align the pulleys with the tube and mount the belts (#55).
- j) All belt drive augers 41' and longer are supplied with a belt idler. The first step in assembly is to bolt the idler guard arm (#63) to the idler mounting plate using 3/8" x 1 ¼" hex bolts, lock washers and hex nuts. Bolt the idler guard (#62) to this arm using 5/16" x 1" hex bolts, lock washers and hex nuts. The idler pulley assembly bolt fits through the slots in the arm and guard. A flat washer on the idler bolt is placed on each side of the slot.
- k) Bolt the belt tightener brackets (#40) under the gearbox with the bevel to the intake end using 3/8" bolts (7" & 8" 2 ¾"; 10" 3"), lock washers and hex nuts. The outer tightener (#41) bolts to the bracket using ½" bolts (7" & 8" 2 ¾"; 10" 3") and lock nuts. The inner tightener tube (#42) slides into the outer and bolts to the bottom of the hanger (#45) using ½" x 3" bolt and lock nut. Tension belts and hold in place using the set screw in the outer tube.
- I) Bolt a guard plate (#3) on the outside of the 6" guard (#1) to cover the opening using ½" x ½" hex bolts, lock washers and hex nuts. Bolt the guard mount (#31) to the outside of the 12" guard with the same size of hardware. Slide the flexible PTO guard (#32) and the guard clamp (#33) onto the PTO shaft. Attach the PTO shaft using ½" key, set screws and clamp bolt. Securely tighten set screws and clamp bolt. After mounting the PTO, clamp on the flexible PTO guard using a 5/16" x 1 ½" hex bolt, lock washer and hex nut.
- m) Bolt the PTO cradle (#49) & (#50) onto the lift arms for transport position. A pin in the cradle keeps the PTO shaft from falling out during transport.
- n) When belts, pulleys and idler are aligned, bolt the bottom edges of both belt guards and the idler guard together using ½" x ½" hex bolts, lock washers and hex nuts.



ENGINE BELT DRIVE AUGERS: Pages 27-30:

- 12.a) Install the hanger (#29) between the welded brackets near the bottom of the undercarriage using the 1" shaft #18 and two ¼" x 1 ½" cotter pins. Turn as shown in drawing.
 - b) The motor mount (#33) should be installed so the handle is toward the axle. Use ½" x 1 ¼" hex bolts, lock washers and hex nuts.
 - c) The motor mount spacer (#37) and the guard mount (#38) fit under the motor base and are bolted on together with the gas motor. The ring on the guard mount is used to clamp on the guard for the motor pulley.
 - d) Bolt the guard plate (#2) to the back of the 12" pulley guard (#1) using ¼" x ½" bolts, lock washers and hex nuts. Slide onto the welded ring on the gearbox plate. The guard is held on by a ring (#41) with two 5/16" x ¾" set screws and hex nuts. Hinge on guard must be up.
 - e) Mount the 12" pulley (#4) on the gearbox using a key (7" & 8" 1/4"; 10" 3/8") and set screws.
 - f) A 10 ¾" pivot arm (#5) bolts to the inside of the guard with a 3/8" x 1" hex bolt and lock nut and to the undercarriage with a 3/8" x 2 ¾" hex bolt and lock nut. Turn as shown in drawing.
 - g) Bolt the clamp plate (#13) to the back of the engine pulley guard. Turn as shown in drawing. Clamp the guard to the welded ring on the guard mount (#38) using 5/16" x 1 1/4" hex bolts, lock washers and hex nuts. Hinge on guard must be up.
 - h) Mount the engine pulley (#39) on the gas engine. This pulley must be supplied by the customer.
 - i) Align the pulleys with the tube and mount the belts (#40).
 - j) All belt drive augers 41' and longer are supplied with a belt idler. The first step in assembly is to bolt the idler guard arm (#45) to the idler mounting plate using 3/8" x 1 ¼" hex bolts, lock washers and hex nuts. Bolt the idler guard (#44) to this arm using 5/16" x 1" hex bolts, lock washers and hex nuts. The idler pulley assembly bolt fits through the slots in the arm and guard. A flat washer on the idler bolt is placed on each side of the slot.
 - k) Bolt the belt tightener brackets (#25) under the gearbox with the bevel to the intake end using 3/8" bolts. (7" & 8" 2 ¾"; 10" 3") lock washers and hex nuts. The outer level rod (#20) bolts to the brackets using ½" bolts (7" & 8" 2 ¾"; 10" 3") and lock nuts. The inner tightener tube (#21) slides into the outer and bolts to the bottom of the hanger (#29) using ½" x 3" bolt and lock nut. Tension belts and hold in place using the set screw in the outer rod.
 - Bolt a guard plate (#3) on the outside of both pulley guards to cover the opening using ¼" x ½" hex bolts, lock washers and hex nuts.
 - m) The quick release on the motor mount (#33) is used when starting the engine and to stop the auger without shutting off the engine.
 - n) When belts, pulleys and idler are aligned, bolt the bottom edges of both guards and idler guard together using ½" x ½" hex bolts, lock washers and hex nuts.



- 13. **DIRECT DRIVE AUGERS**: Pages 30 & 31.
 - a) Bolt the PTO holder (#9) to the welded bracket on the tube using 3/8" x 1" hex bolts lock washers and hex nuts. A pin (#7) holds the PTO in place during transport.
 - b) Mount the PTO guard holder (#14) to the welded ring on the gearbox plate using a 4" I.D. clamp (#15) with 5/16" x 1 1/4" hex bolts, lock washers and hex nuts.
 - c) Slide the flexible PTO guard (#2) and the guard clamp (#3) onto the PTO shaft. Attach the PTO shaft using a key (7" & 8" = ¼"; 10" = 3/8"), set screws and clamp bolt. Securely tighten the set screws and clamp bolt. After mounting the PTO, clamp on the flexible PTO guard using a 5/16" x 1 ½" hex bolt, lock washer and hex nut.



ALERT:


- 14. Re-check and tighten all bolts. Of particular importance are.
 - 1) Cable clamps!!!
 - 2) Bolts on track roller assembly.
 - 3) Bolts on lift arm joining axle and extension tube.
 - 4) Bolts joining undercarriage, cross tubes and axle.
 - 5) Gearbox mounting bolts.
 - 6) Pulley set screws.
 - 7) All bolts on shields.
 - 8) Wheel bolts.
 - 9) Set screws and clamp bolts holding on PTO shaft.
- 15. **NOTE:** 1) Gearbox is shipped without oil. Add oil as described in Section 2.
 - 2) Do not exceed 600 RPM flighting speed when operating auger.
 - 3) An external chain tightener is supplied with all augers.



ALERT:

- 1) High position: it is dangerous to move auger in raised position in vicinity of electrical lines.
- 2) Keep all shields and guards in place.
- 3) Turn off power when servicing or unplugging auger.
- 4) Check that intake guard bolts are tight and that the swivel clevis pin has the hitch pin in place before transporting the auger.



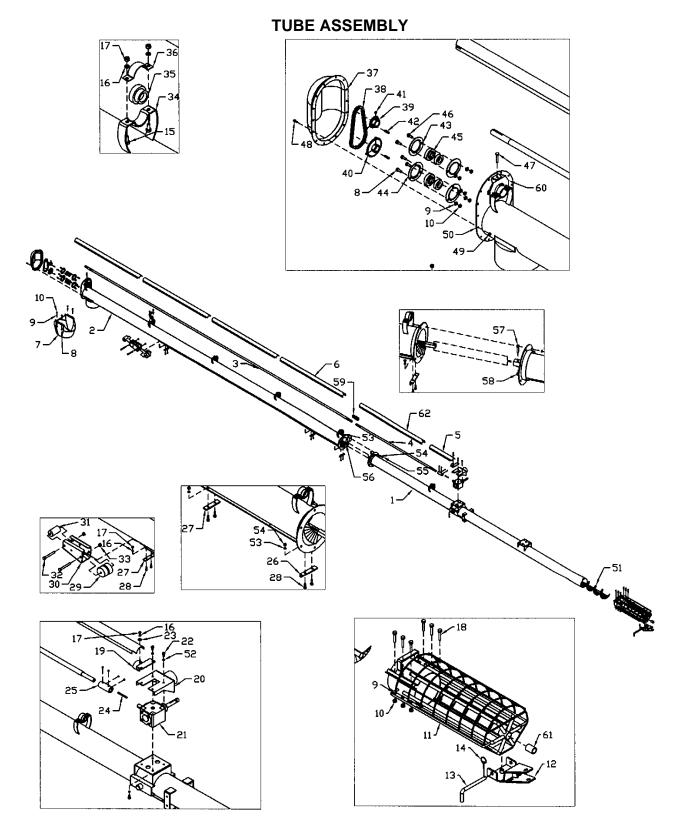

CA-09



WHEN ORDERING PARTS

Always give your dealer the Model, Color and Serial Number of your machine to assist him in ordering and obtaining the correct parts. Use the exploded view and tabular listing of the area of interest to exactly identify the required part.

TUBE ASSEMBLY

| ITEM | PART# | DESCRIPTION |
|------|--------|--|
| 1 | 962075 | 7" x 36' BD Extension Tube 14' Long |
| | 961388 | 7" x 41' BD Extension Tube 19' Long |
| | 961389 | 7" x 46' BD Extension Tube 24' Long |
| | 961391 | 8" x 36' Extension Tube 14' Long |
| | 961392 | 8" x 41' BD Extension Tube 19' Long |
| | 961393 | 8" x 41' DD Extension Tube 19' Long |
| | 961394 | 8" x 46' BD Extension Tube 24' Long |
| | 961395 | 8" x 46' DD Extension Tube 24' Long |
| | 961396 | 8" x 51' BD Extension Tube 29' Long |
| | 961397 | 8" x 51' DD Extension Tube 29' Long |
| | 961398 | 8" x 56' Extension Tube 29' Long |
| | 908891 | 10" x 36' BD Extension Tube 12 1/2' Long |
| | 905382 | 10" x 41' BD Extension Tube 20' Long |
| | 905381 | 10" x 41' DD Extension Tube 20' Long |
| | 961110 | 10" x 51' BD Extension Tube 29' Long |
| | 961111 | 10" x 51' DD Extension Tube 29' Long |
| 2 | 961112 | 7" x 36' Basic Tube 22' Long |
| | 961113 | 7" x 41' Basic Tube 22' Long |
| | 961114 | 7" x 46' & 51' Basic Tube 22' Long |
| | 961115 | 8" x 36' Basic Tube 22' Long |
| | 961116 | 8" x 41' Basic Tube 22' Long |
| | 961117 | 8" x 46' & 51' Basic Tube 22' Long |
| | 961118 | 8" x 56' Basic Tube 27' Long |
| | 906148 | 10" x 36' Basic Tube 22' Long |
| | 905389 | 10" x 41' Basic Tube 20' Long |
| _ | 961120 | 10" x 51' Basic Tube 22' Long |
| 3 | 961732 | 7" & 8" x 36', 41', 46', 8" x 51' Basic Dr. Line 270" Lg |
| | 961471 | 7" & 8" x 56' Basic Drive Line 330" Long |
| | 961262 | 10" x 41' Basic Drive Line 246 1/8" Long |
| 4 | 961121 | 10" x 36' & 51' Basic Drive Line 258 1/2" Long |
| 4 | 961122 | 7" & 8" x 36' Extension Drive Line 16 1/8" Long |
| | 961123 | 7" & 8" x 41' BD Extension Drive Line 80 7/8" |
| | 961836 | 8" x 41' DD Extension Drive Line 148 1/2" |
| | 961840 | 7" & 8" x 46' BD Extension Drive Line 129 7/8" |
| | 961837 | 8" x 46' DD Extension Drive Line 211 5/8" |
| | 961841 | 8" x 51' BD Extension Drive Line 172 7/8" |
| | 961838 | 8" x 51' & 56 DD Extension Drive Line 272" |



| | 906156 | 10" x 36' BD Extension Drive Line 15 5/8" |
|----|--------|---|
| | 906150 | 10" x 36' DD Extension Drive Line 83 7/8" |
| | 905384 | 10" x 41' BD Extension Drive Line 106 5/8" |
| | 961066 | 10" x 41' DD Extension Drive Line 174 1/8" |
| | 961124 | 10" x 51' BD Extension Drive Line 165 1/4" |
| | 961125 | 10" x 51' DD Extension Drive Line 267 3/4" |
| 5 | 961126 | 7" & 8" x 36' Extension Drive Line Shield 22 3/4" |
| J | 961127 | 7" & 8" x 41' BD Extension Drive Line Shield 23" |
| | 961128 | 8" x 41' DD Extension Drive Line Shield 26 1/4" |
| | 961129 | 7" & 8" x 46' BD Extension Drive Line Shield 8 1/8" |
| | 961130 | 8" x 46' DD Extension Drive Line Shield 24 3/4" |
| | 961338 | 8" x 51' BD Extension Drive Line Shield 51 1/4" |
| | 961132 | 8" x 51' DD Extension Drive Line Shield 20 3/4" |
| | 961133 | 8" x 56' Extension Drive Line Shield 12 1/2" |
| | 906088 | 10" x 36' BD Extension Drive Line Shield 17 7/8" |
| | 908894 | 10" x 36' DD Extension Drive Line Shield 31 1/8" |
| | 905388 | 10" x 41' BD Extension Drive Line Shield 21 7/8" |
| | 961135 | 10" x 41' DD Extension Drive Line Shield 41 7/8" |
| | 961136 | 10" x 51' BD Extension Drive Line Shield 46 1/2" |
| | 961137 | 10" x 51' DD Extension Drive Line Shield 40 1/2" |
| 6 | 961848 | 7" & 8" Drive Line Shield 20ga x 6 3/4" x 66" |
| Ü | 001010 | (except 8" x 56') |
| | 961469 | 8" x 56' Drive Line Shield 20ga x 6 3/4" x 54 1/2" |
| | 961264 | 10" x 41' Drive Line Shield 20ga x 6 3/4" x 48 1/4" |
| | 961848 | 10" x 36' & 51' Drive Line Shield 20ga x 6 3/4" x 66" |
| 7 | 961339 | 10" Bolt On Spout |
| 8 | 86170 | 3/8" x 1" Hex Bolt (pl) |
| 9 | 81593 | 3/8" Lock Washer (pl) (8") |
| 10 | 81592 | 3/8" Hex Nut (pl) |
| 11 | 903557 | 7" Intake Guard Weldment |
| | 903556 | 8" Intake Guard Weldment |
| | 903558 | 10" Intake Guard Weldment |
| 12 | 903248 | Clevis Weldment (7" & 8") |
| | 903294 | Clevis Weldment (10") |
| 13 | 903246 | Clevis Pin 5/8" x 9" (7" & 8") |
| | 903293 | Clevis Pin 5/8" x 10 1/2" (7" & 8") |
| 14 | 966729 | 3/16" Linch Pin |
| 15 | 81549 | 5/16" x 3/4" Hex Bolt (pl) |
| | 81552 | 5/16" x 1 1/4" Hex Bolt (pl) (10" x 36') |
| 16 | 81569 | 5/16" Lock Washer (pl) |
| 17 | 81568 | 5/16" Hex Nut (pl) |
| 18 | 811795 | 3/8" x 2" Hex Bolt (pl) |
| 19 | 961345 | Extension Shield Holder (7" & 8") |
| | 961346 | Drive Line Shield Holder (12ga) (10") |
| 20 | 961347 | Gearbox Plate 10ga x 7 1/2" |
| | 961348 | Gearbox Plate 10ga x 9 1/8" |




| 21 | 961092 961085 | 8" Gearbox 8" Reverse Shift Gearbox (optional) |
|----|------------------|---|
| | BU50510 | 10" Gearbox |
| | 961086 | 10" Reverse Shift Gearbox (optional) |
| 22 | 84072 | 3/8" x 3/4" Hex Bolt (pl) (7" & 8") |
| | 81619 | 1/2" x 1" Hex Bolt (pl) (10") |
| 23 | 81570 | 5/16" BS Flat Washer (pl) |
| 24 | 961155 | 1/4" x 1/4" x 3 1/2" Key (except 10" x 36') |
| 25 | 961611 | Gbox Cplg 1 3/4" O.D. x 4" (except 10"x36') |
| 26 | 961349 | Cable Anchor 1/4" x 1" x 1" Angle (7" & 8") |
| | 961350 | Cable Anchor 1/4" x 1 1/2" x 1 1/2" Angle (10") |
| 27 | 961351 | Track Stop 1/4" x 1" x 4 1/4" Long (7" & 8") |
| | 961352 | Track Stop 1/4" x 1 1/2" x 5 1/2" Long (10") |
| 28 | 812026 | 5/16" x 1" Hex Bolt (pl) (8") |
| | 86170 | 3/8" x 1" Hex Bolt (pl) (10") |
| 29 | 901758 | Track Roller 3.35" O.D. x 3 1/2" Long (7" & 8") |
| | 902364 | Track Roller 3.35" O.D. x 4 1/2" Long (10") |
| 30 | 961353 | Track Roller Frame (10ga) (7" & 8") |
| | 961354 | Track Roller Frame (7ga) (10") |
| 31 | 901759 | Rear Track Roller 2" O.D. x 3 1/2" Long (7" & 8") |
| | 902365 | Rear Track Roller 2" O.D. x 4 1/2" Long (10") |
| 32 | 811691 | 1/2" x 4 1/2" Hex Bolt (pl) (7" & 8") |
| | 812087 | 5/8" x 6" Hex Bolt (pl) (10") |
| 33 | 812364 | 1/2" Lock Nut (pl) (7" & 8") |
| | 812482 | 5/8" Lock Nut (pl) (10") |
| 34 | 961430 | 1 1/4" Bearing Stand (7" & 8") |
| | 961989 | 1 3/8" Bearing Stand (10") |
| 35 | 965818 | 1 1/4" Bearing (7" & 8") |
| | 965917 | 1 3/8" Bearing (10") |
| 36 | 961432 | Bearing Holder Cap (7" & 8") |
| | 961990 | Bearing Holder Cap (10") |
| 37 | 961097 | Plastic End Cover (7" & 8") |
| | 961098 | Plastic End Cover (10") |
| 38 | 961954 | #60 Chain (42 Link) (8" BD) |
| | 961860 | #60 Chain (40 1/2 Link) (7" Augers) |
| | 961691 | #60 Chain (34 1/2 Link) (8" DD) |
| | 961047 | #80 Chain (40 Link) (10" BD) |
| | 961181 | #80 Chain (38 Link) (10" DD) |
| 39 | 961684 | 15 Tooth Sprocket #60 (1 1/4" Bore) |
| | 004044 | (7" & 8" Belt and Direct Drive) |
| | 961041 | 15 Tooth Sprocket #80 (1 3/8" Bore) (10" BD) |
| 40 | 961998 | 20 Tooth Sprocket #80 (1 3/8" Bore) (10" DD) |
| 40 | 961686 | 28 Tooth Sprocket #60 (1 1/4" Bore) (7" & 8" BD) |
| | 961684 | 15 Tooth Sprocket #60 (1 1/4" Bore) (8" DD) |
| | 961042 | 28 Tooth Sprocket #80 (1 3/8" Bore) (10" BD) |
| | 961998 | 20 Tooth Sprocket #80 (1 3/8" Bore) (10" DD) |



| | | 5 | _ |
|----------------|---------|--|---|
| 41 | 988999 | 3/8" x 3/8" Socket Set Screw | |
| 42 | 961602 | 1/4" Sq. x 1 1/4" Key (7" & 8") | |
| | 967041 | 5/16" x 5/16" x 1 1/2" Key (10") | |
| 43 | 961091 | 2-Hole 1 1/4" Bearing Flange | |
| 44 | 961675 | 3-Hole 1 1/4" Bearing Flange | |
| 45 | 961676 | 1 1/4" Bearing (7" & 8") | |
| .0 | 965917 | 1 3/8" Bearing W/Collar (10") | |
| 46 | 81914 | 3/8" x 1" Carriage Bolt (br) | |
| 47 | 967291 | 3/8" x 2" Full Thread Bolt (pl) | |
| 48 | 967473 | 1/4" x 3/4" Flange Bolt (pl) | |
| 49 | 967474 | 1/4" Flange Hex Nut (pl) | |
| 5 0 | 961301 | 7" & 8" Auger End Plate | |
| 30 | 961312 | 10" Auger End Plate | |
| E 1 | | | |
| 51 | 961963 | 7" x 14' Extension Auger Flighting (7" x 36') | |
| | 961964 | 7" X 19' Extension Auger Flighting (7" x 41') | |
| | 961965 | 7" X 24' Extension Auger Flighting (7" x 46') | |
| | 961270 | 8" X 14'-5 1/8" Extension Auger Flighting (8" x 36') | |
| | 961726 | 8" X 19' Extension Auger Flighting (8" x 41') | |
| | 961727 | 8" X 24' Extension Auger Flighting (8" x 46') | |
| | 961728 | 8" X 29' Extension Auger Flighting (8" x 51' & 56') | |
| | 906161 | 10" x 14' Extension Auger Flighting (10" x 36') | |
| | 961255 | 10" X 22' Extension Auger Flighting (10" x 41' & 61') | |
| | 961139 | 10" X 29' Extension Auger Flighting (10" x 51') | |
| 52 | 81593 | 3/8" Lock Washer (pl) (7" & 8") | |
| | 81637 | 1/2" Lock Washer (pl) (10") | |
| 53 | 86170 | 3/8" x 1" Hex Bolt (pl) (7" & 8") | |
| | 81620 | 1/2" x 1 1/4" Hex Bolt (pl) (10") | |
| 54 | 81593 | 3/8" Lock Washer (pl) (7" & 8") | |
| | 81637 | 1/2" Lock Washer (pl) (10") | |
| 55 | 81592 | 3/8" Hex Nut (pl) (7" & 8") | |
| | 81636 | 1/2" Hex Nut (pl) (10") | |
| 56 | 961961 | 7" x 22' Basic Auger Flighting (7" x 41', 36', & 46') | |
| | 961725 | 8" x 22' Basic Auger Flighting (8" x 36', 41', 46', & 51') | |
| | 961461 | 8" x 27'-6" Basic Auger Flighting (8" x 56') | |
| | 961256 | 10" x 20' Basic Auger Flighting (10" X 41') | |
| | 962085 | 10" x 22' Basic Auger Flighting (10" X 36' & 51') | |
| 57 | 9812483 | 3/8" x 2" Hex Bolt Gr.8 (pl) (7" & 8") | |
| | 9812368 | 1/2 x 2 3/4" Hex Bolt Gr.8 (pl) (10") | |
| 58 | 812363 | 3/8" Lock Nut (pl) (7" & 8") | |
| | 812364 | 1/2" Lock Nut (pl) (10") | |
| 59 | 961648 | 1 5/16" Sq. x 5 1/2" Cplg (10" Only, not 10"x36'BD) | |
| 60 | 903435 | Chain Tightener Bracket (7" & 8") | |
| - • | 903478 | Chain Tightener Bracket (10") | |
| 61 | 960461 | Brass Bushing 1 3/8" x 1 3/4" Lg (7" & 8") | |
| ٥. | 967915 | Brass Bushing 1 5/8" x 1 3/4" Lg (10") | |
| 62 | 908893 | 10" x 36' DD Extension Drive Line Shield 59 1/4" | |
| 02 | 000000 | TO A GO DD EXISTISION DITYO EITHO OFFICIA GO 1/T | |



UNDERCARRIAGE, AXLE, LIFT ARM ASSEMBLY

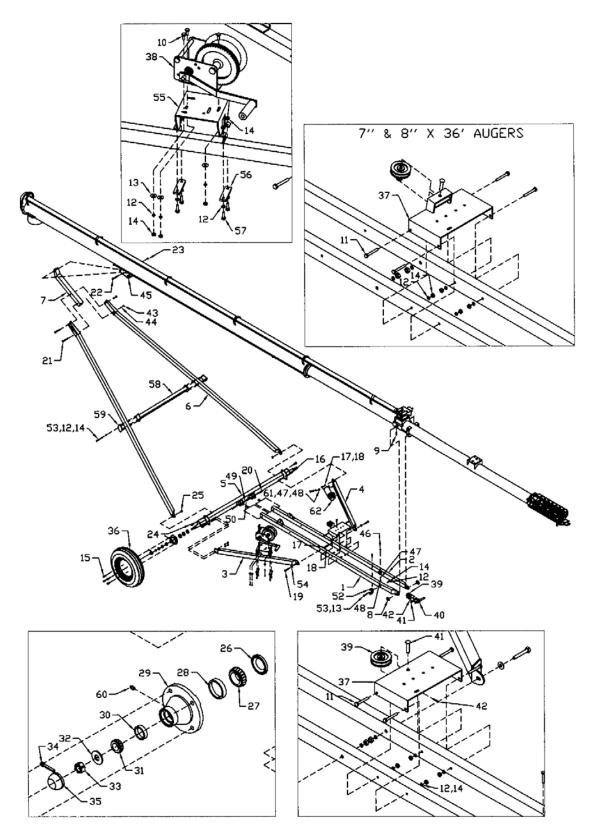

CA-10



UNDERCARRIAGE, AXLE, LIFT ARM ASSEMBLY

| ITEM | PART# | DESCRIPTION |
|------|--|--|
| 1 | 905374 905377 961143 961144 961145 906138 905380 | R.H. Undercarriage 102" (7" & 8" x 36') R.H. Undercarriage 129 1/4" (7" & 8" x 41') R.H. Undercarriage 142" (7" & 8" x 46') R.H. Undercarriage 160" (8" x 51') Undercarriage 165" (8" x 56') R.H. Undercarriage 102" (10" x 36') R.H. Undercarriage 126" (10" x 41') |
| 2 | 961147 905373 905376 961150 961151 906139 905379 961481 | R.H. Undercarriage 154" (10" x 51') L.H. Undercarriage 102" (7" & 8" x 36') L.H. Undercarriage 129 1/4" (7" & 8" x 41') L.H. Undercarriage 142" (7" & 8" x 46') L.H. Undercarriage 160" (8" x 51') L.H. Undercarriage 102" (10" x 36') L.H. Undercarriage 126" (10" x 41') L.H. Undercarriage 154" (10" x 51') |
| 3 | 903404 903405 903406 903526 903407 903408 | R.H. Cross 39 1/4" (7" & 8" & 10" x 36') R.H. Cross 53" (7" & 8" x 41') R.H. Cross 59 1/4" (7" & 8" x 46' & 8" x 51') R.H. Cross 72 3/8" (8" x 56') R.H. Cross 49" (10" x 41') R.H. Cross 63 3/4" (10" x 51') |
| 4 | 961488 961489 961490 961491 961492 961493 | L.H. Cross 39 1/4" (7" & 8" & 10" x 36') L.H. Cross 53" (7" & 8" x 41') L.H. Cross 59 1/4" (7" & 8" x 46' & 8" x 51') L.H. Cross 72 3/8" (8" x 56') L.H. Cross 49" (10" x 41') L.H. Cross 63 3/4" (10" x 51') |
| 5 | 961494 961495 961496 961497 906140 961498 961499 | Axle 3" x 3" x 72" (7" & 8" x 36') Axle 3" x 3" x 83" (7" & 8" x 41') Axle 3" x 3" x 92" (7" & 8" x 46' & 8" x 51') Axle 3" x 3" x 111" (8" x 56') Axle 3" x 3" x 72" (10" x 36') Axle 3" x 3" x 83" (10" x 41') Axle 3" x 3" x 107" (10" x 51') |
| 6 | 961288 961289 961290 961291 961292 F0120 F9917 F9923 | Lift Arm 2" x 3" x 120" (7" & 8" x 36') Lift Arm 2" x 3" x 142" (7" & 8" x 41') Lift Arm 2" x 3" x 174" (7" & 8" x 46') Lift Arm 2" x 3" x 196" (8" x 51') Lift Arm 2" x 3" x 212" (8" x 56') Lift Arm 3" x 3" x 120" (10" x 36') Lift Arm 3" x 3" x 156" (10" x 41') Lift Arm 3" x 3" x 196" (10" x 51') |




```
7
        961329
                      8" Lift Arm Extension
        961330
                      10" Lift Arm Extension
8
        967135
                      1 1/2" Rim Washer (10ga) (pl)
9
        967913
                      5/16" x 2 1/4" Cotter Pin (pl)
10
        86170
                      3/8" x 1" Hex Bolt (pl)
11
                      3/8" x 2 3/4" Hex Bolt (pl)
        967488
12
        81593
                      3/8" Lock Washer (pl)
13
                      3/8" BS Flat Washer (pl)
        84000
14
                      3/8" Hex Nut (pl)
        81592
15
        968404
                      1/2" Wheel Bolt (pl)
16
                      1/2" x 1 1/2" Hex Bolt (pl)
        84277
17
        81637
                      1/2" Lock Washer (pl)
18
        81636
                      1/2" Hex Nut (pl)
19
                      1/2" x 3" Hex Bolt (pl)
        81627
                      1/2" x 3 1/4" Hex Bolt (pl) (7" & 8", & 10" x 31'&36')
20
        81628
                      5/8" x 3 1/2" Hex Bolt (pl) (10")
        81669
21
                      1/2" x 4" Hex Bolt (pl) (7" & 8")
        811752
        81672
                      5/8" x 4 1/2" Hex Bolt (pl) (10")
22
                      1/2" x 4 1/2" Hex Bolt (pl) (7" & 8")
        811691
        812087
                      5/8" x 6" Hex Bolt (pl) (10")
23
        812364
                      1/2" Lock Nut (pl) (7" & 8")
        812482
                      5/8" Lock Nut (pl) (10")
24
        84268
                      5/8" x 1 1/2" Hex Bolt (pl) (7" & 8")
        81684
                      3/4" x 2 1/4" Hex Bolt (pl) (10")
25
        812482
                      5/8" Lock Nut (pl) (7" & 8")
                      3/4" Lock Nut (pl) (10")
        812365
26
        961891
                      Oil Seal (SE 11) (7" & 8")
                      Oil Seal (SE 14X) (10")
        968430
27
        967712
                      Inner Cone (LM67048) (7" & 8")
        967208
                      Inner Bearing Cone (LM48548) (10")
28
        967711
                      Inner Cup (LM67010) (7" & 8")
                      Inner Bearing Cup (LM48510)
        968412
                      4-Bolt Hub (H411) (7" & 8")
29
        105173
            9105173 H411 Hub Assembly
                      5-Bolt Hub W/Bearing Cups (10")
        968403
              968431 H516 Hub Assembly
30
        968405
                      Outer Cup (LM11910) (7", 8", & 10")
31
        968406
                      Outer Cone (LM11949) (7", 8", & 10")
32
                      3/4" S.A.E. Washer
        9812416
33
                      3/4" Slotted Hex Nut (br)
        81834
34
                      1/8" x 1 1/2" Cotter Pin
        9812486
35
        968409
                      Dust Cap (DC12)
36
        F7110
                      15" x 4.5" x 4-Bolt Wheel (7" & 8")
        F0110
                      15" x 5" x 5-Bolt Wheel (10")
```



| 37 | 903538 | Winch Mounting Plate (7" & 8" x 36') |
|----|---------|---|
| | 961296 | Winch Mounting Plate |
| | | (7" & 8" x 41', & 46', 8" x 51', 56') |
| | 961297 | Winch Mounting Plate (10" x 36', 41', & 51') |
| 38 | 961888 | K1550 Winch (7" x 36' & 41') |
| | 961945 | K2550 Winch (8" x 56', 7"& 8" x 46') |
| | | (8" & 10" X 36', 41' & 51') |
| 39 | 961846 | 3 1/2" Cast Cable Pulley |
| 40 | 961333 | Pulley Holder (7" & 8") |
| | 961334 | Pulley Holder (10") |
| 41 | 961010 | 1/2" x 2 1/8" Clevis Pin (pl) |
| 42 | 9812430 | 1/8" x 1" Clevis Pin (pl) |
| 43 | 81636 | 1/2" Hex Nut (pl) (8") |
| | 81676 | 5/8" Hex Nut (pl) (10") |
| 44 | 81637 | 1/2" Lock Washer (pl) (8") |
| | 81677 | 5/8" Lock Washer (pl) (10") |
| 45 | 961385 | Track Roller Assembly (8") |
| | 961386 | Track Roller Assembly (10") |
| 46 | 810640 | 5/16" x 2" Hex Bolt (pl) |
| 47 | 81569 | 5/16" Lock Washer (pl) |
| 48 | 81568 | 5/16" Hex Nut (pl) |
| 49 | 81637 | 1/2" Lock Washer (pl) (7" & 8",10" x 31' & 36') |
| | 81677 | 5/8" Lock Washer (pl) (10") |
| 50 | 81636 | 1/2" Hex Nut (pl) (7" & 8",10" x 31' & 36') |
| | 81676 | 5/8" Hex Nut (pl) (10") |
| 52 | 903392 | Clevis Holder |
| 53 | 81583 | 3/8" x 3" Hex Bolt (pl) (7" & 8") |
| | 81587 | 3/8"X 4" Hex Bolt (pl) (10") |
| 54 | 81638 | 1/2" B.S. Flat Washer (pl) |
| 55 | 903401 | Winch Bracket 8 1/4" x 19" |
| 56 | 903402 | Connector Plate 3/8" x 1 1/4" x 4 3/8" |
| 57 | 81576 | 3/8" x 1 1/4" Hex Bolt |
| 58 | 905154 | X-Brace Weldment 2" x 3" x 44 1/2" |
| 59 | 905152 | X-Brace Plates 4" x 4 1/2" |
| 60 | 967900 | 1/4" Grease Fitting |
| 61 | 810761 | 5/16" x 2 1/2" Hex Bolt (pl) |
| 62 | 909277 | Manual Holder |



PTO BELT DRIVE ASSEMBLY

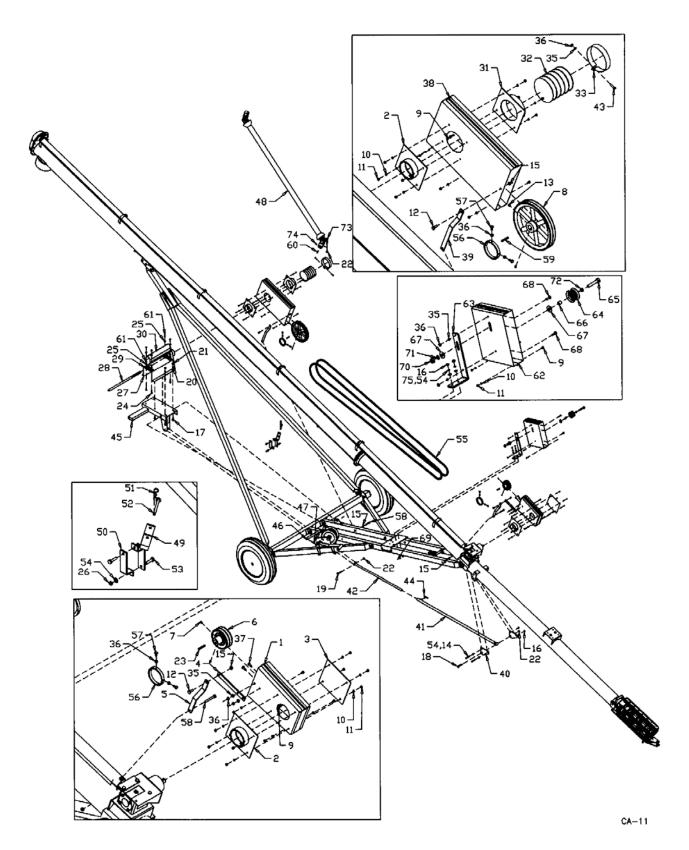



PTO BELT DRIVE ASSEMBLY

| ITEM | PART# | DESCRIPTION |
|------|------------------|---|
| 1 | 961355 | 6" Pulley Guard (7" & 8") |
| | 961356 | 6" Pulley Guard (10") |
| 2 | 961357 | Guard Plate Weldment |
| 3 | 961358 | 8" x 8" Solid Cover Plate |
| 4 | 961359 | Guard Pivot Arm 9" Long |
| 5 | 961360 | Guard Pivot Arm 10 3/4" Long |
| 6 | 966166 | 6" Double Pulley (1" Bore (7" & 8") |
| | 961074 | 6" Triple Pulley (1 1/2") (10") |
| 7 | 9812377 | 5/16" X 3/4" Square Head Set Screw |
| 8 | 961567 | 12" Double Pulley (1" Bore) (7" & 8") |
| | 961004 | 12" Triple Pulley (1 1/4" Bore) (10") |
| 9 | 81523 | 1/4" x 1/2" Hex Bolt (pl) |
| 10 | 81545 | 1/4" Lock Washer (pl) |
| 11 | 81544 | 1/4" Hex Nut (pl) |
| 12 | 86170 | 3/8" x 1" Hex Bolt (pl) |
| 13 | 81213 | 3/8" x 1" Square Head Set Screw |
| 14 | 967488 | 3/8" x 2 3/4" Hex Bolt (pl) (7" & 8") |
| | 81583 | 3/8" x 3" Hex Bolt (pl) (10") |
| 15 | 812363 | 3/8" Lock Nut (pl) |
| 16 | | 3/8" Hex Nut (pl) |
| 17 | | 1/2" x 1 1/4" Hex Bolt (pl) |
| 18 | 81626 | 1/2" x 2 3/4" Hex Bolt (pl) (7" & 8") |
| | 81627 | 1/2" x 3" Hex Bolt (pl) (10") |
| 19 | 81627 | 1/2" x 3" Hex Bolt (pl) |
| 20 | 81637 | 1/2" Lock Washer (pl) |
| 21 | | 1/2" Hex Nut (pl) |
| 22 | 812364 | 1/2" Lock Nut (pl) |
| 23 | 968811 | 1/4" x 1/4" x 2" Key (7" & 8") |
| 0.4 | 967044 | 3/8" x 3/8" x 3 3/8" Key (10") |
| 24 | 81578 | 3/8" x 1 3/4" Hex Bolt (pl) (7" & 8") |
| 05 | 811791 | 1/2" x 2" Hex Bolt (pl) (10") |
| 25 | 84000 | 3/8" Flat Washer (pl) (7" & 8") |
| 00 | 81638 | 1/2" Flat Washer (pl) (10") |
| 26 | 81592 | 3/8" Hex Nut (pl) |
| 27 | 961362 | PTO Mount Weldment (7" & 8") |
| 20 | 961363 | PTO Mount Weldment (10") |
| 28 | 961364 | PTO Arbor Shaft 1 1/4 "Ø x 25" Long (7" & 8") |
| 29 | 961365 961792 | PTO Arbor Shaft 1 1/4"Ø x 25" Long (10") 1" Pillow Bearing W/Collar (7" & 8") |
| 29 | 973223 | 1 1/4" Pillow Bearing W/Collar (10") |
| 30 | 961366 | 20 Gauge x 16 3/16" Arbor Shaft Shield (7" & 8") |
| 30 | 961367 | 20 Gauge x 10 3/10 Arbor Shaft Shield (10") |
| | 30130 <i>1</i> | 20 Gauge X 12 3/4 AIDUI SHAIL SHIEIU (10) |




| 31 | 961368 | Guard Weldment 10ga x 8" x 8" |
|----|---------|--|
| 32 | 961201 | Flexible Guard 6" O.D. x 6 1/2" Long |
| 33 | 961200 | Guard Clamp 16ga x 1 1/4" x 21 1/2" Long |
| 34 | 81552 | 5/16" x 1 1/4" Hex Bolt (pl) |
| 35 | 81569 | 5/16" Lock Washer (pl) |
| 36 | 81568 | 5/16" Hex Nut (pl) |
| 37 | 81549 | 5/16" x 3/4 Hex Bolt (pl) |
| 38 | 961369 | 12" Pulley Guard (8") |
| 50 | 961370 | 12" Pulley Guard (0") |
| 39 | 961371 | Guard Pivot Arm 13 3/4" Long |
| 40 | 961372 | Belt Tghtnr Bracket 7ga x 4" x 6" |
| 41 | 901372 | Outr Tghtnr Tube 1 5/16" O.D. x 55"LG |
| 41 | 900702 | • |
| | 000705 | - (7", 8", & 10" x 36') |
| | 908705 | Outer Tghtnr Tube 1 5/16"OD x 96"LG |
| | 000707 | - (7", 8" & 10" x 41") |
| | 908707 | Outer Tghtnr Tube 1 5/16"OD x 111"LG |
| 40 | 004000 | - (7" & 8" x 46', 10" & 8" x 51') |
| 42 | 961693 | Inner Tghtnr Tube 1" O.D. x 42"LG |
| | 004004 | - (7", 8", & 10" x 41' & 8" x 51' & 10" x 36' & 51') |
| | 961694 | Inner Tghtnr Tube 1"OD x 57"LG |
| 40 | 0.4550 | - (7"& 8" x 46' & 8" x 51') |
| 43 | 81553 | 5/16" X 1 1/2" Hex Bolt (pl) |
| 44 | 961647 | 1/2" Tightener Screw |
| 45 | 961375 | Hanger Weldment (7" & 8") |
| | 961376 | Hanger Weldment (10") |
| 46 | 961377 | Hanger Swivel Shaft 1"Ø x 10 1/2" Long (7" & 8") |
| | 961378 | Hanger Swivel Shaft 1"Ø x 13" Long (10") |
| 47 | 9812434 | 1/4" x 1 1/2" Cotter Pin (p) |
| 48 | F0055 | PTO Shaft (7" & 8") |
| | F7242 | PTO Shaft (10") |
| 49 | 961379 | PTO Holder Weldment (7" & 8") |
| | 961380 | PTO Holder Weldment (10") |
| 50 | 961381 | PTO Holder Bracket (7" & 8") |
| | 961382 | PTO Holder Bracket (10") |
| 51 | 12780 | #7 Hair Pin Clip |
| 52 | 961539 | PTO Holder Pin 3/8"Ø x 4 1/2" Long |
| 53 | 811792 | 3/8" x 1 1/2" Hex Bolt (pl) |
| 54 | 81593 | 3/8" Lock Washer (pl) |
| 55 | 967912 | B-201 V-Belt (7" & 8" x 36') |
| | 906166 | B-212 V-Belt (10" x 36') |
| | 961898 | B-255 V-Belt (2/ 7" & 8" x 41' & 3/ 10" x 41') |
| | 961002 | B-287 V-Belt (7" & 8" x 46') |
| | 961003 | B-300 V-Belt (2/ 8" x 51' & 3/ 10" x 51') |
| 56 | 961383 | Guard Holder Ring 4 1/2" O.D. x 5/8" Long |
| 57 | 9812377 | 5/16" x 3/4" Square Head Set Screw (pl) |
| 58 | 967488 | 3/8" x 2 3/4" Hex Bolt (pl) |
| | | |



| 59 | 961384 | 1/4" x 1/4" x 3 3/8" Key (10") |
|----|--------|--|
| | 968811 | 1/4" x 1/4" x 2" Key (7" & 8") |
| 60 | 968811 | 1/4" x 1/4" x 2" Key |
| 61 | 81592 | 3/8" Hex Nut (pl) (7" & 8") |
| | 81636 | 1/2" Hex Nut (pl) (10") |
| 62 | 903427 | Idler Guard (7" & 8") |
| | 961696 | Idler Guard (10") |
| 63 | 961697 | Idler Guard Arm (7 " & 8") |
| | 903588 | Idler Guard Arm (10") |
| 64 | 961006 | Idler Pulley (7" & 8") |
| | 961001 | Idler Pulley (10") (Single Flange) |
| 65 | 81669 | 5/8" x 3 1/2" Hex Bolt (pl) (7" & 8") |
| | 967911 | 1/2" x 5" Hex Bolt Gr.8 (pl) (10") |
| 66 | 965928 | Spacer .840" O.D. x .109"W x 3/4" Long (7" & 8") |
| | 961699 | Spacer .840" O.D. x .622" I.D. x 1/2" Long (10") |
| 67 | 81678 | 5/8" Flat Washer (pl) (7" & 8") |
| | 81638 | 1/2" Flat Washer (pl) (10") |
| 68 | 812026 | 5/16" x 1" Hex Bolt (pl) |
| 69 | 81576 | 3/8" x 1 1/4" Hex Bolt (pl) |
| 70 | 81676 | 5/8" Hex Nut (pl) (7" & 8") |
| | 81636 | 1/2" Hex Nut (pl) (10") |
| 71 | 81677 | 5/8" Lock Washer (pl) (7" & 8") |
| | 81637 | 1/2" Lock Washer (pl) (10") |
| 72 | 962000 | Spacer .84" O.D. x .622" I.D. x 3/8" Long |
| 73 | 81628 | 1/2" x 3 1/4" Hex Bolt (pl) |
| 74 | 988999 | 3/8" x 3/8" Sckt Set Screw |
| 75 | 84000 | 3/8" Flat Washer BS (pl) |
| | | |



ENGINE DRIVE ASSEMBLY

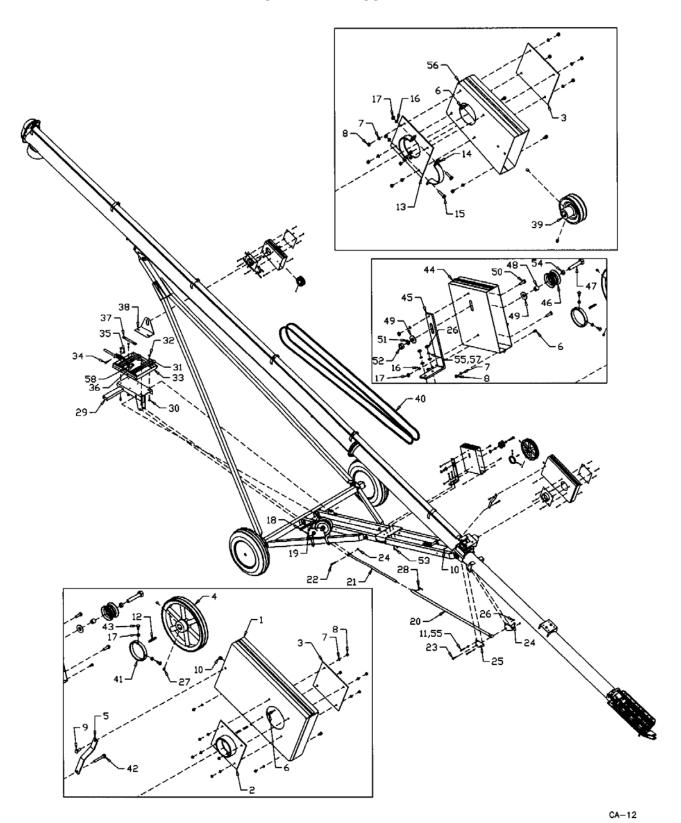



ENGINE BELT DRIVE ASSEMBLY


| ITEM | PART# | DESCRIPTION |
|------|---------|---|
| 1 | 961369 | 12" Guard (7" & 8") |
| | 961370 | 12" Guard (10") |
| 2 | 961357 | Guard Plate Weldment |
| 3 | 961358 | Guard Plate |
| 4 | 961567 | 12" Double Pulley (1" Bore) (7" & 8") |
| | 961187 | 12" Triple Pulley (1 1/2" Bore) (10") |
| 5 | 961360 | Guard Pivot Arm 10 3/4" Long |
| 6 | 81523 | 1/4" x 1/2" Hex Bolt (pl) |
| 7 | 81545 | 1/4" Lock Washer (pl) |
| 8 | 81544 | 1/4" Hex Nut (pl) |
| 9 | 86170 | 3/8" x 1" Hex Bolt (pl) |
| 10 | 812363 | 3/8" Lock Nut (pl) |
| 11 | 967488 | 3/8" x 2 3/4" Hex Bolt (pl) (7" & 8") |
| | 81583 | 3/8" x 3" Hex Bolt (pl) |
| 12 | 968811 | 1/4" x 1/4" x 2" Key (7" & 8") |
| | 967044 | 3/8" x 3/8" x 3 3/8" Key (10") |
| 13 | 962066 | Clamp Weldment |
| 14 | 961896 | Clamp (4" Clamp) |
| 15 | 81552 | 5/16" x 1 1/4" Hex Bolt (pl) |
| 16 | 81569 | 5/16" Lock Washer (pl) |
| 17 | 81568 | 5/16" Hex Nut (pl) |
| 18 | 961377 | Hanger Swivel Shaft 1"Ø x 10 1/2" Long (7" & 8") |
| | 961378 | Hanger Swivel Shaft 1"Ø x 13" Long (10") |
| 19 | 9812434 | 1/4" x 1 1/2" Cotter Pin (pl) |
| 20 | 908702 | Outr Tghtnr Tube 1 5/16" O.D. x 55" Long - (7", 8", & 10" x 36') |
| | 908705 | Outr Tghtnr Tube 1 5/16" O.D. x 96" Long - (7", 8",& 10" x 41') |
| | 908707 | Outr Tghtnr Tube 1 5/16 O.D. x 111" Long - (7&8 x 46' & 8" & 10"x51') |
| 21 | 961693 | Inner Tghtnr Tube 1" O.D. x 42" Long - (7", 8", & 10" x 41' & 10" X 51') |
| | 961694 | Inner Tghtnr Tube 1" O.D. x 57" Long - (7" & 8" x 46' & 8" x 51') |
| 22 | 81627 | 1/2" x 3" Hex Bolt (pl) |
| 23 | 81626 | 1/2" x 2 3/4" Hex Bolt (pl) (7" & 8") |
| | 81627 | 1/2" x 3" Hex Bolt (pl) (10") |
| 24 | 812364 | 1/2" Lock Nut (pl) |
| 25 | 961372 | Belt Tghtnr Bracket 7ga x 4" x 6" |
| 26 | 81592 | 3/8" Hex Nut (pl) |
| 27 | 81213 | 3/8" x 1" Square Head Set Screw |
| 28 | 961647 | 1/2" Tightener Screw |



| 29 | 961375 | Hanger Weldment (7" & 8") |
|----|--------------------|---|
| | 961376 | Hanger Weldment (10") |
| 30 | 81620 | 1/2" x 1 1/4" Hex Bolt (pl) |
| 31 | 81637 | 1/2" Lock Washer (pl) |
| 32 | 81636 | 1/2" Hex Nut (pl) |
| 33 | 908010 | Motor Mount Weldment |
| 34 | 981601 | 7/16" x 2" Hex Bolt (pl) |
| 35 | 86273 | 7/16" Lock Nut (pl) |
| 36 | 961973 | 12" Adjusting Rod |
| 37 | 961167 | Motor Mount Guard Spacer 10" Long |
| 38 | 961166 | Guard Mount |
| 39 | F889 | 3 1/2" Double Pulley 1" Bore (7" & 8") |
| | | 3 1/2" Triple Pulley (10") (By Customer) |
| 40 | 967912 | B-201 V-Belt (7" & 8" x 36') |
| | 906166 | B-212 V-Belt (10" x 36') |
| | 961898 | B-255 V-Belt (27" & 8" x 41' & 3/10" x 41') |
| | 961002 | B-287 V-Belt (7" & 8" x 46') |
| | 961003 | B-300 V-Belt (2/8" x 51' & 3/10" x 51') |
| 41 | 961383 | Guard Holder Ring 4 1/2" O.D. x 5/8" Long |
| 42 | 967488 | 3/8" x 2 3/4" Hex Bolt (pl) |
| 43 | 9812377 | 5/16" x 3/4" Square Head Set Screw (pl) |
| 44 | 903427 | Idler Guard (7" & 8") |
| | 961696 | Idler Guard (10") |
| 45 | 961697 | Idler Guard Arm (7" & 8") |
| | 903588 | Idler Guard Arm (10") |
| 46 | 961006 | Idler Pulley (7" & 8") |
| | 961001 | Idler Pulley (10") (Single Flange) |
| 47 | 81669 | 5/8" x 3 1/2" Hex Bolt (pl) (7" & 8") |
| | 967911 | 1/2" x 5" Hex Bolt Gr.8 (pl) (10") |
| 48 | 965928 | Spacer .840" O.D. x .109"W x 3/4" Lg (7" & 8") |
| | 961699 | Spacer .840" O.D. x .622" I.D. x 1/2" Lg (10") |
| 49 | 81678 | 5/8" Flat Washer (pl) (7" & 8") |
| | 81638 | 1/2" Flat Washer (pl) (10") |
| 50 | 812026 | 5/16" x 1" Hex Bolt (pl) |
| 51 | 81677 | 5/8" Lock Washer (pl) (7" & 8") |
| | 81637 | 1/2" Lock Washer (pl) (10") |
| 52 | 81676 | 5/8" Hex Nut (pl) (7" & 8") |
| | 81636 | 1/2" Hex Nut (pl) (10") |
| 53 | 81576 | 3/8" x 1 1/4" Hex Bolt (pl) |
| 54 | 962000 | Spacer .84" O.D. x .622" I.D. x 3/8" Long (10") |
| | | - Between Idler Halves |
| 55 | 81593 | 3/8" Lock Washer (pl) |
| 56 | 961355 | 6" Pulley Guard (7" & 8") |
| | 961356 | 6" Pulley Guard (10") |
| 57 | 84000 | 3/8" Flat Washer BS (pl) |
| 58 | 811852 | 3/4" Sq. Nut (pl) |
| - | 5 5 5 5 | c eq a. (p.) |



DIRECT DRIVE ASSEMBLY

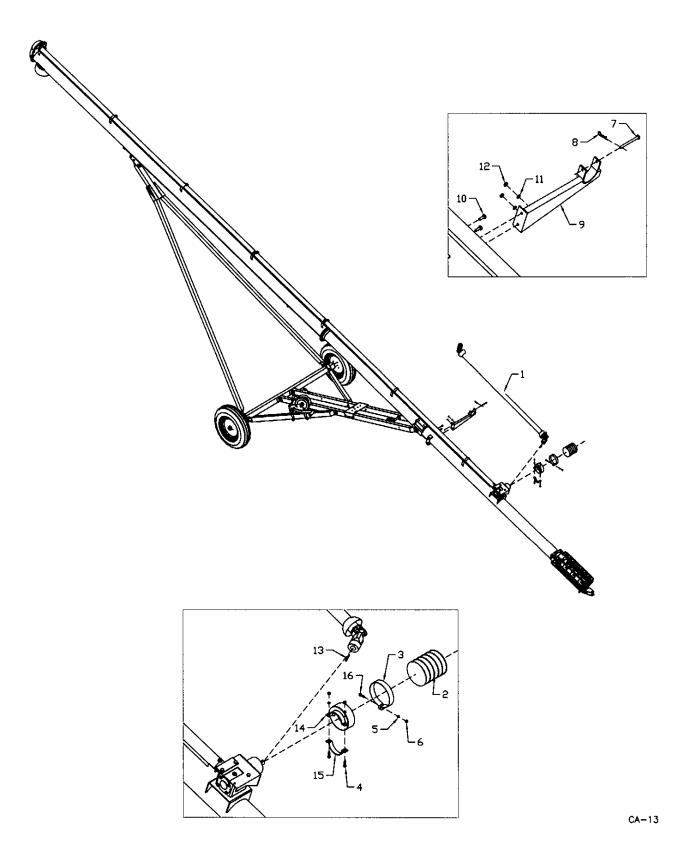




DIRECT DRIVE ASSEMBLY

| ITEM | PART# | DESCRIPTION |
|------|--------|----------------------------------|
| 1 | F0055 | 7" & 8" PTO Shaft |
| | F7240 | 10" PTO Shaft |
| 2 | 961201 | 6" Plastic Tube 6 1/2" Long |
| 3 | 961200 | 6 1/4" x 1 1/4" Guard Clamp |
| 4 | 81552 | 5/16" x 1 1/4" Hex Bolt (pl) |
| 5 | 81569 | 5/16" Lock Washer (pl) |
| 6 | 81568 | 5/16" Hex Nut (pl) |
| 7 | 961539 | 3/8" x 4 1/2" Pin |
| 8 | 12780 | #7 Hair Pin Clip |
| 9 | 961790 | PTO Hanger |
| 10 | 86170 | 3/8" x 1" Hex Bolt (pl) |
| 11 | 81593 | 3/8" Lock Washer (pl) |
| 12 | 81592 | 3/8" Hex Nut (pl) |
| 13 | 968811 | 1/4" x 1/4" x 2" Key (8") |
| | 968807 | 3/8" x 3/8" x 2" Key (10") |
| 14 | 961202 | PTO Guard Holder W/4" I.D. Clamp |
| 15 | 961896 | Clamp 4" I.D. |
| 16 | 81553 | 5/16" X 1 1/2" Hex Bolt (pl) |



BRIDGING ASSEMBLY

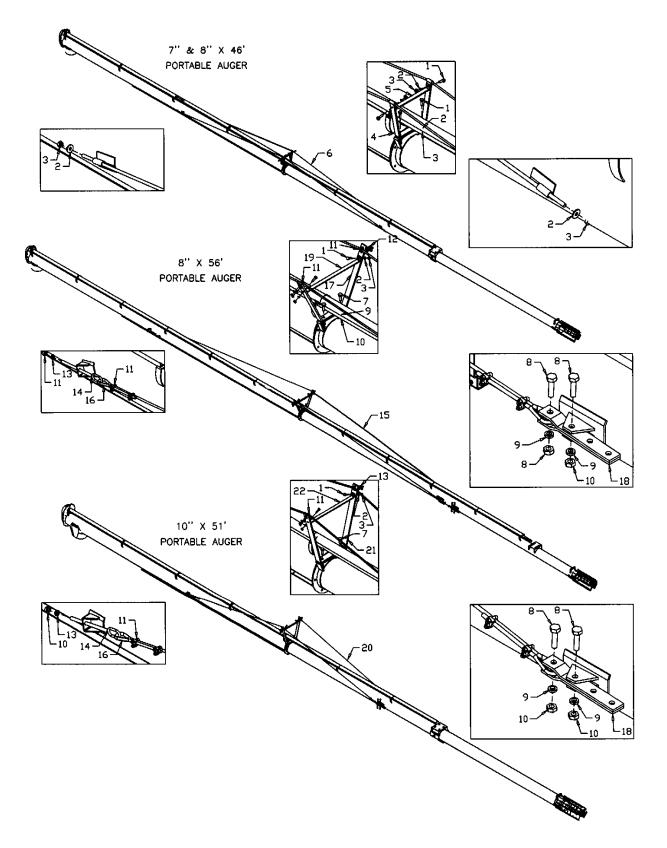





BRIDGING ASSEMBLY

| ITEM | PART# | DESCRIPTION |
|------|--------|--|
| 1 | 81576 | 3/8" x 1 1/4" Hex Bolt (pl) |
| 2 | 81593 | 3/8" Lock Washer (pl) |
| 3 | 81592 | 3/8" Hex Nut (pl) |
| 4 | 962010 | Bridging Bracket Weldment |
| 5 | 962011 | Bridging Cross Brace |
| 6 | 961786 | 3/8" x 20' Tie Rod |
| 7 | 84277 | 1/2" x 1 1/2" Hex Bolt (pl) |
| 8 | 811791 | 1/2" x 2" Hex Bolt (pl) |
| 9 | 81637 | 1/2" Lock Washer (pl) |
| 10 | 81636 | 1/2" Hex Nut (pl) |
| 11 | 964264 | 3/8" Cable Clamps |
| 12 | 964001 | 1" O.D. x .438" I.D. x 10ga Flat Washer (pl) |
| 13 | 81638 | 1/2" B.S. Flat Washer (pl) |
| 14 | 960031 | Cable Tightener 1/2" x 7 7/8" |
| 15 | 961473 | Bridging Cable 3/8" x 31'-3 1/2" Long |
| 16 | 964267 | 3/8" Thimble |
| 17 | F7027 | Bridging Bracket (8" x 56') |
| 18 | 960244 | Cable Yoke 1/4" x 1 1/2" x 10" |
| 19 | 961532 | Bridging Tie Rod 3/16" x 1" x 20" Long |
| 20 | 962012 | 3/8" x 20'-10" Cable |
| 21 | 962013 | Bridging Yoke (10" x 51') |
| 22 | 962014 | Bridging Tie Bar (10" x 51') |



CABLE ASSEMBLY

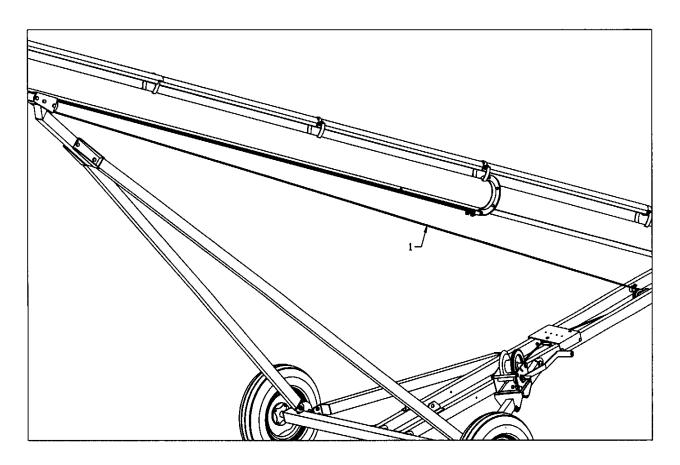

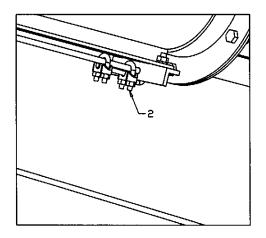

CA-15




CABLE ASSEMBLY PARTS LIST

| ITEM | PART# | DESCRIPTION |
|------|--|--|
| 2 | 962076 962077 962078 962079 962080 962081 962082 962083 962084 961658 | 1/4" Cable 32'-6" Long (7" x 36') 5/16" Cable 32'-6" Long (8" & 10" x 36') 1/4" Cable 46'-10" Long (7" x 41') 5/16" Cable 46'-10" Long (8" x 41') 5/16" Cable 49'-3" Long (7" & 8" x 46') 5/16" Cable 54'-3" Long (8" x 51') 5/16" Cable 58'-5 1/2" Long (8" x 56') 5/16" Cable 47'-10" Long (10" x 41') 5/16" Cable 55'-3" Long (10" x 51') 1/4" Cable Clamp (7" x 36' & 41') |
| | 961763 | 5/16" Cable Clamp |



CLAMP-ON MOTOR MOUNT

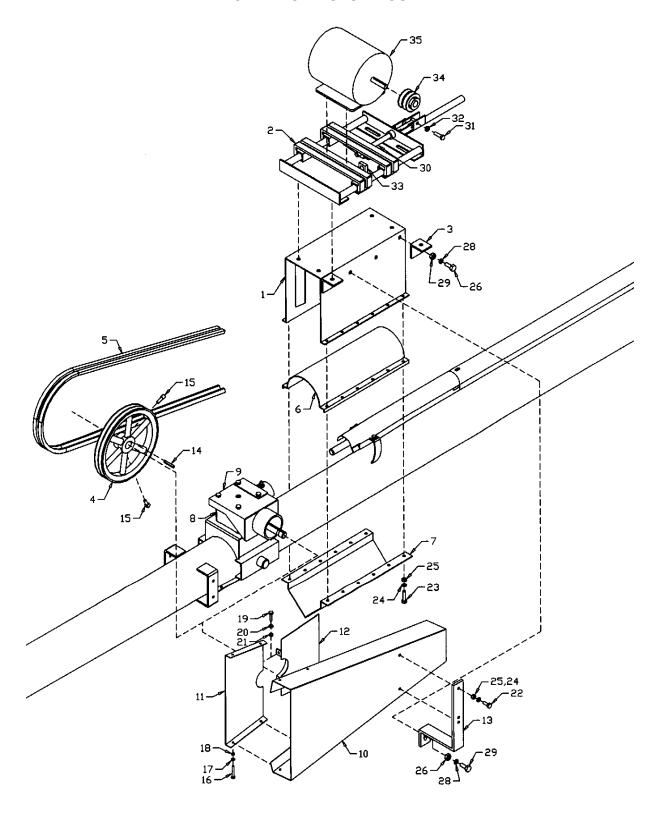

CA-16



CLAMP-ON MOTOR MOUNT PARTS LIST

| ITEM | PART# | DESCRIPTION |
|------|---------|--|
| 1 | 961195 | 7" Motor Mount stand |
| | 961196 | 8" Motor Mount Stand |
| | 961184 | 10" Motor Mount Stand |
| 2 | 907360 | Motor Mount Weldment |
| | 907361 | Motor Mount Assembly (Threaded Rod Included) |
| 3 | 961186 | Angle Iron |
| 4 | 961567 | 12" Double Pulley 1" bore - 7" & 8" (Ex. 8" x 56') |
| | 961478 | 12" Trpl Pulley 1"bore - 8" x 56' |
| | 961187 | 12" Trpl Pulley 1 1/2" bore - 10" |
| 5 | 973621 | Set of two B-62 Belts - 7" & 8" (Ex. 8" x 56') |
| | 973417 | B-83 V-Belt (3 req'd.) - 10" & 8" x 56' |
| 6 | 961457 | 7" Round Clamp |
| | 961164 | 8" Round Clamp |
| | 961191 | 10" Round Clamp |
| 7 | 961458 | 7" V-Clamp |
| | 961165 | 8" V-Clamp |
| | 961192 | 10" V-Clamp |
| 8 | 961092 | 7" & 8" Gearbox |
| | BU50510 | 10" Gearbox |
| 9 | 961347 | 7" & 8" Gearbox Plate |
| | 961348 | 10" Gearbox Plate |
| 10 | F1870 | Belt Guard (33" long) - 7" & 8" (Ex. 8" x 56') |
| | F1871 | Belt Guard (42 1/2" long) - 10" & 8" x 56' |
| 11 | 961159 | 7" & 8" Bolt-on Guard Insert - Ex. 8" x 56' |
| | 961157 | 10" & 8" x 56' Bolt-on Guard Insert |
| 12 | 961160 | 7" & 8" Clamp-on Guard Insert - Ex. 8" x 56' |
| | 961158 | 10" & 8" x 56' Clamp-on Guard Insert |
| 13 | 961161 | Guard Bracket (7") - 21 3/4" |
| | 961162 | Guard Bracket (8" & 10") - 21" |
| 14 | 968811 | 1/4" sq. x 2" key - 7" & 8" |
| | 968807 | 3/8" sq. x 2" key - 10" |
| 15 | 81213 | 3/8" x 1" sq. hd. set screw |
| 16 | 81525 | 1/4" x 3/4" Hex Bolt |
| 17 | 81545 | 1/4" Lock Washer |
| 18 | 81544 | 1/4" Hex Nut |
| 19 | 81552 | 5/16" x 1 1/4" Hex Bolt |
| 20 | 81569 | 5/16" Lock Washer |
| 21 | 81568 | 5/16" Hex Nut |
| 22 | 86170 | 3/8" x 1" Hex Bolt |
| 23 | 81578 | 3/8" x 1 3/4" Hex Bolt |
| 24 | 81593 | 3/8" Lock Washer |
| 25 | 81592 | 3/8" Hex Nut |



| 26 | 81620 | 1/2" x 1 1/4" Hex Bolt |
|-----|--------|---|
| 27 | 81638 | 1/2" B.S. Flat Washer |
| 28 | 81637 | 1/2" Lock Washer |
| 29 | 81636 | 1/2" Hex Nut |
| 30 | 961973 | 12" Adjusting Rod |
| 31 | 981601 | 7/16" x 2" Hex Bolt |
| 32 | 86273 | 7/16" Lock Nut |
| 33 | 811852 | 3/4" Sq. Nut (pl) |
| *34 | | Motor Pulley (Supplied by customer) |
| *35 | | Electric Motor (Supplied by Customer) |
| | *5 | SEE INSTRUCTIONS FOR CORRECT PULLEY AND MOTOR SIZES |



CLAMP-ON MOTOR MOUNT INSTRUCTIONS


NOTE: Clamp-on Motor Mount can only be used on Direct Drive 10" x 36' Augers.

- 1. The procedure for installing the kit is the same for belt drive or direct drive. Bolt the motor mount stand (#1) and the two clamps (#6) and (#7) together on the tube with 3/8" x 1 3/4" hex bolts, lock washers and hex nuts. Bolt the two angle irons (#3) to the side of the stand so they are flush with the top of the stand.

 NOTE: The angle irons and the two extra holes on the side of the stand near the center must be on the same side as the guard.
- 2. Bolt the electric motor (#34) to the motor mount and mount a pulley (#33) (both supplied by customer). Use a double pulley for 7" and 8" augers (except 8" x 56') and a triple pulley for 10" and 8" x 56' augers. Do not tighten bolts until both pulleys are aligned. The electric motor must be 1725 rpm. **Motor sizes are:** 7" & 8" x 36' = 4 hp; 7" & 8" x 41' 5hp; 7" & 8" x 46' 7 ½ hp; 7" & 8" x 51' 10 hp/ 8" x 56' 15 hp; 10" x 41' 10hp; 10" x 51' 15 hp. **Pulley sizes are:** Direct Drive 3 ½"; Belt Drive 6"
- 3. Mount the 12" pulley (#4) on the gearbox using key and set screws supplied (double pulley for 7" & 8", except 8" x 56', and triple pulley for 10" & 8" x 56'). After aligning the two pulleys with the auger tube, tighten motor mount bolts and pulley set screws. Mount belts (#5) on the pulleys. The motor mount handle acts as a belt tightener.
- 4. Bolt the guard insert (#11) to the belt guard (#10) using ¼" x ¾" hex bolts, lock washers and hex nuts. The guard assembly is then clamped to the ring on the gearbox plate using clamp (#12) and 5/16" x 1 ¼" hex bolts, lock washers and hex nuts. The other end of the guard is held on by a guard bracket (#13) which bolts to the guard using 3/8" x 1" bolts and to the motor mount stand using a ½" x 1 ¼" bolt. Center the guard on the motor pulley before tightening bolts.



No. 1550 Winch 961888 – 7" x 36' & 41' AUGERS

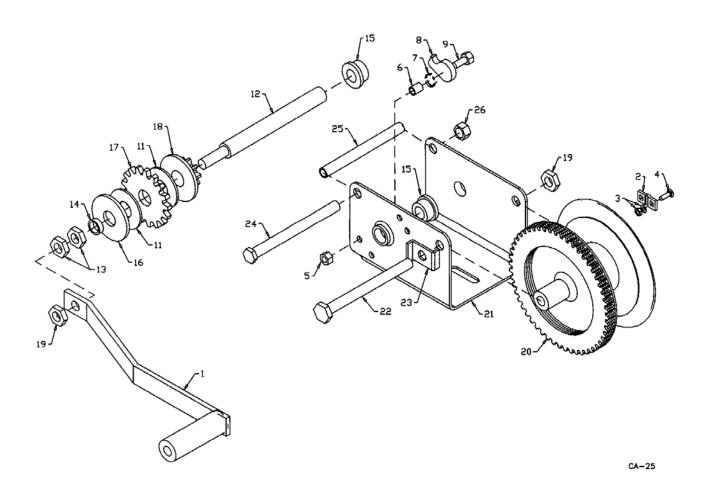



No. 1550 WINCH PARTS LIST


961888 - 7" x 36' & 41' AUGERS

| ITEM | PART NAME | PART# |
|-----------------|-------------------------|---------|
| 1 | Handle Assembly | 2461S01 |
| CABLE KEEPER | KIT | 5621S01 |
| 2 | Cable Clamp | |
| 3 | Lockwasher & Nut | |
| 4 | Carriage Bolt | |
| RATCHET KIT | | 6730S00 |
| 5 | 5/16" Lock Nut | |
| 6 | Ratchet Spacer | |
| 7 | Ratchet Spring | |
| 8 | Ratchet Pawl | |
| 9 | Shoulder Bolt | |
| 11 | Brake Disc Kit | 1558S00 |
| INPUT SHAFT KIT | Γ | 1563S01 |
| 12 | Input Shaft | |
| 13 | 1/2" Lock Nut | |
| 14 | Spacer | |
| 15 | Bushing | |
| 16 | Shaft Brake Disc | |
| 17 | Ratchet Gear | |
| 18 | Pinion & Disc Assembly | |
| 19 | 1/2" Lock Nut | * |
| | | |
| 20 | Drum Assembly | * |
| 21 | Frame | * |
| 22 | 1/2" x 5 3/4" Cap Screw | * |
| 23 | Drum Spacer | * |
| 24 | 3/8" x 5 3/4" Cap Screw | * |
| 25 | Frame Spacer | * |
| 26 | 3/8" Lock Nut | * |
| | * Not Available | |



No. K2550 WINCH

961945 - 7" x 46' & 51'; 8" & 10" AUGERS

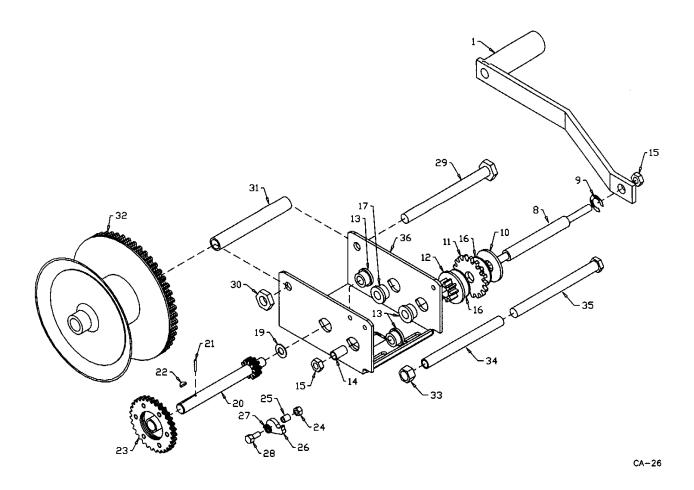

PART#



ITEM

DESCRIPTION


NO. K2550 WINCH PARTS LIST - 961945 - 7" x 46', 51'; 8" & 10" AUGERS

| IIEW | DESCRIPTION | PARI# |
|-------------------|--------------------|----------|
| | | |
| 4 | l l o o ello | 2461S01 |
| 1 CABLE KEEPER KI | Handle | 5621S01 |
| 4 | Bolt | 3021301 |
| 5 | Cable Clamp | |
| 6 | Lockwasher | |
| 7 | Nut | |
| | Nut | |
| INPUT SHAFT KIT | | 1565\$01 |
| 8 | Input Shaft | . 33333 |
| 9 | Retaining Ring | |
| 10 | Brake Disc | |
| 11 | Ratchet Gear | |
| 12 | Pinion Gear | |
| 13 | Bushing | |
| 14 | Spacer | |
| 15 | Nut | |
| | | |
| 16 | Friction Disc | 1578\$00 |
| | | |
| INTERMEDIATE | SHAFT KIT | 1569S01 |
| 17 | Bushing | |
| 19 | Washer | |
| 20 | Intermediate Shaft | |
| 21 | Roll Pin | |
| 22 | Woodruff Key | |
| 22 | | |
| 23 | Gear | |
| RATCHET KIT | | 6730S00 |
| 24 | Nut | 0,00000 |
| 25 | Spacer | |
| 26 | Ratchet Pawl | |
| 27 | Spring | |
| 28 | Shoulder Bolt | |
| <u> </u> | | |
| 29 | Drum Bolt | * |
| 30 | Lock Nut | * |
| 31 | Drum Spacer | * |
| 32 | Drum Assembly | * |
| 33 | Lock Nut | * |
| 34 | Frame Spacer | * |
| 35 | Bolt | * |
| 36 | Frame | * |
| | | |
| BUSHING KIT | | 906537 |
| 13 | Bushing | |
| 17 | Bushing | |
| | | |

^{*} NOT AVAILABLE



PTO ASSEMBLY

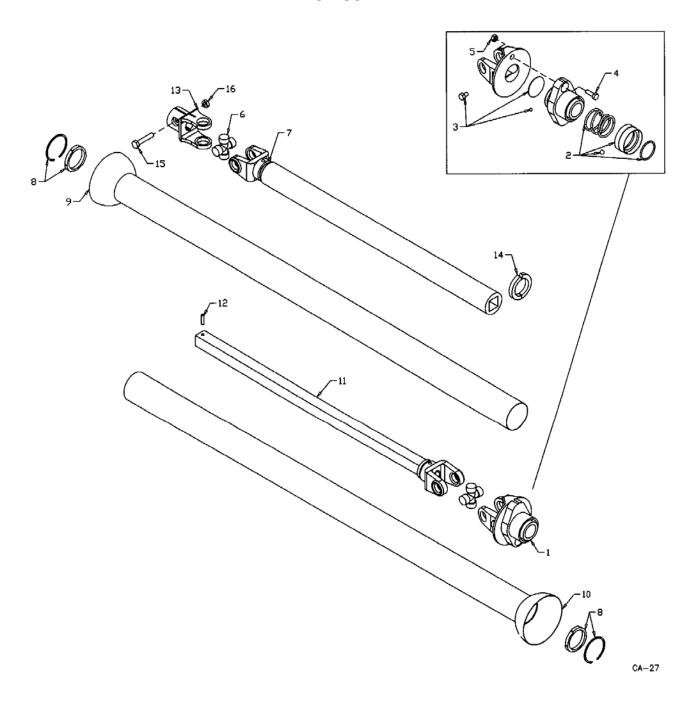



7" & 8" Belt Drive & Direct Drive Auger PTO Assembly

| Item # | Part # | Description |
|--------|--------|--|
| | F0444 | Shaft Complete |
| | 908953 | Tractor Half of PTO (shear) |
| | 905952 | Implement Half of PTO |
| 1 | 936308 | Shear Assembly |
| 2 | 936168 | Spring-Lok Repair Kit |
| | | - (Collar, Spring, Ret. Ring, 2 - 3/8" Balls) |
| 3 | 936248 | Shear Assembly Repair Kit |
| | | - (3/8" x 1/2" Bolt, Blank, 24 - 1/4" Balls) |
| 4 | 812026 | 5/16" x 1" Shear Bolt (Grade 5) - one required |
| 5 | 812362 | 5/16" Lock Nut |
| 6 | 936079 | Repair Kit |
| 7 | 936309 | Yoke & Tube |
| 8 | 936387 | Bearing & Snap Ring Kit |
| 9 | 908951 | Inner Guard |
| 10 | 907399 | Outer Guard |
| 11 | 936314 | Yoke & Shaft |
| 12 | 936315 | 1/4" x 1" Roll Pin |
| 13 | 936374 | Clamp Yoke |
| 14 | 936316 | Shield Bearing |
| 15 | 811795 | 3/8" x 2" Hex Bolt |
| 16 | 812363 | 3/8" Lock Nut |



10" Direct Drive Auger PTO Assembly

| Item # | Part # | Description |
|--------|--------|---|
| | F0466 | Shaft Complete |
| | 908960 | Tractor Half of PTO (shear) |
| | 908958 | Implement Half of PTO |
| 1 | 936324 | Shear Assembly |
| 2 | 936168 | Spring-Lok Repair Kit |
| | | (Collar, Spring, Ret. Ring, 2 3/8" Balls) |
| 3 | 936248 | Shear Assembly Repair Kit |
| | | (3/8" x 1/2" Bolt, (Grade 5) - one required |
| 4 | 86170 | 3/8" x 1" Shear Bolt (Grade 5) - one required |
| 5 | 812363 | 3/8" Lock Nut |
| 6 | 936093 | Repair Kit |
| 7 | 936325 | Yoke & Tube |
| 8 | 936320 | Nylon Bearing Repair Kit |
| 9 | 908956 | Inner Guard |
| 10 | 907397 | Outer Guard |
| 11 | 936329 | Yoke & Shaft |
| 12 | 936315 | 1/4" x 1" Roll Pin |
| 13 | 936376 | Clamp Yoke |
| 14 | 936316 | Shield Bearing |
| 15 | 81628 | 1/2" x 3 1/4" Hex Bolt |
| 16 | 812364 | 1/2" Lock Nut |




10" Belt Drive Auger PTO

| Item # | Part # | Description |
|--------|--------|---|
| | F0467 | Shaft Complete |
| | 908960 | Tractor Half of PTO (Shear) |
| | 908959 | Implement Half of PTO |
| 1 | 936324 | Shear Assembly |
| 2 | 936168 | Spring-Lok Repair Kit |
| | | (Collar, Spring, Ret. Ring, 2 3/8" Balls) |
| 3 | 936248 | Shear Assembly Repair Kit |
| | | (3/8" x 1/2" Bolt, Blank, 24 1/4" Balls) |
| 4 | 86170 | Shear Bolt - 3/8" x 1" (Gr.5) |
| 5 | 812363 | 3/8" Lock Nut |
| 6 | 936093 | Repair Kit |
| 7 | 936325 | Yoke & Tube |
| 8 | 936320 | Nylon Bearing Repair Kit |
| 10 | 908956 | Inner Guard |
| 11 | 908397 | Outer Guard |
| 12 | 936329 | Yoke & Shaft |
| 13 | 936315 | Roll Pin (1/4" x 1") |
| 14 | 936262 | Clamp Yoke |
| 15 | 936316 | Shield Bearing |
| 16 | 81628 | 1/2" x 3 1/4" Hex Bolt |
| 17 | 812364 | 1/2" Lock Nut |



7" & 8" CONVENTIONAL AUGER GEARBOX

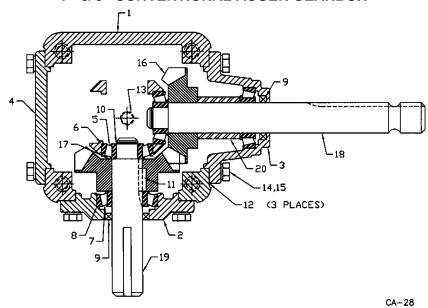


961092 - Gearbox Parts List

| Item | Part # | Description |
|------|--------|----------------------------|
| | 961092 | Gearbox Complete |
| 1 | 961315 | Housing |
| 2 | 961316 | Bearing Cap |
| 3 | 961317 | Bearing Cap |
| 4 | 961318 | Cover Cap |
| 5 | 93020 | Bearing Cone (LM11749) |
| 6 | 93019 | Bearing Cup (LM11710) |
| 7 | 966776 | Bearing Cone (I44643 |
| 8 | 966777 | Bearing Cup (L44610) |
| 9 | 961319 | Seal (Nat. #470553) |
| 10 | 961320 | Retainer |
| 11 | 961321 | Key 1/4" sq. x 3/4" long |
| 12 | 961322 | Shim .005 A/R |
| | | Shim .0075 A/R |
| | | Shim .020 A/R |
| 13 | 960818 | Pipe Plug, 1/4" NPT |
| 14 | 81549 | 5/16" x 3/4" Hex Bolt |
| 15 | 81569 | 5/16" Lock Washer |
| 16 | 961323 | Gear, 90 degree Bevel, 19T |
| 17 | 961324 | Shim, Bearing Spacer |
| 18 | 961325 | Shaft |
| 19 | 961326 | Shaft |
| 20 | 961327 | Spacer Bearing |



#961085 - REVERSE GEARBOX

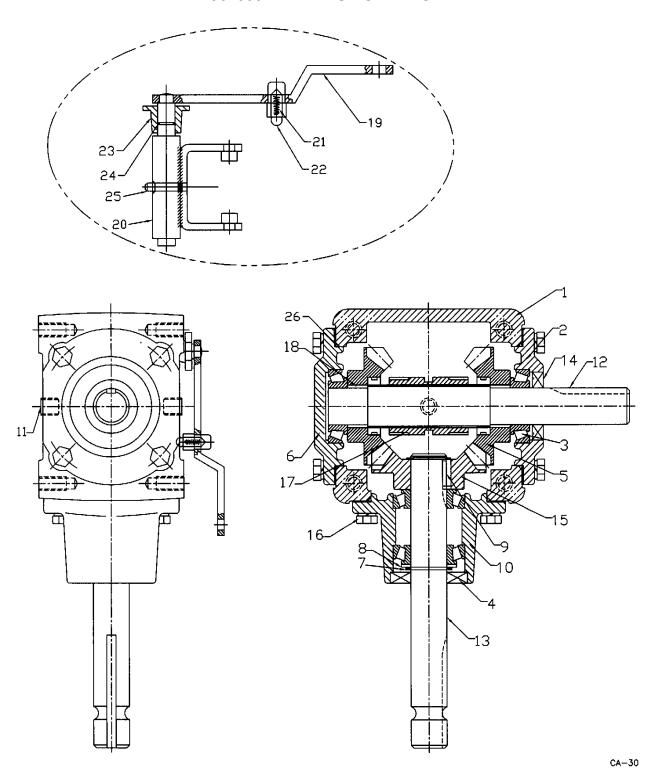




961085 - Reverse Gearbox Parts List

| Item | Part # | Description |
|-------|--------|---------------------------|
| | 961085 | Gearbox Complete |
| 1 | 906670 | Case |
| 2 | 906671 | End Cap |
| 3 | 966777 | Bearing (L44643&L44610) |
| 4 | 906673 | Seal |
| 5 | 906672 | Gear |
| 6 | 961316 | End Cap |
| 7 | 906674 | Snap Ring |
| 8 | 906675 | Shim |
| 9 | 961321 | Key |
| 10 | 906676 | Quill |
| 11 | 906677 | 3/8" NPT Solid Plug |
| 12 | 906678 | Output Shaft |
| 13 | 906679 | Input Shaft |
| 14 | 961319 | Seal |
| 15 | 906680 | Input Gear |
| 16 | 906681 | Cap Screw, 3/8" UNC x 3/4 |
| 17 | 906682 | Dog |
| 18 | 906683 | Bronze Bushing |
| 19-25 | 906684 | Complete Lever Assembly |
| 26 | 907450 | O-Ring |




BU50510 - Gearbox Parts List

| Item # | Part # | Description |
|--------|------------|------------------------|
| | BU50510 | Gearbox Complete |
| 1 | BU50310 | Gearbox Casting Only |
| 2 | BU500089-3 | Pipe Plug |
| 3 | BU50457 | Gearbox Cover |
| 4 | BU500167-1 | Relief Valve |
| 5 | BU50458 | Gearbox Gasket |
| 6 | BU50509 | Cross Shaft |
| 7 | BU50502 | Pinion Shaft |
| 8 | BU50329 | Bevel Gear 1 1/2" B |
| 9 | BU50331 | Bevel Gear 1 3/8" B |
| 10 | BU50428 | Adjusting Nut |
| 11 | BU50444 | Adjusting Nut |
| 12 | BU50422-1 | Oil Seal (3 Used) |
| 13 | BU50415 | Retainer Ring (4 Used) |
| 14 | BU575902 | Bearing Cup (2 Used) |
| 15 | BU575901 | Bearing Cone (2 Used) |
| 16 | BU50429 | Key |
| 17 | BU50210X | Shim Set |
| 18 | BU575907 | Bearing Cup (2 Used) |
| 19 | BU575906 | Bearing Cone (2 Used) |
| 20 | BU50417-1 | Key |

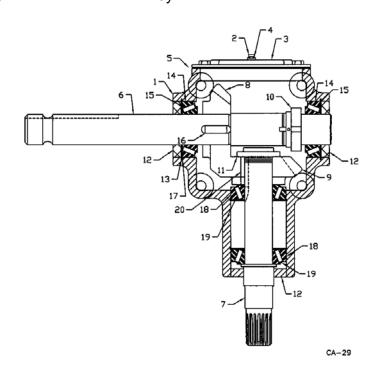



961086 REVERSE GEARBOX

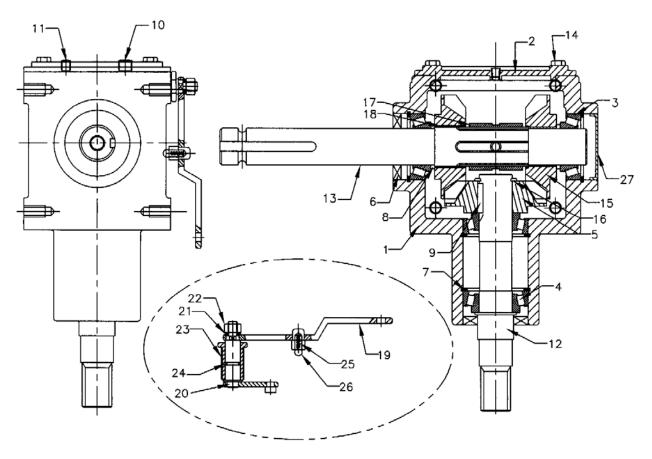

CA-31



961086 - Reverse Gearbox Parts List

| Item | Part # | Description |
|-------|--------|-------------------------|
| | 961086 | Gearbox Complete |
| 1 | 906690 | Case |
| 2 | 906691 | End Cap |
| 3 | 906692 | Bearing (13620&13687) |
| 4 | 906693 | Bearing (14276&14137) |
| 5 | 906694 | Gear |
| 6 | 906695 | Seal |
| 7 | 906696 | Snap Ring |
| 8 | 906697 | Shim |
| 9 | 906698 | Key |
| 10 | 906699 | ZG 1/8"-27 Vent Plug |
| 11 | 906700 | 3/8" NPT Solid Plug |
| 12 | 906701 | Output Shaft |
| 13 | 906702 | Input Shaft |
| 14 | 906703 | Bolt 5/16" UNC x 3/4" |
| 15 | 906704 | Gears |
| 16 | 906705 | Snap Ring |
| 17 | 906706 | Dog |
| 18 | 906707 | Bronze Bushes |
| 19-26 | 906708 | Complete Lever Assembly |
| 27 | 907453 | Stamping Cap |
| | | |



7" AUGERS – SHIPPING BUNDLES

| QUANTITY | BUNDLE | |
|----------|--------|-------------|
| REQUIRED | NUMBER | DESCRIPTION |

7" x 36' DOUBLE BELT ENGINE DRIVE AUGERS: C736E

| 1 | F7708 | Basic Auger, 7" x 22' |
|----------|-------|---------------------------|
| <u> </u> | | o , |
| 1 | F7709 | Extension Auger, 7" x 14' |
| 1 | F0591 | Crate of Parts |
| 1 | F0045 | Undercarriage & Axle |
| 1 | F8823 | Lift Arms & Tube |

7" x 41' DOUBLE BELT ENGINE DRIVE AUGERS: C741E

| 1 | F7700 | Basic Auger, 7" x 22' |
|---|-------|---------------------------|
| 1 | F7701 | Extension Auger, 7" x 19' |
| 1 | F0593 | Crate of Parts |
| 1 | F0044 | Undercarriage & Axle |
| 1 | F7705 | Lift Arms & Tube |
| 1 | F0619 | Outer Level Tube, 96" |

7" x 46' DOUBLE BELT ENGINE DRIVE AUGERS: C746E

| 1 | F7710 | Basic Auger, 7" x 22' |
|---|-------|---------------------------|
| 1 | F7711 | Extension Auger, 7" x 24' |
| 1 | F0595 | Crate of Parts |
| 1 | F8819 | Undercarriage & Axle |
| 1 | F8824 | Lift Arms & Tube |
| 1 | F0620 | Outer Level Tube, 111" |

7" x 36' BELT-DRIVE PTO AUGERS: C736P

| 1 | F7708 | Basic Auger, 7" x 22' |
|---|-------|---------------------------|
| 1 | F7709 | Extension Auger, 7" x 14' |
| 1 | F8912 | Crate of Parts |
| 1 | F0045 | Undercarriage & Axle |
| 1 | F8823 | Lift Arms & Tube |



7" AUGERS - SHIPPING BUNDLES - cont'd.

| QUANTITY | BUNDLE | |
|----------|--------|-------------|
| REQUIRED | NUMBER | DESCRIPTION |

7" x 41' BELT-DRIVE PTO AUGERS: C741P

| 1 | F7700 | Basic Auger, 7" x 22' |
|---|-------|---------------------------|
| 1 | F7701 | Extension Auger, 7" x 19' |
| 1 | F0044 | Undercarriage & Axle |
| 1 | F7705 | Lift Arms & Tube |
| 1 | F8881 | Crate of Parts |
| 1 | F0619 | Outer Level Tube, 96" |

7" x 46' BELT-DRIVE PTO AUGERS: C746P

| 1 | F7710 | Basic Auger, 7" x 22' |
|---|-------|---------------------------|
| 1 | F7711 | Extension Auger, 7" x 24' |
| 1 | F0557 | Crate of Parts |
| 1 | F8819 | Undercarriage & Axle |
| 1 | F8824 | Lift Arms & Tube |
| 1 | F0620 | Outer Level Tube, 111" |

55



8" AUGERS – SHIPPING BUNDLES

| QUANTITY | BUNDLE | |
|----------|--------|-------------|
| REQUIRED | NUMBER | DESCRIPTION |

8" x 36' DOUBLE BELT ENGINE DRIVE AUGERS: C836E

| 1 | F8802 | Basic Auger, 8" x 22' |
|---|--------|---------------------------|
| 1 | 1 0002 | Dasic Auger, 6 X 22 |
| 1 | F8803 | Extension Auger, 8" x 14' |
| 1 | F0045 | Undercarriage & Axle |
| 1 | F8823 | Lift Arms & Tube |
| 1 | F0592 | Crate of Parts |

8" x 41' DOUBLE BELT ENGINE DRIVE AUGERS: C841E

| 1 | F0044 | Undercarriage & Axle |
|---|-------|---------------------------|
| 1 | F7705 | Lift Arms & Tube |
| 1 | F8805 | Basic Auger, 8" x 22' |
| 1 | F8807 | Extension Auger, 8" x 19' |
| 1 | F0594 | Crate of Parts |
| 1 | F0619 | Outer Level Tube, 96" |

8" x 46' DOUBLE BELT ENGINE DRIVE AUGERS: C846E

| 1 | F8809 | Basic Auger, 8" x 22' |
|---|-------|---------------------------|
| 1 | F8811 | Extension Auger, 8" x 24' |
| 1 | F8819 | Undercarriage & Axle |
| 1 | F8824 | Lift Arms & Tube |
| 1 | F0596 | Crate of Parts |
| 1 | F0620 | Outer Level Tube, 111" |

8" x 51' DOUBLE BELT ENGINE DRIVE AUGERS: C851E

| 1 | F8809 | Basic Auger, 8" x 22' |
|---|-------|---------------------------|
| 1 | F8813 | Extension Auger, 8" x 29' |
| 1 | F8820 | Undercarriage & Axle |
| 1 | F8825 | Lift Arms & Tube |
| 1 | F0597 | Crate of Parts |
| 1 | F0620 | Outer Level Tube, 111" |

8" x 36' BELT-DRIVE PTO AUGERS: C836P

| _ | | |
|---|-------|---------------------------|
| 1 | F8802 | Basic Auger, 8" x 22' |
| 1 | F8803 | Extension Auger, 8" x 14' |
| 1 | F0045 | Undercarriage & Axle |
| 1 | F8823 | Lift Arms |
| 1 | F8879 | Crate of Parts |



8" AUGERS - SHIPPING BUNDLES - cont'd.

| QUANTITY REQUIRED | | DESCRIPTION | | |
|---|--|---|--|--|
| 8" x 41' BELT | -DRIVE PTO | AUGERS: C841P | | |
| 1 1 1 1 1 | F0044 F7705 F8805 F8807 F8884 F0619 | Undercarriage & Axle Lift Arms & Tube Basic Auger, 8" x 22' Extension Auger, 8" x 19' Crate of Parts Outer Level Tube, 96" | | |
| 8" x 46' BELT | -DRIVE PTO | AUGERS: C846P | | |
| 1 1 1 1 1 | F8809 F8811 F8819 F8824 F8888 F0620 | Basic Auger, 8" x 22' Extension Auger, 8" x 24' Undercarriage & Axle Lift Arms & Tube Crate of Parts Outer Level Tube, 111" | | |
| 8" x 51' BELT | 8" x 51' BELT-DRIVE PTO AUGERS: C851P | | | |
| 1 1 1 1 1 | F8809 F8813 F8820 F8825 F8894 F0620 | Basic Auger, 8" x 22' Extension Auger, 8" x 29' Undercarriage & Axle Lift Arms & Tube Crate of Parts Outer Level Tube 111" | | |
| 8" x 36' DIRECT DRIVE PTO AUGERS: C836D | | | | |

| 1 | F8803 | Extension Auger, 8" x 14' |
|---|-------|---------------------------|
| 1 | F8804 | Basic Auger, 8" x 22' |
| 1 | F0045 | Undercarriage & Axle |
| 1 | F8823 | Lift Arms |
| 1 | F8880 | Crate of Parts |

8" x 41' DIRECT DRIVE PTO AUGERS: C841D

| 1 | F0044 | Undercarriage & Axle |
|---|-------|---------------------------|
| ı | F0044 | Undercarriage & Axie |
| 1 | F7705 | Lift Arms & Tube |
| 1 | F8806 | Basic Auger, 8" x 22' |
| 1 | F8808 | Extension Auger, 8" x 19' |
| 1 | F8885 | Crate of Parts |



8" AUGERS - SHIPPING BUNDLES - cont'd.

| QUANTITY | BUNDLE | |
|----------|--------|-------------|
| REQUIRED | NUMBER | DESCRIPTION |

8" x 46' DIRECT DRIVE PTO AUGERS: C846D

| 1 | F8810 | Basic Auger, 8" x 22' |
|---|-------|---------------------------|
| 1 | F8812 | Extension Auger, 8" x 24' |
| 1 | F8819 | Undercarriage & Axle |
| 1 | F8824 | Lift Arms & Tube |
| 1 | F8890 | Crate of Parts |

8" x 51' DIRECT DRIVE PTO AUGERS: C851D

| 1 | E0010 | Pagia Augar 9" v 22' |
|---|-------|---------------------------|
| I | F8810 | Basic Auger, 8" x 22' |
| 1 | F8814 | Extension Auger, 8" x 29' |
| 1 | F8820 | Undercarriage & Axle |
| 1 | F8825 | Lift Arms & Tube |
| 1 | F8893 | Crate of Parts |

8" x 56' DIRECT DRIVE PTO AUGERS: C856D

| 1 | F8815 | Basic Auger, 8" x 27' |
|---|-------|---------------------------|
| 1 | F8816 | Extension Auger, 8" x 29' |
| 1 | F8821 | Undercarriage & Axle |
| 1 | F8826 | Lift Arms & Tube |
| 1 | F0421 | Crate of Parts |



10" AUGERS – SHIPPING BUNDLES

| QUANTITY | BUNDLE | |
|----------|--------|-------------|
| REQUIRED | NUMBER | DESCRIPTION |

10" x 36' TRIPLE BELT ENGINE DRIVE AUGERS: C1036E

| 1 | F0119 | Undercarriage & Axle |
|---|-------|----------------------|
| 1 | F0120 | Lift Arm Bundle |
| 1 | | |
| 1 | F0121 | Top Section |
| 1 | F0635 | Bottom Section |
| 1 | F0642 | Crate of Parts |

10" x 41' TRIPLE BELT ENGINE DRIVE AUGERS: C1041E

| 1 | F0048 | Bottom Section |
|---|-------|-----------------------|
| 1 | F9904 | Top Section |
| 1 | F0046 | Undercarriage & Axle |
| 2 | F9917 | Lift Arms |
| 1 | F0600 | Crate of Parts |
| 1 | F0619 | Outer Level Tube, 96" |
| | | |

10" x 51' TRIPLE BELT ENGINE DRIVE AUGERS: C1051E

| 1 | F9906 | Bottom Section |
|---|-------|-----------------------|
| 1 | F9908 | Top Section |
| 1 | F9922 | Undercarriage & Axle |
| 2 | F9923 | Lift Arms |
| 1 | F9924 | Axle |
| 1 | F0601 | Crate of Parts |
| 1 | F0620 | Outer Level Tube, 111 |

10" x 36' BELT-DRIVE PTO AUGERS: C1036P

| 1 | F0119 | Undercarriage & Axle |
|---|-------|----------------------|
| 1 | F0120 | Lift Arm Bundle |
| 1 | F0121 | Top Section |
| 1 | F0635 | Bottom Section |
| 1 | F0127 | Crate of parts |



10" AUGERS - SHIPPING BUNDLES - cont'd.

| QUANTITY | BUNDLE | |
|----------|--------|-------------|
| REQUIRED | NUMBER | DESCRIPTION |

10" x 41' BELT-DRIVE PTO AUGERS: C1041P

| 1 | F0048 | Bottom Section |
|---|-------|-----------------------|
| 1 | F9904 | Top Section |
| 1 | F0046 | Undercarriage & Axle |
| 2 | F9917 | Lift Arms |
| 1 | F0049 | Crate of parts |
| 1 | F0619 | Outer Level Tube, 96" |

10" x 51' BELT-DRIVE PTO AUGERS: C1051P

| 1 | F9906 | Bottom Section |
|---|-------|------------------------|
| 1 | F9908 | Top Section |
| 1 | F9922 | Undercarriage Arms |
| 2 | F9923 | Lift Arms |
| 1 | F9924 | Axle |
| 1 | F0481 | Crate of Parts |
| 1 | F0620 | Outer Level Tube, 111' |

10" x 36' DIRECT DRIVE PTO AUGERS: C1036D

| 1 | F0119 | Undercarriage & Axle |
|---|-------|----------------------|
| 1 | F0120 | Lift Arm Bundle |
| 1 | F0638 | Bottom Section |
| 1 | F0314 | Top Section |
| 1 | F0639 | Crate of Parts |

10" x 41' DIRECT DRIVE PTO AUGERS: C1041D

| 1 | F0047 | Bottom Section |
|---|-------|----------------------|
| 1 | F9905 | Top Section |
| 1 | F0046 | Undercarriage & Axle |
| 2 | F9917 | Lift Arms |
| 1 | F9944 | Crate of Parts |
| | | |

10" x 51' DIRECT DRIVE PTO AUGERS: C1051D

| 1 | F9907 | Bottom Section |
|---|-------|--------------------|
| 1 | F9909 | Top Section |
| 1 | F9922 | Undercarriage Arms |
| 2 | F9923 | Lift Arms |
| 1 | F9924 | Axle |
| 1 | F0479 | Crate of Parts |
| | | |



CLAMP-ON MOTOR MOUNT KITS

7" AUGER CLAMP-ON MOTOR MOUNT KIT: Y0063

| QUANTITY REQUIRED | BUNDLE NUMBER | DESCRIPTION |
|----------------------|------------------|--------------------------------|
| 1 | F1862 | 7" Clamp on Motor Mount Bundle |
| 1 | F1866 | Carton of Parts |
| 1 | F1870 | Belt Guard |

8" AUGER CLAMP-ON MOTOR MOUNT KIT (EXCEPT 8" x 56'): Y0064

| 1 | F0588 | 8" Clamp on Motor Mount Bundle |
|---|-------|--------------------------------|
| 1 | F1867 | Carton of Parts |
| 1 | F1870 | Belt Guard |

8" x 56' AUGER CLAMP-ON MOTOR MOUNT KIT: Y0065

| 1 | F0588 | 8" Clamp on Motor Mount Bundle |
|---|-------|--------------------------------|
| 1 | F1868 | Carton of Parts |
| 1 | F1871 | Belt Guard |

10" AUGER CLAMP-ON MOTOR MOUNT KIT: Y0067

| 1 | F1869 | Carton of Parts |
|---|-------|---------------------------------|
| 1 | F1871 | Belt Guard |
| 1 | F0589 | 10" Clamp on Motor Mount Bundle |

OPTIONS:

| F3003 8" Flexible Spout (galvanized) F3004 10" Flexible Spout (galvanized) F212 7" Poly Spout F213 8" Poly Spout F214 10" Poly Spout F210 Std. Flex Hopper F211 Bid Daddy Hopper F211 Bid Daddy Hopper F890 Battery Box F0013 Reflective Safety Decal Kit Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) Y104 Auger Mover (46', 51', & 56' Auger) | F3002 | 7" Flexible Spout (galvanized) |
|---|-------|-------------------------------------|
| F212 7" Poly Spout F213 8" Poly Spout F214 10" Poly Spout F210 Std. Flex Hopper F211 Bid Daddy Hopper F890 Battery Box F0013 Reflective Safety Decal Kit Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F3003 | 8" Flexible Spout (galvanized) |
| F213 8" Poly Spout F214 10" Poly Spout F210 Std. Flex Hopper F211 Bid Daddy Hopper F890 Battery Box F0013 Reflective Safety Decal Kit Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F3004 | 10" Flexible Spout (galvanized) |
| F214 10" Poly Spout F210 Std. Flex Hopper F211 Bid Daddy Hopper F890 Battery Box F0013 Reflective Safety Decal Kit Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F212 | 7" Poly Spout |
| F210 Std. Flex Hopper F211 Bid Daddy Hopper F890 Battery Box F0013 Reflective Safety Decal Kit Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F213 | 8" Poly Spout |
| F211 Bid Daddy Hopper F890 Battery Box F0013 Reflective Safety Decal Kit Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F214 | 10" Poly Spout |
| F890 Battery Box F0013 Reflective Safety Decal Kit Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F210 | Std. Flex Hopper |
| F0013 Reflective Safety Decal Kit Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F211 | Bid Daddy Hopper |
| Y0029 Safety Light Kit Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F890 | Battery Box |
| Y107 Auger Mover (36' Auger) Y108 Auger Mover (41' Auger) | F0013 | Reflective Safety Decal Kit |
| Y108 Auger Mover (41' Auger) | Y0029 | Safety Light Kit |
| ` ` ` , | Y107 | Auger Mover (36' Auger) |
| Y104 Auger Mover (46', 51', & 56' Auger) | Y108 | Auger Mover (41' Auger) |
| | Y104 | Auger Mover (46', 51', & 56' Auger) |

NOTES

NOTES

DIVISION LOCATIONS

Farm King Division 301 Mountain Street S. Morden, MB R6M 1X7 Ph.: (204) 822-4467 Fax: (204) 822-6348

Allied Division 1201 Regent Ave. W.

Box 1003

Winnipeg, MB R2C 3B2 Ph.: (204) 661-8711 Fax: (204) 654-2503

Inland Division 675 Washington Ave. Winnipeg, MB R2K 1M4 Ph: (204) 667-7854 Fax: (204) 669-2599

B.I.I. Division 1330 43rd Street N.W. Fargo, ND 58102 Ph: (701) 282-7014 Fax: (701) 282-5865

U.S. WAREHOUSES

AR, West Memphis (870) 732-3132

GA, Stone Mountain (770) 908-9439

IA, Lakeview (712) 657-8585

ID, Meridian (208) 887-6006

IN, Clarksville (812) 284-3376

KS, Wichita (316) 265-9577

MN, Lakeville (952) 469-5267

MT, Billings (406) 248-7771 ND, Bismarck (701) 223-1886

ND, Fargo (701) 282-7003

NY, Syracuse (315) 463-5276

OH, Youngstown (330) 793-0862

OR, Portland (503) 234-0378

SD, Huron (605) 352-8616

TX, Houston (713) 928-2632

UT, Salt Lake City (801) 972-4321

WI, Portage (608) 742-1370

CANADIAN WAREHOUSES

B.C., Abbotsford (604) 864-2665

AB, Edmonton (403) 962-6991

SK, Regina (306) 781-2300

ON, Woodstock (519) 539-0435

ON, Jasper (613) 283-1758

QC, Dorion (450) 455-4840

OFFSHORE WAREHOUSES

Burando Hill Katanning W. Australia 011-618-98-214422

Chihuahua, Mexico 011-52-158-90306 John Kerr Equipment Ltd. Wilcoxholm Farm Linlithgow, W. Lothian Scotland 011-441-506-842280

Skovde, Sweden 011-46-500-452651

Naestved, Denmark 011-45-557-29511



Buhler Manufacturing "a partnership"

301 Mountain Street S. Morden MB. R6M 1X7

Ph.: (204) 822-4467 Fax: (204) 822-6348 www.buhler.com